

# LED FIRE SM ADV IP65

Advanced Surface Mounted IP65 Emergency Luminaire

## FEATURES

- Non-maintained operation
- Fully compliant (AS/NZS 2293)
- Weatherproof IP65 rating
- Low energy consumption (avg. 0.4W)
- Wall, ceiling and rod mounting (with rod mount kit)
- High quality LiFePO4 battery
- Available in black or white
- Works with DALI-2 wired monitoring control systems



ORDERING INFORMATION	
Order code	11549
Description	Ledfire Advanced Surface Mount IP65 DALI - Black - D63
Driver Type	DALI DT1 Emergency
Item Code	EV-LED FIRE-SM-ADV-IP65-B-DA

MECHANICAL	
Body Material	Polycarbonate
Fitting Colour	Black
Installation Type	Surface mount
IP Rating	IP65

ELECTRICAL	
Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	2 W
Standby Power	0.4 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
Working Temp Range	0 to 40 °C

DRIVER	
Driver Included	Yes
Integrated Driver	Yes
Driver Type	DALI DT1 Emergency
Wiring Type	Re-wireable terminal block (5 pin)

EMERGENCY (EM SUFFIX)	
Replacement Battery Code	18096
Emergency Classification	C0:D63, C90:D63
Emergency Control	DALI Monitored (DT1)
DALI Monitored ~ Supports Emergency test and monitoring over DALI (IEC62386) with full compliance to IEC62386-202.	
Emergency Duration	90 mins
Emergency Lumen Output	320 lm
Emergency Mode	Non-Maintained
Emergency Output Power	2200 mW

COMPLIANCE	
Product Design Life	8 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	
Standards	AS/NZS 60598.1 AS 60598.2.22 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15 AS/NZS 2293.3

## WARRANTY

**Commercial Use Warranty** 6 RTB (Total 6 Years)

## DIMENSIONS

**Product Height** 48 mm

**Product Length** 145 mm


**Product Width** 145 mm

## LINE DRAWINGS

EV/LEDFIRE/SM/ADV/IP65

## PHOTOMETRICS

EV/LEDFIRE/SM/ADV/IP65/DA

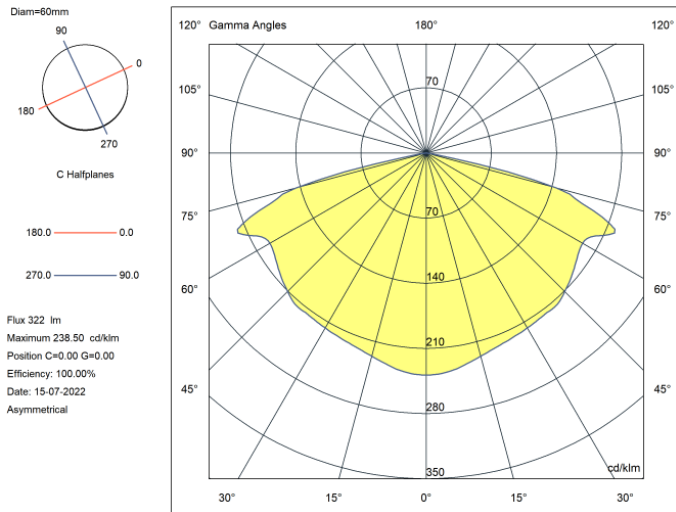

# LED FIRE SM ADV IP65

Advanced Surface Mounted IP65 Emergency Luminaire

## FEATURES

- Non-maintained operation
- Fully compliant (AS/NZS 2293)
- Weatherproof IP65 rating
- Low energy consumption (avg. 0.4W)
- Wall, ceiling and rod mounting (with rod mount kit)
- High quality LiFePO4 battery
- Available in black or white
- Works with Lynk wireless monitoring control systems



ORDERING INFORMATION	
Order code	11551
Description	Ektor Lynk Advanced Ledfire Surface Mount IP65 - Black - D63 - W/Wireless
Driver Type	Wireless (IEC62386-104) with DT1
Item Code	EV-LED FIRE-SM-ADV-IP65-B-LK

MECHANICAL	
Body Material	Polycarbonate
Fitting Colour	Black
Installation Type	Surface mount
IP Rating	IP65

ELECTRICAL	
Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	2 W
Standby Power	0.4 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
Working Temp Range	0 to 40 °C

DRIVER	
Driver Included	Yes
Integrated Driver	Yes
Driver Type	Wireless (IEC62386-104) with DT1
Wiring Type	Re-wireable terminal block (3 pin)

EMERGENCY (EM SUFFIX)	
Replacement Battery Code	18096
Emergency Classification	C0:D63, C90:D63
Emergency Control	IEC62386-104 (Wireless DT1)
IEC62386-104 ~ Supports wireless test and monitoring over IEC62386-104 using IEC62386-202.	
Emergency Duration	90 mins
Emergency Lumen Output	320 lm
Emergency Mode	Non-Maintained
Emergency Output Power	2200 mW

COMPLIANCE	
Product Design Life	8 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	
Standards	AS/NZS 60598.1 AS 60598.2.22 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15



AS/NZS 2293.3

### WARRANTY

**Commercial Use Warranty** 6 RTB (Total 6 Years)

### DIMENSIONS

**Product Height** 48 mm

**Product Length** 145 mm


**Product Width** 145 mm

### LINE DRAWINGS

EV/LED FIRE/SM/ADV/IP65

### PHOTOMETRICS

EV/LED FIRE/SM/ADV/IP65/DA

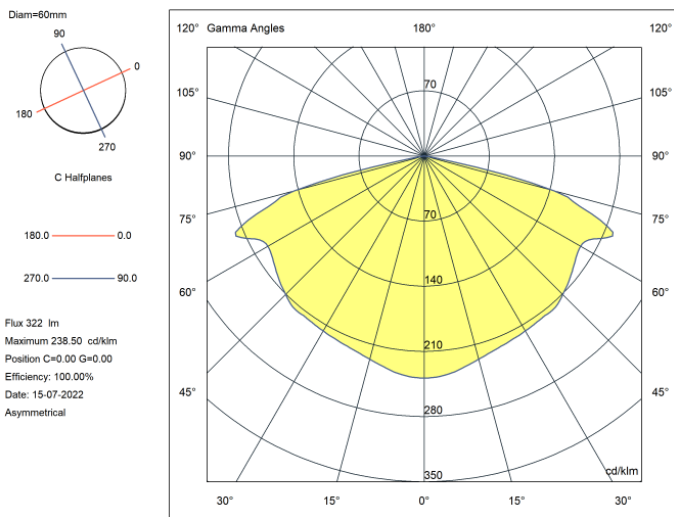

# LED FIRE SM ADV IP65

Advanced Surface Mounted IP65 Emergency Luminaire

## FEATURES

- Non-maintained operation
- Fully compliant (AS/NZS 2293)
- Weatherproof IP65 rating
- Low energy consumption (avg. 0.4W)
- Wall, ceiling and rod mounting (with rod mount kit)
- High quality LiFePO4 battery
- Available in black or white
- Works with DALI-2 wired monitoring control systems



ORDERING INFORMATION	
Order code	11548
Description	Ledfire Advanced Surface Mount IP65 DALI - D63
Driver Type	DALI DT1 Emergency
Item Code	EV-LED FIRE-SM-ADV-IP65-DA

MECHANICAL	
Body Material	Polycarbonate
Fitting Colour	White
Installation Type	Surface mount
IP Rating	IP65

ELECTRICAL	
Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	2 W
Standby Power	0.4 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
Working Temp Range	0 to 40 °C

DRIVER	
Driver Included	Yes
Integrated Driver	Yes
Driver Type	DALI DT1 Emergency
Wiring Type	Re-wireable terminal block (5 pin)

EMERGENCY (EM SUFFIX)	
Replacement Battery Code	18096
Emergency Classification	C0:D63, C90:D63
Emergency Control	DALI Monitored (DT1)
DALI Monitored ~ Supports Emergency test and monitoring over DALI (IEC62386) with full compliance to IEC62386-202.	
Emergency Duration	90 mins
Emergency Lumen Output	320 lm
Emergency Mode	Non-Maintained
Emergency Output Power	2200 mW

COMPLIANCE	
Product Design Life	8 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	
Standards	AS/NZS 60598.1 AS 60598.2.22 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15 AS/NZS 2293.3

## WARRANTY

**Commercial Use Warranty** 6 RTB (Total 6 Years)

## DIMENSIONS

**Product Height** 48 mm

**Product Length** 145 mm


**Product Width** 145 mm

## LINE DRAWINGS

EV/LEDFIRE/SM/ADV/IP65

## PHOTOMETRICS

EV/LEDFIRE/SM/ADV/IP65/DA

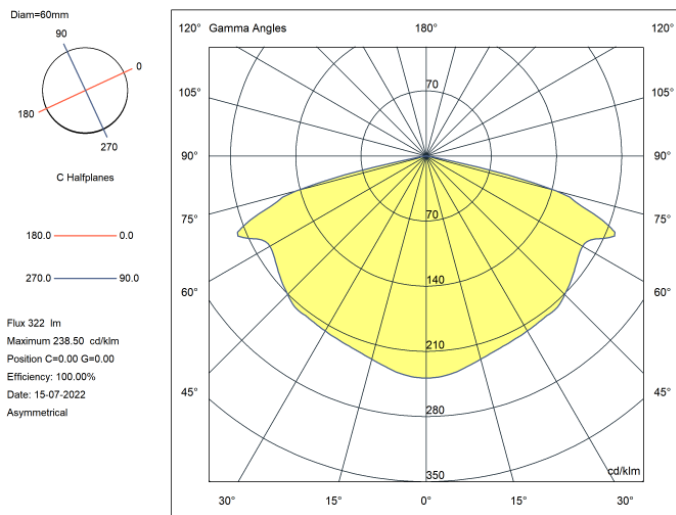

# LED FIRE SM ADV IP65

Advanced Surface Mounted IP65 Emergency Luminaire

## FEATURES

- Non-maintained operation
- Fully compliant (AS/NZS 2293)
- Weatherproof IP65 rating
- Low energy consumption (avg. 0.4W)
- Wall, ceiling and rod mounting (with rod mount kit)
- High quality LiFePO4 battery
- Available in black or white
- Works with Lynk wireless monitoring control systems



ORDERING INFORMATION	
Order code	11550
Description	Ektor Lynk Advanced Ledfire Surface Mount IP65 - D63 - W/Wireless
Driver Type	Wireless (IEC62386-104) with DT1
Item Code	EV-LED FIRE-SM-ADV-IP65-LK

MECHANICAL	
Body Material	Polycarbonate
Fitting Colour	White
Installation Type	Surface mount
IP Rating	IP65

ELECTRICAL	
Electrical Rating	Class II
Input Frequency	50 Hz
Input voltage	230Vac
In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%	
Maximum Wattage	2 W
Standby Power	0.4 W
Standby power for non-maintained/switched maintained emergency devices is measured when the light is off and the charger is in standby mode. For maintained emergency devices, standby power is measured when the light is on and the charger is in standby mode. Typically, charging occurs for the first 16 hours after the device is powered or after a battery discharge.	
Working Temp Range	0 to 40 °C

DRIVER	
Driver Included	Yes
Integrated Driver	Yes
Driver Type	Wireless (IEC62386-104) with DT1
Wiring Type	Re-wireable terminal block (3 pin)

EMERGENCY (EM SUFFIX)	
Replacement Battery Code	18096
Emergency Classification	C0:D63, C90:D63
Emergency Control	IEC62386-104 (Wireless DT1)
IEC62386-104 ~ Supports wireless test and monitoring over IEC62386-104 using IEC62386-202.	
Emergency Duration	90 mins
Emergency Lumen Output	320 lm
Emergency Mode	Non-Maintained
Emergency Output Power	2200 mW

COMPLIANCE	
Product Design Life	8 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	
Standards	AS/NZS 60598.1 AS 60598.2.22 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15

### WARRANTY

**Commercial Use Warranty**                      6 RTB (Total 6 Years)

### DIMENSIONS

**Product Height**                                      48 mm  
**Product Length**                                    145 mm  
**Product Width**                                     145 mm

### LINE DRAWINGS

EV/LED/FIRE/SM/ADV/IP65

### PHOTOMETRICS

EV/LED/FIRE/SM/ADV/IP65/DA

