
ECLISSE CLASSIC LUCE DOUBLE - wiring ready


Double Sliding Pocket Door System Wiring/Socket Ready

FW



DOUBLE POCKET DOORS SYSTEM

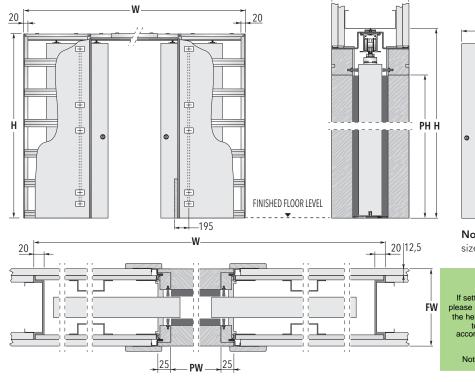



Note: Non standard sizes on request

PLEASE NOTE INBUILT TOLERANCE

If setting out your studwork before delivery of your frame I setting out study out study before before very out your hand please note there is approximately an 8mm tolerance built into the height of these pocket door systems which you will need to take into account. Packers may be required to accommodate for this gap if you are unable to adjust the studwork above the system.

Note: Frame should be installed at finished floor level

FRAMES FOR DOUBLE DOORS			DOOR PANELS UK	
MAX. PASSAGE SIZE PW x PH	OVERALL DIMENSION W x H	FINISHED WALL	DW	DH
1200 x 2030	2520 x 2120	150	626	2040
1400 x 2030	2920 x 2120	150	726	2040
1600 x 2030	3320 x 2120	150	826	2040
1800 x 2030	3720 x 2120	150	926	2040
2000 x 2030	4120 x 2120	150	1026	2040
1170 x 1971	2490 x 2061	150	2ft. 0in. x 6ft. 6in. (610 x 1981 mm)	
1322 x 1971	2842 x 2061	150	2ft. 3in. x 6ft. 6in. (686 x 1981 mm)	
1474 x 1971	3194 x 2061	150	2ft. 6in. x 6ft. 6in. (762 x 1981 mm)	
1626 x 1971	3346 x 2061	150	2ft. 9in. x 6ft. 6in. (838 x 1981 mm)	
1800 x 1971	3720 x 2061	150	3ft. 0in. x 6ft. 6in. (914 x 1981 mm)	
1350 x 1971	2870 x 2061	150	2ft. 4in. x 6ft. 6in. (711 x 1981 mm)	
1550 x 2020	3270 x 2110	150	2ft. 8in. x 6ft. 8in. (813 x 2032 mm)	
1700 x 2020	3620 x 2110	150	2ft. 10in. x 6ft. 8in. (864 x 2032 mm)	

Dimensions are given in mm



NOTES

- Non standard sizes available up to PW 2600 x PH 2600 mm. ►
- Suitable for 35 to 44 mm thick doors. ►
- ► Standard double units have the possibility to use sockets on both sides of one pocket, both pockets on request.
- Maximum socket depth 44 mm.
- Doors, plasterboard and final architrave not supplied.
- When fitting flush pull handles we recommend the stop be regulated so ► the door protrudes from the pocket to avoid risk to fingers.
- Should the door be set to enter the pocket completely we do not accept
- any liability.
- The framework is not designed to take heavy loads such as radiators etc.
- Install at finished floor level.

SLIDING POCKET DOOR SYSTEMS

Max door weight 100 kg (150 kg on request).

Sliding Pocket Door Systems

ECLISSE UK - Richmond House - Occupation Lane - Gonerby Moor - Grantham - Lincs NG32 2BP Tel: 0333 577 0828 - info@eclisse.co.uk - www.eclisse.co.uk

- **Door Furniture** ►
- Flush pulls and bathroom locks
- **ECLISSE BIAS®**
 - Soft close up to 40 kg with anti-slam
- ECLISSE BIAS® DS ► Bi-directional soft close up to 40 kg with anti-slam
- Soft Close
- Slide the door towards the close position, the soft close takes over Double door Co-ordination ►

ACCESSORIES

Doors open and close simultaneously