

## SAFE - T 2 DRONE TETHER

POWERFUL, SECURED & SMART  
TO FLY FOR HOURS

**DRONELINE Enterprise**

[info@droneline.shop](mailto:info@droneline.shop)

[www.droneline.shop](http://www.droneline.shop)

**Technik und Verkauf**

+43 664 4387366

Beratung und Service aus Österreich



Unlimited Secured Power  
Up To 2.8kW



Up to 100 m / 328 ft.  
Swappable Micro-tether



Fiber Optics & BPL  
Dual-comms Option



Live Monitoring with  
the T-Monitor App



Development  
Tool Kit




Ready for Integration  
with Mounting Plates



IP54  
Certified

## TECHNICAL SPECIFICATIONS

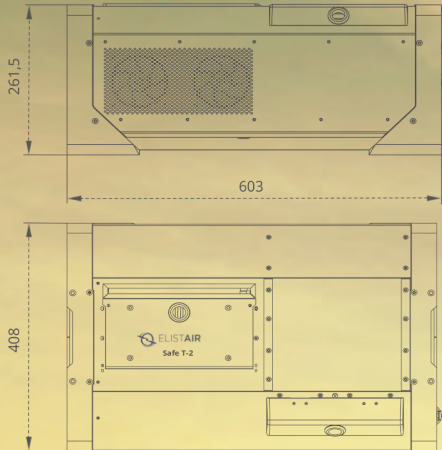

Micro-tether length	Up to 100m - 328 ft.
Micro-tether weight	16g /m. 20g /m. 25 g/m.
Tensile strength	150 daN
Operational Temperature	-10 to 45° C (14° to 113° F)
Max continuous power	2200W cont. / 2800W peak
Micro-tether management	10 presets / Smart pre-programmed laws & reset function
Secured Dual-Comms	BPL & Fiber Optics (optional)
Wi-Fi Connectivity	Frequency 2.4GHz - 2.5GHz (2400MHz - 2483.5MHz) Encryption WEP/TKIP/AES
Power source requirement	200 - 250 VAC, 50 - 60 Hz, 3kW min
Power supply cable	Type E
Built-in protection	Fuse
Ingress protection level	IP54
Vehicle integration kit	Hardware & Software
Dimensions	603 x 408 x 261,5 mm (24" x 16" x 11")
Weight	25 kg (57lbs)



## FULL RANGE OF AIR MODULES



DJI M200 V2



DJI M200 V1



DJI Inspire 2



6S



12S



Now Compatible with  
DJI M300