

AL8C

Passthrough Warewasher c/w Heat Recovery Unit W 905mm x D 760mm x H 2010mm

Washtech warewashers are built to improve the efficiency of operations washing oversized and/or heavily soiled items, from bakeries to production kitchens, supermarkets to hospitals.

The AL8C is a powerful, highly durable, simple-to-use and easy-to-maintain passthrough warewasher. It features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer. Built with a large wash chamber and carefully counterbalanced passthrough door, it is ideal for washing bins, crates, bowls and other oversized items.

The AL8C also features a highly efficient integrated heat recovery unit which ensures minimal steam emissions and reduced energy consumption.

Since 1981 Washtech dishwashers have been constructed from heavy duty stainless steel, and are engineered specifically for the unique local conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech AL8C will not let you down.

Special Features:

- Suitable for installation without an extraction canopy in many situations*
- Integrated heat recovery unit which preheats the cold water supply, significantly reducing steam emissions, energy consumption and water treatment cost

Standard Features:


- Versatile 2.5, 4.5 and 6.5 minute wash cycles
- Large internal wash chamber with useable area of W 700mm x D 540mm x H 650mm
- Low cold water consumption of 2.6 litres per cycle
- Washtech Hybrid Controls
- Easy Installation supplied with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - No commissioning required
- High powered wash system
- Suitable for connection to low inlet water pressure (break tank and rinse pump fitted)
- Heavy-duty stainless steel construction and wash manifold
- Robust stainless steel wash and rinse arms with precision stainless steel jets
- Double heavy duty stainless steel filtration system including dual scrap trays and separate wash inlet filter
- Wash chamber easily accessible via counter-sprung hood
- Easy loading with inline bench work
- Watermark approved backflow prevention
- Comprehensive Moffat 5-2-1 warranty

Includes:

- 1x 500mm x 600mm dish rack (600 70042)
- 1x 500mm x 600mm cup rack (600 70043)
- 1x 435mm cup cover (K0452)
- 1x cutlery basket (C660508)
- 1x cutlery container (C660503)




* Full certificate and conditions from SEED available on request



AL8C

Passthrough Warewasher c/w Heat Recovery Unit
W 905mm x D 760mm x H 2010mm

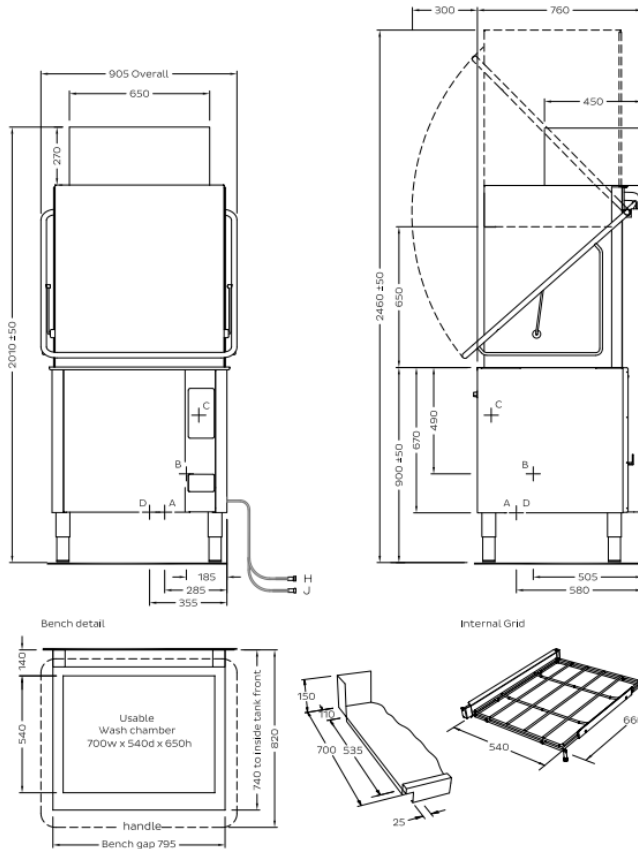

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9158 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
wasales@moffat.com.au



ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Version: 1904

| | | | | | |
|--------------------------------|---------------------|----------------------------|----------------|---------------|-------|
| D Cold water | Temperature | <25°C | | | |
| | Connection | 3/4" male; hose supplied | | | |
| | Pressure | 200-350kPa | | | |
| | Flow | 10 litres per min | | | |
| | Quality | Potable - refer table | | | |
| | Backflow Prevention | Atmospheric Vacuum Breaker | | | |
| | Consumption | 2.6 litres per cycle | | | |
| A Hot water (fill only) | Temperature | 65°C | | | |
| | Connection | 3/4" male; hose supplied | | | |
| | Pressure | 200-350kPa | | | |
| | Flow | 20 litres per min | | | |
| | Quality | Potable - refer table | | | |
| | Backflow Prevention | Atmospheric Vacuum Breaker | | | |
| B Waste | Connection | 1.5" BSP male | | | |
| | Line | 2.0" / 50mm minimum | | | |
| C Electrical | V | Hz | A/phase | max Kw | |
| | 3P + N + E | 415 | 50 | 25 | 18.00 |
| | Option: | | | | |
| | * 3P + N + E | 415 | 50 | 15 | 10.50 |

| | | |
|-------------------|----------------|---------------|
| Dimensions | Machine | Packed |
| Width | 905 | 1000 |
| Depth | 760 | 910 |
| Height | 2010 | 1970 |
| Weight | 180 | 203 |
| Cubicmetres | | 1.80 |

| | | |
|----------------------|------------|------------|
| Water Quality | Min | Max |
| pH | 7 | 8 |
| Hardness ppm | 20 | 100 |
| CL- | | 100 |
| SO ₄ | | 400 |
| Fe | | 0.1 |
| Mn | | 0.5 |
| Cu | | 0.05 |
| CL ₂ | | 0.1 |

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine.
* Connection on lower power rating will reduce the wash and rinse heating, and delay the operation of the machine.

an Ali Group Company



The Spirit of Excellence