

# TYVEK® FLEXWRAP TAPES


Flexible high performance tapes for air and water tight seals around roof, ceiling and wall penetrations



Length: 23 m  
Width: 15 cm



Length: 10 m  
Width: 60 mm

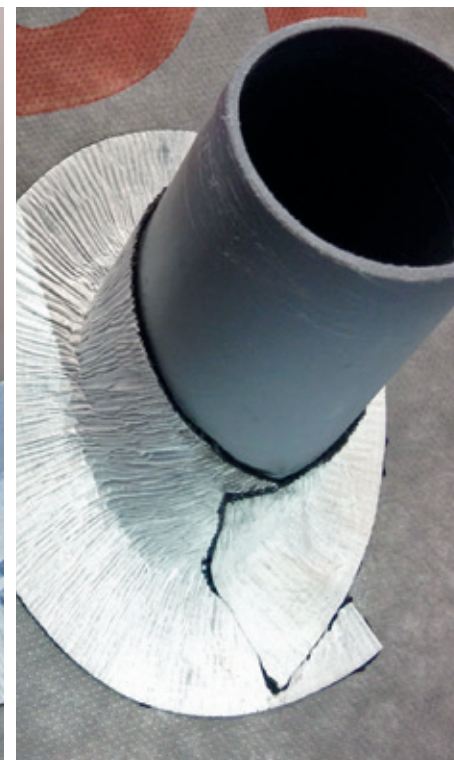

## Applications:

- Building penetrations including roof and window junctions (VCL/frame interface), pipes, vents, cables and other openings to resist air, wind & water ingress
- For use behind a building facade or roof covering and internally

## Benefits:

### Superior protection /air and watertight seals

- Helps seal the building envelope
- Creates more airtight seals compared to standard tapes used on irregular shapes/penetrations

### Easy installation

- Packaged in ready-to-use rolls
- No requirement for additional fixings
- Approx. 50% quicker to fit compared to standard tapes and seals

### Superior durability

- Extendable tape constructed with a durable Tyvek® top-sheet, a premium butyl adhesive layer, and a specially designed split release liner
- Allows for structural movements
- UV resistant


### Excellent adhesion performance

- Ensures continuity, compatibility and integrity with all Tyvek® breather membranes, AirGuard® AVCLs and other membranes at penetrations
- 100% butyl adhesive performs over a wide temperature range
- Compatible with most common building materials



# TYVEK® FLEXWRAP TAPES

## Installation around pipes

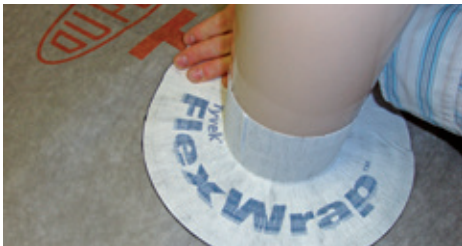

## Installation around windows



## Installation around beams and joists



Technical Data	FlexWrap NF	FlexWrap EZ
Coverage	3.4 m <sup>2</sup>	0.6 m <sup>2</sup>
Colour	white (black adhesive)	white (black adhesive)
Rolls per box	1	3
Temperature resistance	from - 30 °C till + 80 °C (temporary 100 °C)	from - 30 °C till + 80 °C (temporary 100 °C)
Elongation	ca. 160 % (2.6 x of the original length)	ca. 160 % (2.6 x of the original length)
Installation temperature	> 0 °C	> 0 °C
UV resistance	4 months	4 months

## INSTALLATION GUIDELINES

### SURFACE PREPARATION


The surface must be free from dirt, moisture, ice, grease and other materials which could reduce the adhesion. Tyvek® FlexWrap is to be installed when dry and at temperatures above 0 °C. A primer may be used for application temperatures below 0 °C and non-ideal surface conditions.

### INSTALLATION

- Properly position Tyvek® FlexWrap around the surface to seal.
- Minimise wrinkles and bubbles by smoothing the surface and by repositioning as necessary.
- Apply pressure by hand along the entire surface to achieve a good bond to the substrate. (After pressure has been applied repositioning may be difficult.)
- After completion of the installation Tyvek® FlexWrap has to be covered within 4 months with the appropriate building materials.

Watch the installation video for more details  
[goo.gl/dZGcqa](http://goo.gl/dZGcqa)

## Installation around pipes (EZ)

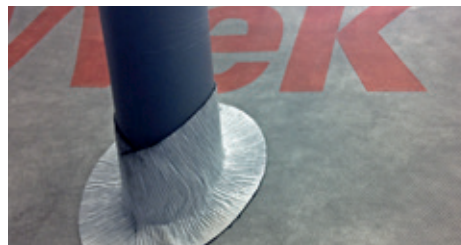

DuPont Protection Solutions  
BBSP1  
Bristol & Bath Science Park  
Dirac Crescent  
Emersons Green  
Bristol  
BS16 7FR  
Telephone: 08444 068 722  
[www.construction.tyvek.co.uk](http://www.construction.tyvek.co.uk)



FOR  
GREATER  
GOOD™