

PRODUCT INFORMATION PACKET

FASCO®

Model No: D1165
Catalog No: D1165
1/20 HP OEM Replacement Motor, 1550 RPM, 115 Volts, 3.3" Diameter, OAO
HVAC/R OEM Replacement Motors



Regal and Fasco are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL



Nameplate Specifications


Output HP	1/20 Hp	Output KW	0.04 kW
Frequency	60 Hz	Voltage	115 V
Current	1.90 A	Speed	1550 rpm
Service Factor	1	Phase	1
Duty	Air Over	Insulation Class	B
Frame	3.3	Enclosure	Totally Enclosed
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		

Technical Specifications

Electrical Type	Shaded Pole	Starting Method	Across The Line
Poles	4	Rotation	Clockwise Lead End
Mounting	Extended Studs	Drive End Bearing	Sleeve
Opp Drive End Bearing	Sleeve	Frame Material	Steel
Shaft Type	Flat	Overall Length	10.22 in
Frame Length	2.74 in	Shaft Diameter	0.313 in
Shaft Extension	3.5 in		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:29/10/2019

07	REVISED TO NEW N/P FORMAT	02/12/2008	08	PICTORIALLY REMOVED BARCODE FROM N/P LABEL	SD 2-11-10	09	REVISED PACKING QUANTITIES	4005138 SD 4/2/2012	STANDARD TOLERANCES: ANGULAR +/- 1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005
----	---------------------------	------------	----	--------------------------------------------	------------	----	----------------------------	------------------------	-----------------------------------------------------------------------------------------------

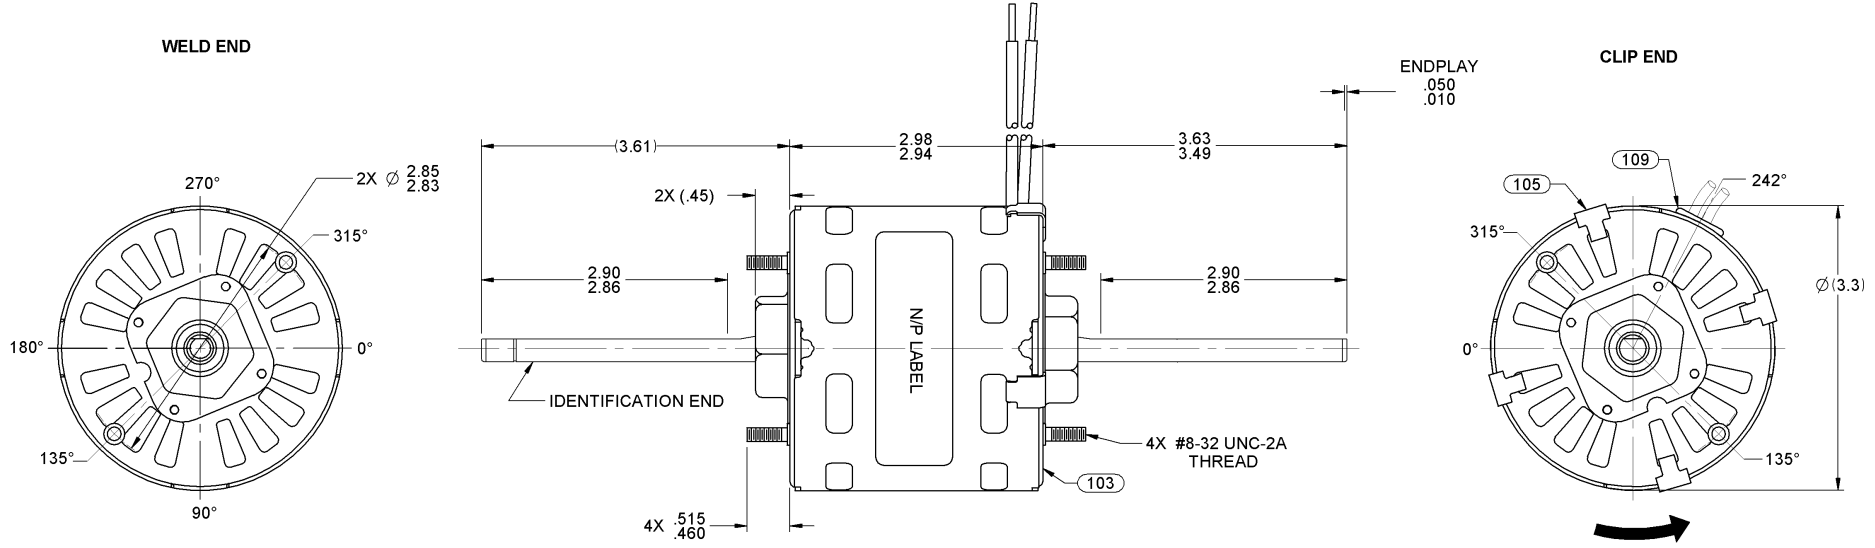

LEAD MATERIAL
18 GA. 125°C 2/64 INS.
X-LINK POLY., BLACK
20.00/18.00 IN. LONG
.56/.44 IN. STRIP

0046-4072

0046-4282

FASCO Fasco Industries, Inc. Motor Division

Assembled in Mexico

No. 71639477 TYPE U63B1 T.P. AO

115 V 60 Hz Class B

1.9 A 1550 RPM 1/20 HP

Model D1165 Max Amb: 40°C

LR6319

SAFETY WARNING

This Motor Must Be Grounded in Accordance With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock

61299553

NOTES:
PACK 126 MAXIMUM MOTORS PER PALLET.
NO PACKAGING TAPE OVER CARTON LABEL.

FRONT SHAFT POSITION		* TYPICAL PERFORMANCE AT 115 VOLTS 60 Hz.										CUSTOMER: FASCO DIST.		FASCO FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION										
HORIZONTAL	UP DOWN	MOTOR SPEED	IDLE			LOADED			LOCKED			BREAK	PART NUMBER: D1165		CONFIDENTIAL; DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.									
			R.P.M.	AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.	APPLICATION: COUNTER SALES		MOTOR TYPE			DRAWING NUMBER					
CUSTOMER APPROVAL:			1765	1.61	89	37.8	1550	1.89	142	14.2	2.62	192	41.2	MOTOR WEIGHT: 2.38 POUNDS		SHADED POLE			7163 9477					
SIGNED:														ENVIRONMENT: DRY		FINISH COLOR: BLACK			REV. 09					
DATE:														DRAWN BY: S. M. MAGGARD		B	LA	FR	A	S	C	E	B	A
														DATE DRAWN: 3-25-2002		00	63	30	V	05	FF	5	3	0

If Printed, this is an Uncontrolled Document.