

PRODUCT INFORMATION PACKET

FASCO®

Model No: D126
Catalog No: D126
1/40 HP Fan & Blower Motor, 1500 RPM, 115 Volts, 3.3" Diameter, Semi Enclosed
Self Cooled Motors



Regal and Fasco are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL



Nameplate Specifications


Output HP	1/40 Hp	Output KW	0.02 kW
Frequency	60 Hz	Voltage	115 V
Current	1.10 A	Speed	1500 rpm
Service Factor	1	Phase	1
Duty	Air Over	Insulation Class	B
Frame	3.3	Enclosure	Open Air Over
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		

Technical Specifications



Electrical Type	Shaded Pole	Starting Method	Across The Line
Poles	4	Rotation	Clockwise Shaft End
Mounting	Extended Studs	Drive End Bearing	Sleeve
Opp Drive End Bearing	Sleeve	Frame Material	Steel
Shaft Type	Flat	Overall Length	5.08 in
Frame Length	2.24 in	Shaft Diameter	0.313 in
Shaft Extension	2.30 in		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:29/10/2019

51	REMOVE BARCODE AND UPDATE NAEMPLATE	KSA 11/03/09	52	ADDED DIMENSION FOR SHAFT FLAT LENGTH	SD 11-20-09	53	ADDED CARTON LABEL NOTES	4002812 MLM 8/1/11	STANDARD TOLERANCES: ANGULAR +/- 1 DEGREE 2 PLACE DECIMAL +/- .01 3 PLACE DECIMAL +/- .005
----	-------------------------------------	--------------	----	---------------------------------------	-------------	----	--------------------------	-----------------------	---

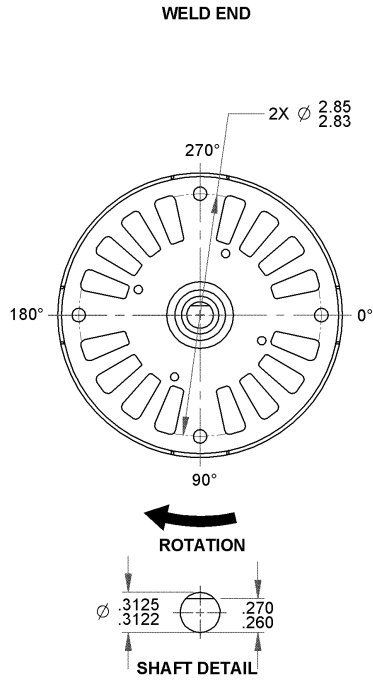

LEAD MATERIAL
18 GA. 125° 2/64 INSUL.
X-LINKED POLY (2) BLACK
14.00/12.00 IN. LONG
.68/.56 IN. STRIP

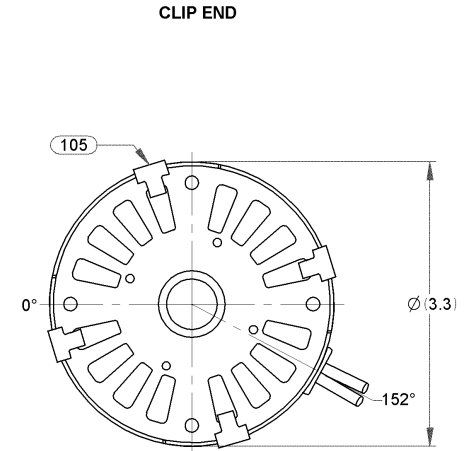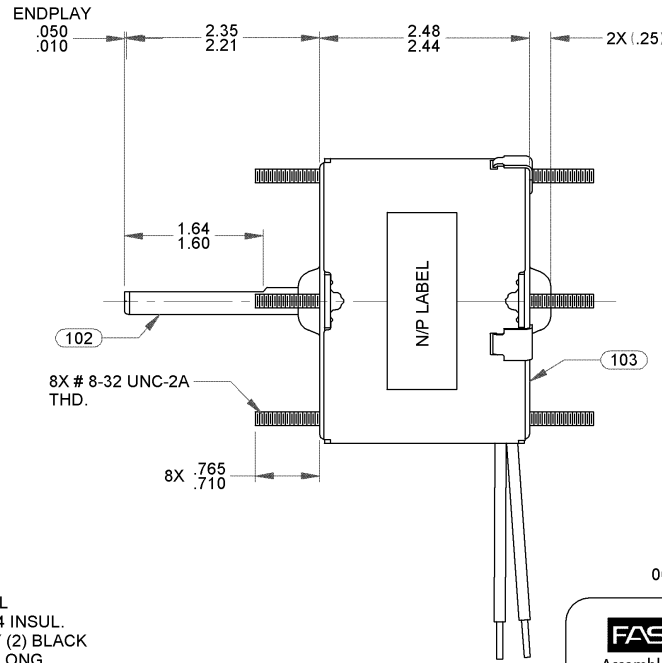

NOTES:
1. NO PACKAGING TAPE OVER CARTON LABEL.

0046-4072

0046-4282

FASCO Fasco Industries, Inc.
Motor Division

Assembled in Mexico
No. 71631640 TYPE U63B1 T.P. AO LR6319
115 V 60Hz Class B
1.1 A 1500 RPM 1/40 HP
Model D126

SAFETY WARNING

This Motor Must Be Grounded in Accordance With Local Or National Electrical Codes To Prevent Possible Injury Due To Electrical Shock

61299553

FRONT SHAFT POSITION		TYPICAL PERFORMANCE AT 115 VOLTS 60 Hz.											CUSTOMER: FASCO DIST.		FASCO FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION									
HORIZONTAL	MOTOR SPEED	IDLE			LOADED			LOCKED			BREAK	PART NUMBER:	CONFIDENTIAL; DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.											
		R.P.M.	AMP.	WATT	IN.OZ.	R.P.M.	AMP.	WATT	IN.OZ.	AMP.	WATT	IN.OZ.	APPLICATION:	MOTOR TYPE	DRAWING NUMBER									
		1727	.92	55	17.0	1550	1.00	71	7.6	1.47	109	18.4	MOTOR WEIGHT:	2.17 LBS	SHADED POLE	7163 1640								
													ENVIRONMENT:	DRY										
													FINISH COLOR:	BLACK										
													DRAWN BY:	M. MASON	B	LA	FR	A	S	C	E	B	A	REV.
													DATE DRAWN:	11/9/06	00	63	30	V	03	FE	5	3	0	53