

3590EGT3GD

3590EGT 3GD "TOUCH" : TOUCH SCREEN INDICATOR FOR ATEX 2 & 22 ZONES



Weight indicator with a big touch screen display, for ATEX 2 & 22 areas classified at risk of explosion. Protection methods according to
ATEX II 3G Ex nR IIB T6 Gc X for gases
ATEX II 3D Ex tc IIIC T135°C Dc IP68 X for dust.
Suitable for advanced industrial applications, it's fitted with 3 serial ports, configurable printouts and integrated alibi memory. CE-M approvable (OIML R-76 / EN 45501).

The best solution
for advanced industrial
applications

MAIN FEATURES

- 5,7" colour touch screen display
- Multilanguage software
- 15-key alphanumerical waterproof keyboard
- 3-way control light
- Selectable QWERTY, AZERTY o QWERTZ keyboard integrated in the touch screen
- Stainless steel waterproof enclosure, with new I P 6 8 protection system
- Dimensions: 280x143x185mm
- Suitable for use on the table, column or wall
- Real time clock and permanent data storage
- Fitted alibi memory, integrated on the motherboard
- Slot for built-in micro SD for recording the configuration, logos, and customized screens (upon request)
- Functions available with DINI TOOLS utility
 - Configuration, data entry and print formatting
 - Recording and filing of all the information on PC
 - Complete retrieval of the configuration
 - Instrument calibration with numeric values
 - Customization of the screens
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. and up to 8 signal linearisation points
- 4 independent analogue channels for reading of the weight
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm)
- Up to 10.000e OIML or 3 x 3000e @ 0,3 μ V/d CE-M legal for trade
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points
- Connectable to printers and labellers with free programming of the printout formats
- Power supply from 110-240Vac line or external rechargeable battery (recharge in safety zone).

MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76
- OIML R51 - MID
- OIML R134 (AF09)

I/O SECTION

- Two RS232 serial ports, for connection to printer, radio module, PC or PLC, badge reader or remote scale.
- One RS485/RS232 serial port, for connection to printer, PC, PLC, or digital load cells.
- 4 optoisolated outputs, up to 16 with optional board.
- 2 optoisolated inputs, up to 8 with optional board.
- Profibus interface to install in safety zone.
- Analog output DAC16O needs the expansion board IOEXPB and it's only compatible to a bench mounting.

Text (LOT)

|

Esc	`	<	/]	Clear	BkSp			
1	2	3	4	5	6	7	8	9	0
Q	W	E	R	T	Y	U	I	O	P
A	S	D	F	G	H	J	K	L	;
⌘	Z	X	C	V	B	N	M	,	.
Shift	←					→	OK		

QWERTY keyboard integrated into the Touch Screen display.



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI AR GEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI AR GEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI AR GEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI AR GEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI AR GEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

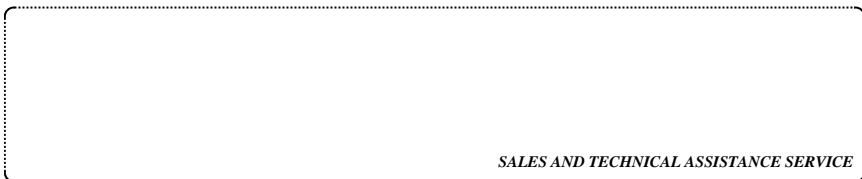

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.