

## DGT1

"DGT1": MULTIFUNCTION, DIGITAL WEIGHT TRANSMITTER / INDICATOR



Compact, multifunction weight transmitter / indicator, for panel mounting on DIN bar. It allows the direct reading and diagnostics of the connected weighing system. The wide range of available interfaces, makes it easy to integrate the weighing with any automation system. CE-M approvable (OIML R-76 / EN 45501).

The best solution  
for advanced industrial  
applications

## MAIN FEATURES

- Easy to use 5-key waterproof keyboard.
- Highly efficient red LED display with 6 8-mm digits and 6 LEDs for showing active functions.
- Standard dimensions for mounting on DIN bar.
- Calibration, Set-Up parameters, configurable from keyboard or from PC with DINI TOOLS.
- Up to 10.000e or multirange 2 x 3000e @ 0,3  $\mu$ V/d in CE-M approved version for legal for trade use.
- Up to 800.000 displayable divisions with internal resolution up to 3.000.000 points.
- Up to 8 signal linearization points with DINITOOLS (3 from keypad).
- 1 channel A/D 24-bit sigma-delta conversion, up to 3200 conv./sec. autoselect.
- Connectable with up to 16 analogue load cells with 350 Ohm input resistance.
- From 12 Vdc to 24 Vdc power supply.
- Fitted with real time clock and Alibi memory.

## MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76
- OIML R61 - MID

## TRANSMITTER / INDICATOR: FUNCTIONS

- **KEYBOARD:**  
Zeroing; Semi automatic and presettable tare, print and/or data transmission; ON/Stand-by.
- **SELECTABLE:**  
High Resolution Weighing x 10; Net/Gross or lb/kg conversion; Weighs totalisation; Formulation; Approved transmission of the weight to PC/PLC; Counting; In/Out Truck weighing; Hold e Peak.
- **SERIAL PORTS:**  
  
On all models: Reading of the net, gross, and tare weights; Clearing; Semi automatic and presettable tare; Scale switch; Setting of outputs activation thresholds; Reading/Writing of Alibi Memory.  
  
DGT1 and DGT1AN models: Reading of microvolts or ADC converter for all the channels; Message display; Printing; Setting of APW in counting mode; Simulation of key pressure; MODBUS serial protocol.
- **16 bit ANALOGUE OUTPUT on DGT1AN:**  
Analogue output proportional to the net or gross weight, either positive (in loading) or negative (in unloading).

## MASTER/REPEATER OPTION (MSTSLV code)

- Specific programme for use of the indicator as a universal weight repeater or as a multi-scale repeater (MASTER) in combination with DFW/DGT/MCW.


### FUNCTIONING MODES:

- Multi-scale repeater (MASTER)  
function which allows to repeat up to 32 independent scales, with the possibility of managing their functions, or displaying and printing the sum of the weights of all the scales.
- UNIVERSAL weight repeater  
function which allows to repeat the weight of any scales, through the configuration of the input string.
- [Click to learn more.](#)

## I/O SECTION

- RS232/C bidirectional port configurable for connection with external units.
- RS485 bidirectional port configurable for network connection.
- 16-bit analogue output (DGT1AN model) 4-20mA / 0-5Vdc / 0-10Vdc at choice. Maximum load applicable on the output current: 3500hm. Minimum load applicable on the output voltage: 10kOhm.
- 2 photomofset outputs: 150 mA 48 Vac / 150 mA 60 Vdc (NO), with configurable functions (DGT1IO model).
- 2 optoisolator photocoupler inputs: 12÷24 Vdc, 5 mA min - 20 mA max, with configurable functions (DGT1IO model).

## DETAIL 1

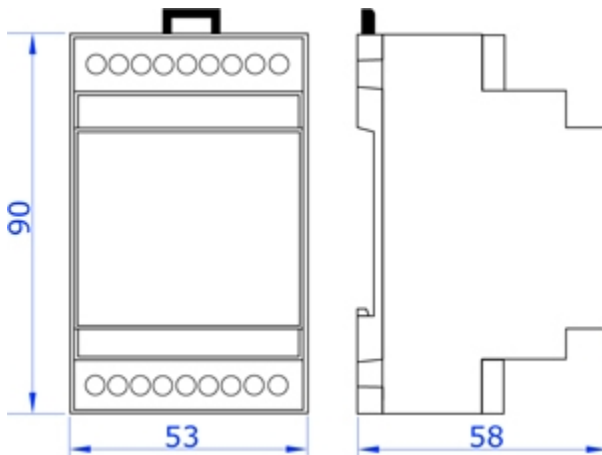

DGT1: dimensions in mm

## DETAIL 2



DGT1 with DR1512 optional power supply, for DIN bar

## DETAIL 3



DGT1: installation example in BOX2121S wall box with PROF1232 profibus module and built-in power supplier.



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

**DINI ARGEO**  
**FRANCE** sarl  
Nogent-sur-Marne  
info.fr@diniargeo.com

**DINI ARGEO**  
**GMBH**  
Sinsheim - Germany  
info.de@diniargeo.com

**DINI ARGEO**  
**UK Ltd**  
Taunton - United Kingdom  
info.uk@diniargeo.com

**DINI ARGEO WEIGHING**  
**INSTRUMENTS Ltd**  
Shanghai - China  
info.cn@diniargeo.com

**DINI ARGEO**  
**WEIGHBRIDGES**  
Calto (RO) – Italy  
info@diniargeo.com



**HEAD OFFICE**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 843418 Fax. +39.0536 843521  
info@diniargeo.com

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 921784 Fax. +39.0536 926654  
service@diniargeo.com

SALES AND TECHNICAL ASSISTANCE SERVICE