

Pool Range CE-PH24-3PH

Features:

- Grey ABS casing
- Toshiba Scroll Compressor
- Built-in Intelligent WIFI controller
- Cascade any number of units
- Heating & cooling functions
- Intelligent defrosting
- Precision electronic expansion valve
- High efficiency titanium pool heat exchanger
- Refrigerant diagnostic gauge
- Working range +43 to -15
- Suitable for Pools, Spa's, Hot Tubs & Ponds
- 3 Year Warranty*


COP's up to 6.62



Specifications:

Model	CE-PH24-3PH
ERP Rating	A+++
Rated Capacity @28°C Water/ 20°C Ambient	24.02kW
Rated Capacity @28°C Water/ 7°C Ambient	17.19kW
Rated Capacity @7°C Water/ 25°C Ambient	12.38kW
Rated Power Input	6.9A
Max Power Input	15A
Sound Pressure	≤ 38dB(A)
Power Supply	380-415/50/3

Outer Water Temperature	15°C-40°C
Protection Class	IPX4
An-electric Shock Class	Class 1
Refrigerant/Charge	R32/2400g
Minimum Water Flow Required	12.9m3/h
Pool Volume (Seasonal / All Year)	90m3 / 65m3
Water Connections	50mm PVC
Climate Type	-15°C~43°C
Product Dimension L x W x H	792 x 745 x 954mm
Net Weight	120kg

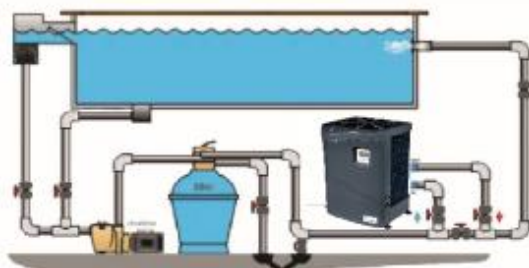

Intelligent touch screen
WIFI controller

Specifications subject to change without warning.

