



Defiant shown in Classic Black with optional warming shelves and mitten racks

Defiant

The Defiant provides more than heat: it's a skillfully crafted, timeless piece of American history. In fact, the last original Defiant Parlor Stove is located in the Smithsonian's National History collection. Named over 40 years ago to "defy the wintery blast," today's Defiant does that and more.



Timeless cast iron styling with a furniture-quality finish



Convenient top load keeps smoke and ash contained and increases load capacity



Exclusive swing-out ash pan allows you to cleanly remove ashes, even when the stove is hot



Cast iron griddle top offers a versatile cooking surface for the stovetop chef

Peak BTU/hr Output ¹	56,000
Heating Capacity ²	1,300 - 2,800 sq ft
Maximum Burn Time	14 hrs
Efficiency ³	84% LHV; 78% HHV
Emissions	1.3 g/hr
Firebox Capacity	3.25 cu ft
Recommended Log Length	20"
Actual Weight	475 lbs

STOVE FINISHES



CLASSIC
BLACK

BORDEAUX
ENAMEL


MAJOLICA BROWN
ENAMEL

TWILIGHT
ENAMEL

**Up to \$2,000 annually for qualifying purchase.


EPA and Tax Credit Certified save money and be kind to the environment with industry leading technology and high efficiency

Specifications

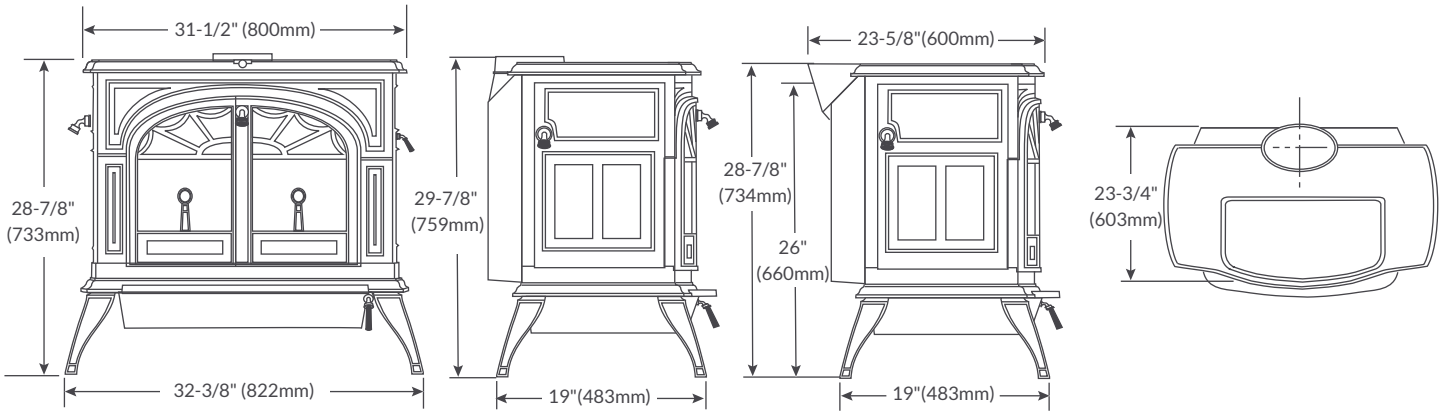

6" or 8" single or double wall pipe	CLEARANCES TO COMBUSTIBLES			
	A	B	C	D
Top exit, single wall connector pipe	21" (521 mm)	15" (381 mm)	21" (521 mm)	5" (127 mm)
Top exit, double wall connector pipe	21" (521 mm)	15" (381 mm)	21" (521 mm)	5" (127 mm)
Rear exit	21" (521 mm)	10" (254 mm)	16" (407 mm)	N/A

Standard floor protection: 44" x 46" minimum. See manual for corner floor protection sizes and diagrams, for single and double wall pipe. Refer to manual for complete list of clearances prior to installation. Oval to round adaptor required for installation.

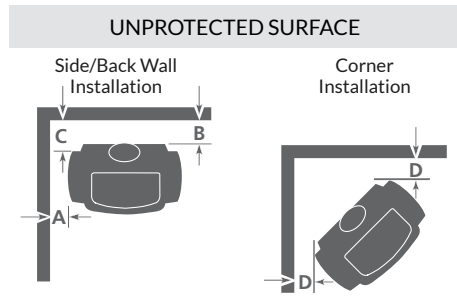

Options & Accessories



CAST IRON STEAMER



CAST IRON TRIVET



VERMONT CASTINGS LEATHER GLOVES



CAST IRON WOOD BIN



PORTABLE SAFETY SCREEN



MAGNETIC STOVE TOP THERMOMETER



MATCHING ENAMEL PIPE



WARMING SHELVES



TRANSITION STYLE DOORS



OUTSIDE AIR ADAPTER



VARIABLE SPEED FAN KIT

Scan to learn more about our wood stoves



For full warranty details, visit www.forgenflame.com.

1: BTU/hr output: 1st hour output uses high burn efficiency number. BTU/hr output will vary depending on the type of fuel used and moisture content of the fuel. 2: See your local Vermont Castings authorized dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. 3: Weighted average LHV (Low Heating Value) efficiency. HHV (High Heat Value) efficiency used to qualify products for Tax Credit beginning in 2023.

IMPORTANT - READ BEFORE YOU INSTALL! Refer to the Owner/Installation Manual for complete clearance requirements and specifications. The images and descriptions in this brochure are provided to assist you in product selection only. Vermont Castings is a registered trademark of Hearth & Home Technologies. Product specifications and pricing subject to change without notice. Fireplace, stove and insert surfaces get extremely HOT and can cause burns if touched. Keep a safe distance away. To learn more visit www.forgenflame.com/pages/fireplace-safety.



FORGENFLAME.COM