



# Infiniti FX35/FX45 2003-2006

PART NUMBER: IF-71-03-G3



**PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit VSM G3**

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.


**When properly installed, the metal between the ball and 2 small holes is all that is exposed.  
(Some exceptions apply).**

**TOOLS REQUIRED:** #2 Phillips screwdriver, Dash Trim Removal Tool (DM-40-22), 5/64" drill bit and drill


**PARTS INCLUDED:** Pro.Fit VSM G3, two # 8 x 1/2" screws

**LOCATION:** Right of air vent

**STEP 1.** Insert the dash trim removal tool behind the trim bezel, right of the radio. (Photo # 1). Pry outward to release a retainer clip. Work the removal tool counter-clockwise around the bezel until all clips are released. (Note: The door covering the cassette player, below the climate control is part of the radio / air vent bezel and will come out with the radio unit.)

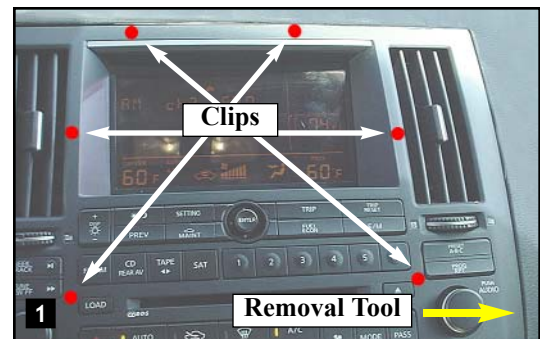

**STEP 2.** Slide the radio unit out of the dash and let hang down, resting on a support placed below it. It is very important that you **do not** let the radio hang freely and that you **do not** disconnect any wiring. The flat ribbon cable that is exposed is very fragile and expensive to replace.

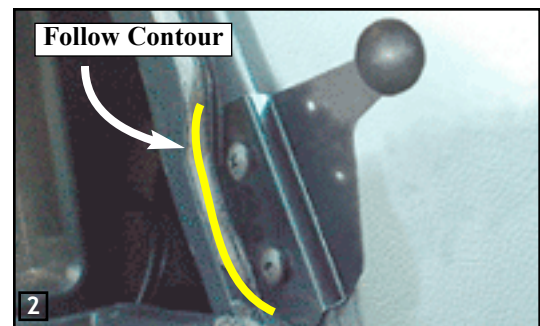


**STEP 3.** Place the Pro.Fit VSM G3 against the dash pad, right of the right air vent. (Photo # 2). The bottom of the G3 will follow the contour of the dash when aligned properly. Using the G3 as a guide, mark the location of two (2) screw holes. Set G3 aside. Drill two (2) pilot holes at the marked location using a 5/64" drill bit and drill. Align the VSM G3 over the pilot holes, insert two (2) # 8 x 1/2" screws and tighten.



**STEP 4.** Re-assemble the dash in reverse order. This completes the installation of your Pro.Fit VSM G3.

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM G3™. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651.688.3588 or 800.388.0073 Fx: 651.688.9876



© Pro.Fit International, Eagan, MN 2008

View Instruction & Updates  
Online at  
[www.pro-fit-intl.com](http://www.pro-fit-intl.com)