



Hybrid 420

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
HYH-42x45	HYN-42x45	420 x 450 mm	3	28 Watts
HYH-42x60	HYN-42x60	420 x 600 mm	3	38 Watts
HYH-42x75	HYN-42x75	420 x 750 mm	3	48 Watts
HYH-42x90	HYN-42x90	420 x 900 mm	3	58 Watts
HYH-42x105	HYN-42x105	420 x 1050 mm	3	68 Watts

NOTES

- This is a Low Voltage product
- Transformer required - TRTR220-24V (Sold separately)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm² - Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)
- Plug-In version not available

STANDARD FINISHES

Mirror Polished Stainless Steel RRP	Brushed Stainless Steel +20% (Stocked)	Matt Black/White Painted +40% (Stocked)	Gunmetal PVD +50% (Stocked)	Brushed Gold PVD +60% (Stocked)
--	---	--	--	--

SPECIFICATIONS

Voltage
24 Volts

Material
Stainless Steel 304

Finish
Mirror Polished

Ingress Protection
IPX5 (Suitable for wet areas)

Standards
AS/NZ 60335.2.43

Electrical Connection
Concealed Wiring only - any leg (Transformer required)

Heating Method
Dry Internal Heating Element

Non-Heated version available

MADE IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



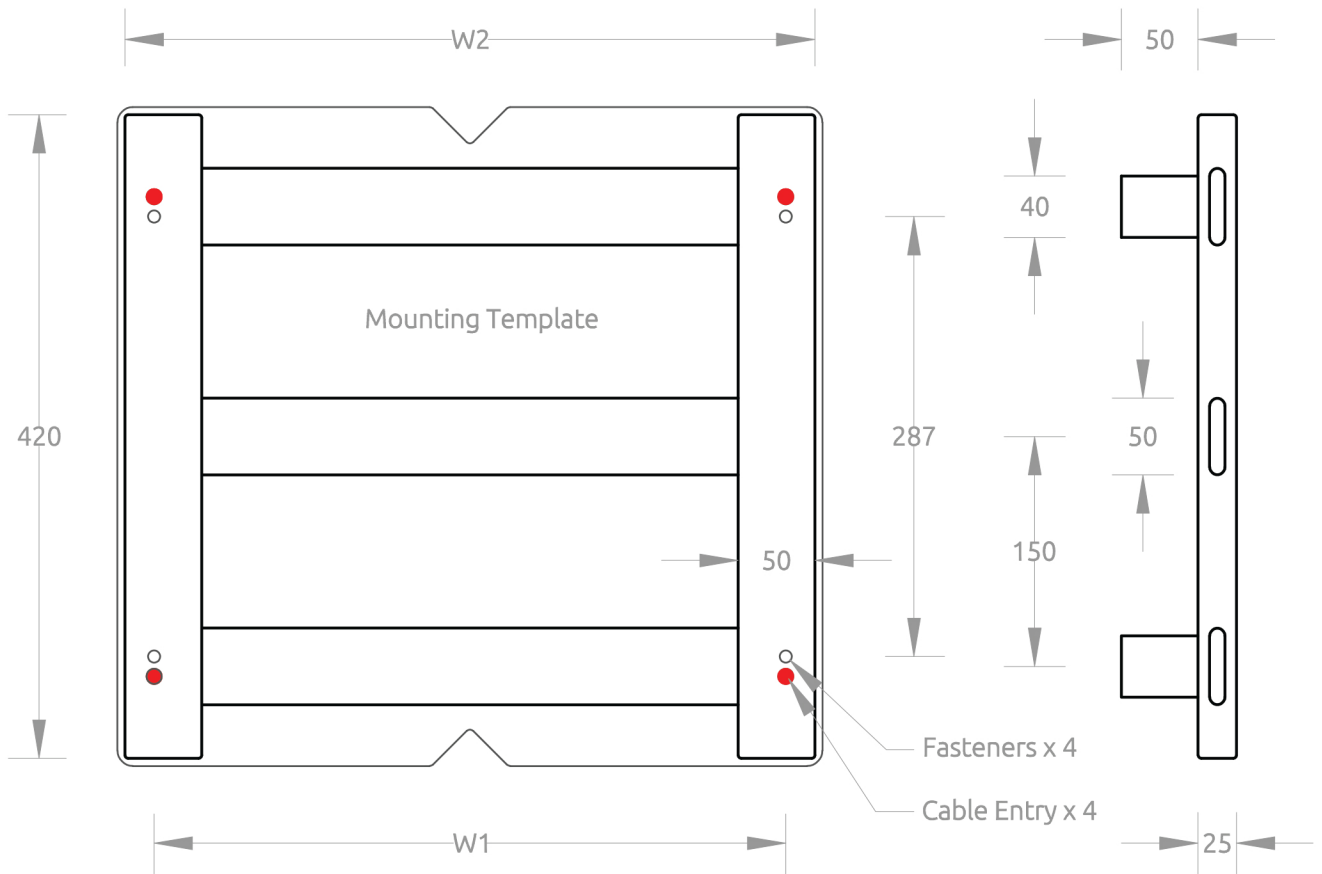

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
HYH-42x45	HYN-42x45	412mm	450mm
HYH-42x60	HYN-42x60	562mm	600mm
HYH-42x75	HYN-42x75	712mm	750mm
HYH-42x90	HYN-42x90	862mm	900mm
HYH-42x105	HYN-42x105	1012mm	1050mm