

SPG405M

Family	Professional dishwasher
Subfamily	Undercounter Glasswasher
Basket dimensions	400x400 mm
Power connection	230 V~ / 14 A / 3,1 kW /50 Hz
Width	440 mm
Depth	555 mm
Height	695 mm
Depth with open door	882 mm
Usable load height	300 mm



Target

Solutions	Coffee shops/Wine bars
-----------	------------------------

Aesthetics

Serie	Ecoline	Control panel	electronic
-------	---------	---------------	------------

Functions



Functionality	Triple filter; HTR; Door clearance 300mm
---------------	--

Programs

Programs

Boiler 85°C/Tank 60°C - 1'30"	Boiler 85°C/Tank 60°C - 2'30"	Boiler 85°C/Tank 60°C - 4'
Drain and self cleaning cycle	Yes	
Maximum basket/hour	40	

Interface

Panel	Ecoline	On/Off button	Yes
Number of buttons	5		

Manual diagnostic Yes

Construction

Tank	With printed base	Door gasket	Only up
Tank construction	Single wall	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Tank capacity	8 l
Back panel	Galvanized	Boiler capacity	4 l
Door	Double wall	Protection class	IPX4
Tank filter	Plastic	Net weight	41.000 kg
Washing spray arm	2 in stainless steel	Adjustable feet	25 mm
Rinse spray arm	Bottom plastic and st/steel upper	Drain max. height	600 mm

Consumption and connections

Tank heating element	1400 W	Warm water connection	Warm 50°C
Boiler heating element	2700 W	Max temperature inlet water	60°C
Washing pump	290 W	Max water hardness	12°fH - 7°dH
Default connection	3000 W	Inlet pressure	100-600 kPa
Water cycle consumption	2,3 l		

Electrical Connection

Plug (F;E) Schuko

Manuals and Certifications

Certificate CE

Equipments

Peristaltic detergent doser	Electronic control	Default chemicals dosing unit of measure	gr/lit
Detergent (red) hose length	2,2m	Drain pump with 3 stage filter system	Yes
Peristaltic rinse-aid doser	Electronic control	Rinse pump H.T.R. system	Yes
Detergent load	1,5 l/h	Break tank	Yes
Rinse aid (blue) hose length	2,2m	Partial renewal of water in the tank and built-in drain pump	Yes
Rinse load	0,4 l/h	Water supply pipe diameter	DN15 - ½"
Soft Start	Yes	Drain supply pipe diameter	DN20-G 3/4"
Boiler thermostop	Yes default ON	Automatic start	Yes, default OFF
Cycle counter	Yes		


Accessories Included

Cutlery basket
Flat basket

1x PHOOS01
2x PB40G01

Water supply hose
Drain hose

Yes - 1,5m
Yes - 2m

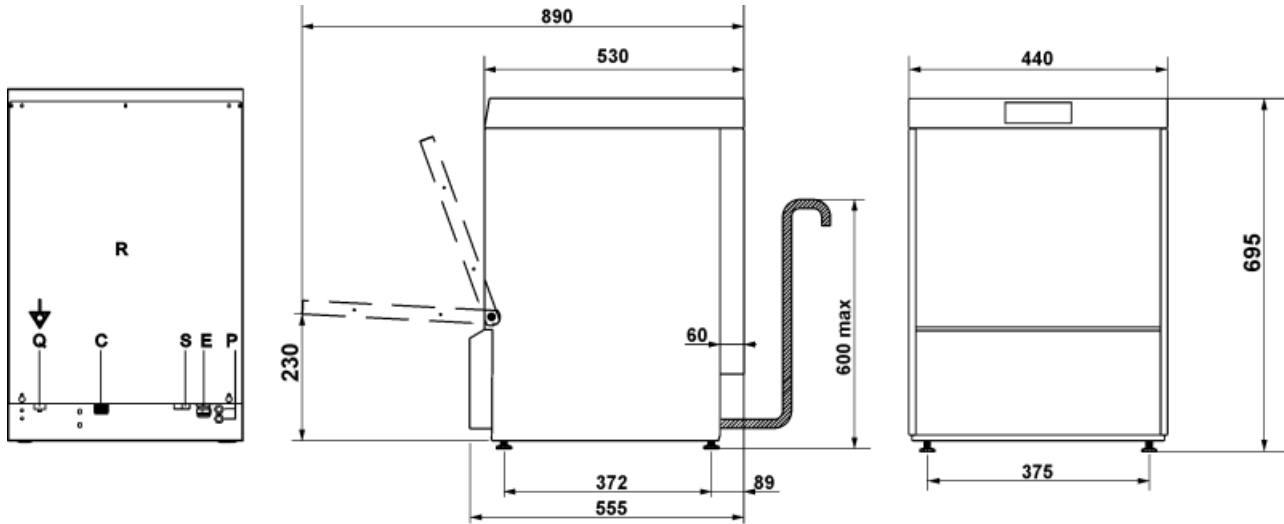

R	Pannello retro	Lower back panel
Q	Morsetto equipotenziale	Earth terminal
C	Tubo di carico	Filler hose
S	Tubo di scarico	Drain hose
P	Tubi pompe peristaltiche	Peristaltic hoses
E	Cavo alimentazione elettrica	Electricity supply cable

Not included accessories



RB40G01

Universal wire basket with flat bottom,
Ø 400 mm, h 140 mm



WH00C01

Wire insert for cups



PHOOS01

Polypropylene single basket for cutlery



WB40G02

Sloped bottom 4 compartments wire
basket for max 90 mm diameter glasses,
400x400x168 mm

WB40PG4

Wire basket for plastic glasses with flat
bottom, 400X400X210 mm

WB40G03

Sloped bottom 3 compartments wire
basket for max 120 mm diameter
glasses, 400x400x168 mm



PHOOS02

6 compartments polypropylene basket
for cutlery




RB40A3

Adapter for round basket for single
wall models and 460 mm
glasswashers



WH00S01

Wire insert for 12 small dishes



WB40G01

Universal wire basket with flat
bottom, 400x400x120 mm

KITRB40G01

Kit of 2 wire round baskets and
adaptor for Ecoline



WS4

Underframe for glasswasher 400,
495x530x490 mm



WB40D01

Wire basket for 8 dishes max
diameter 315 mm, 400x400 mm

Symbols glossary (TT)



HTR RINSING SYSTEM



PARTIAL DRAIN SYSTEM+



MAX. LOAD HEIGHT 300mm