

## Specifications


<b>SoC</b>	DM&P SoC CPU Vortex86SX- 300MHz Real Time Clock with Lithium Battery Backup
<b>Cache</b>	L1:16K I-Cache, 16K D-Cache
<b>Bus</b>	16-bit x-ISA interface
<b>BIOS</b>	AMI BIOS
<b>System Memory</b>	128/256MB DDR2 Onboard
<b>Watchdog Timer 0 &amp; 1 Sets</b>	Software programmable from 30.5 $\mu$ sec. to 512 sec. x 2 sets (Watchdog 1 fully compatible with M6117D)
<b>Flash Disk Support</b>	Onboard 2MB SPI Flash Disk MSTI EmbedDisk Module (16MB and above)
<b>SRAM support</b>	512KB (Optional)
<b>I/O Interface</b>	Enhanced IDE port x1 RS-232 port x1 RS-232/422/485 port x1 USB port (Ver2.0) x2 Parallel port x1 16-bit GPIO port x2
<b>Connectors</b>	2.0mm 44-pin box header for IDE x1 2.0mm 26-pin box header for Printer x1 2.0mm 20-pin box header for 16-bit GPIO x2 2.0mm 10-pin box header for RS-232 x2 2.0mm 10-pin box header for USB x1 2.54mm 5-pin box header for Keyboard x1 2.54mm 5-pin box header for Mouse x1 2.54mm 3-pin header for RS-485 x1 1.25mm 6-pin wafer for JTAG x1
<b>Power Requirement</b>	Single Voltage +5V @ 300mA
<b>Weight</b>	56g
<b>Board Size</b>	100 x 66mm (3.94 x 2.6 inches)
<b>Operating Temperature</b>	-20°C ~ +70°C -40°C ~ +85°C (Optional)

## Packing List

- VSX-6116-V2 x1
- CD for User's Manual & Driver x1
- Cable
  - HDD 44P (2.0) x1
  - PRINT (2.0) x1
  - RS-232 (2.0) x2
  - USB (2.0) x1
  - GPIO (2.0) x2
  - PS2 KB White x1

## Ordering information

- VSX-6116-V2** Vortex86SX Tiny CPU Module with 128MB DDR2
- ICOP-2720** Tiny VGA/LCD Development Kit

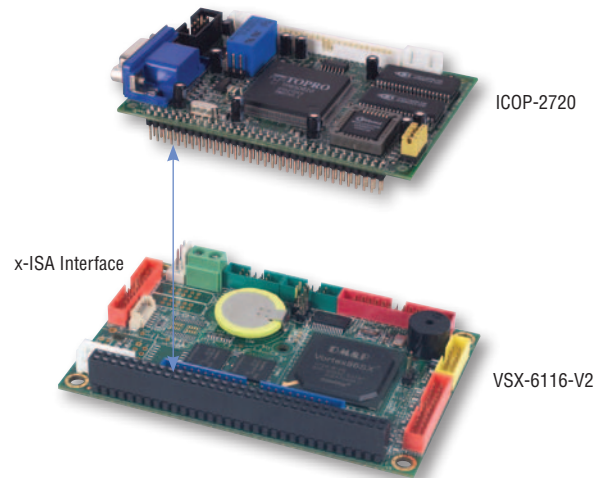

VGA function support via x-ISA interface

- 1  $\mu$ Processor Module
- 2 Tiny Module
- 3 PC/104 CPU module
- 4 Half-Size CPU module
- 5 3.5" CPU module
- 6 Peripheral Module
- 7 Display Product Series
- 8 Accessories & Technical Information