

UNO-420

Intel® Atom™ PoE Powered Device Sensing Gateway with 3 x COM, 2 x LAN (1 x PoE), 8 x GPIO, HDMI, USB3.0

NEW



Introduction

The new UNO-420 is ruggedized fanless design with Intel® Atom™ E3815 Processor, 3x COM port, 2x LAN port (one with Power Over Ethernet (PoE) technology), and 8 x Programmable GPIO. PoE allows you to add a device in awkward or remote locations where power cable may not equipment with. It supports one Ethernet cable for both data and power delivery. Ethernet cable, which appears in many existing infrastructures is considerably less expensive than fiber over the scope of an installation. UNO-420 features optimized I/O, PoE-IN, and wide operation temperature, which is suitable for machine data gateway in many industries.

Specifications

General

▪ Certification	CE, FCC, CB, UL
▪ Dimensions (W x D x H)	125 x 125 x 50 mm
▪ Enclosure	Aluminum Housing
▪ Mounting	Wall Mount (Optional Din-Rail)
▪ Weight (Net)	1.5 kg
▪ Power Requirement	10 ~ 30 V _{DC}
▪ Power Consumption	12W (Typical), 20W (Max)

System Hardware

▪ BIOS	AMI EFI64 Mbit
▪ Watchdog Timer	Programmable 255 levels timer interval, from 1 to 255sec
▪ Processor	Intel Atom E3815 1.46GHz
▪ System Chip	Intel Atom SoC integrated
▪ Memory	2GB DDR3L 1066 MHz
▪ Graphics Engine	Intel® HD Graphics
▪ Ethernet Realtek	RTL8111E GbE, 802.10av
▪ LED Indicators	LEDs for Power, Storage (M.2)
▪ Storage	Onboard 32GB eMMC
▪ Expansion	1 x M.2 2242 (B key) 1 x Full-size mPCIe slot (USB/PCIe Signal) 1 x Half-size mPCIe slot (USB/PCIe Signal)

I/O Interfaces

▪ Serial Ports	2 x RS-232/422/485, 0.15~115.2kbps, DB9 1 x RS-485, 0.15~115.2kbps, terminal block
▪ LAN Ports	2 x RJ45 (1x PoE-IN IEEE 802.3at & 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet)
▪ Isolated GPIO	8 x GPIO (Programmable ADC, DAC 12bit), isolated protection, 2000 V _{DC} DI: logic 0: 0~ 1.5 V ; logic 1: 3.5V~5V DO: logic 0: 0~0.4V ; logic 1: 4~5V AI: 12 bit ADC (0~5V scale; Integral Nonlinearity error: 2 Bit Max AO: 12 bit DAC (0~2.5V scale / 0~5V scale; Integral Nonlinearity error: 2 bit Max
▪ USB Port	1 x USB 3.0
▪ Display	1 x HDMI, supports 1920 x 1080 @ 60Hz
▪ Power Connector	1 x 2 Pins, Terminal Block

Software

▪ OS Support	Advinux/ WIN10 IoT Enterprise 2019 LTSC
▪ Application Software	WISE-PaaS/EdgeLink Max Connection: 4 for uplink protocols (MQTT x 4, Modbus x 4...etc.) Max Tag: 3000 Tags

Features


- Intel Atom™ E3815 Processor with 2GB DDR3L onboard memory
- 2 x GbE (1 x PoE-IN), 1 x USB 3.0, 1 x HDMI, 1 x RS-485, 2 x RS-232/422/485, and 8 x Programmable GPIO
- 32GB eMMC storage onboard
- Ruggedized compact fanless design
- Support dual wireless communication for WiFi/3G/4G/GPS
- Support one Ethernet cable for both data & power delivery
- Support Trusted Platform Module (TPM) 2.0 for cyber security
- Advantech WISE-PaaS/EdgeLink support
- Edgelink support MQTT, LWM2M client for cloud communication
- EdgeLink supports more than 200 I/O Drivers
- EdgeLink supports user-defined acquisition period

Environment


▪ Operating Temperature	-20 ~ 60°C (-4~140 °F) @ 5 ~ 85% RH with 0.7 m/s airflow
▪ Storage Temperature	-40 ~ 80°C (-40 ~ 180°F)
▪ Relative Humidity	10 ~ 95% RH @ 40°C, non-condensing
▪ Shock Protection	Operating, IEC 60068-2-27, 50G, half sine, 11 ms
▪ Vibration Protection	Operating, IEC60068-2-6, 2 Grms, random, 5 ~ 500 Hz, 1hr/axis (M.2)

Installation Scenario

Wall Mount Illustration

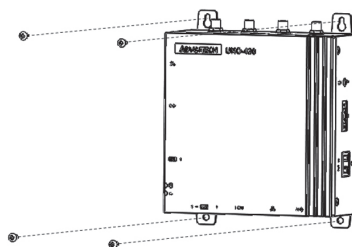


DIN-rail Mount Illustration (Optional)

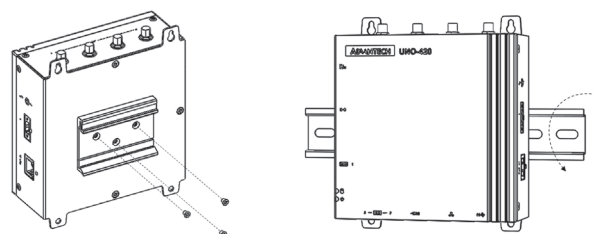


Dimensions

Unit: mm

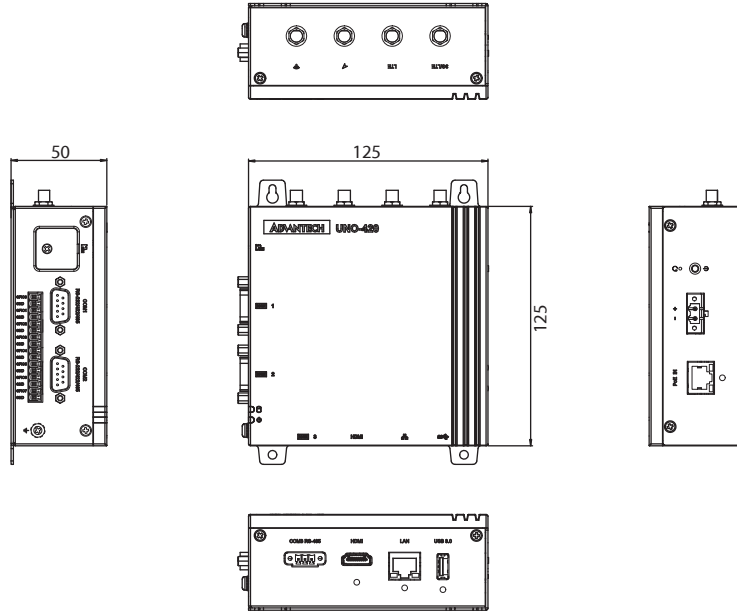

Front I/O View

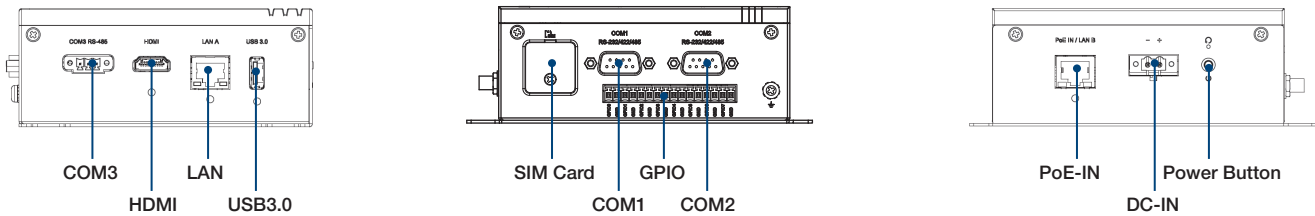

Ordering Information

- **UNO-420-E0A** Intel Atom E3815 1.46 GHz, 4GB, 2 x LAN, 3 x COM, 8 x GPIO, 1 x HDMI, 1x USB3.0
- **ESRP-PCS-UNO420** UNO-420-E0A with Advlinux & EdgeLink

Optional Accessories

- **UNO-400-DMKAE** UNO-4 series DIN rail Kit

Wi-Fi Solution

- **EWM-W157H01E** Half size mPCIe 802.11 a/b/g/n/ac,RTL8821AE,with BT4.0
- **EWM-W135H01E** Half size mPCIe 802.11 a/b/g/n,AR9382,2T2R,Half size Mini PCIe
- **1750008717-01** Dipole Ant. D.B 2.4/5G WIFI 3dBi SMA/M-R BLK
- **1750009035-01** Cable Ant. SMA/F-BH MHF1/113 BLK L100mm

3G/LTE Solution

- **EWM-C117FL03E** LTE/HSPA+/GPRS module, w/ SIM Slot,TOBY-L200, for USA AT&T, T-Mobile,w/o voice function
- **EWM-C117FL04E** LTE/HSPA+/GPRS module, w/ SIM Slot,TOBY-L210, for Europe, APAC,w/o voice function
- **EWM-C117FL05E** LTE/HSPA+/GPRS module, w/ SIM Slot,TOBY-L210H-60S, for Japan Softbank/w/o voice function
- **EWM-C117FL06E** LTE/HSPA+/GPRS module, w/ SIM Slot,TOBY-L280H, for Taiwan. w/o voice function
- **EWM-C145FL01E** LTE/HSPA+/GPRS (WCDMA and CDMA) for China
- **1750008697-01** Dipole Ant.698-960/1710-2700MHz SMA/M RG174GRY
- **1750009036-01** Cable Ant. SMA/F-R-BH MHF1/113 BLK L100mm

GPS Solution

- **EWM-G109H01E** Advantech GPS module, u-blox NEO-M8N multi-GNSS (GPS, Beidou, GLONASS, Galileo, QZSS and SBAS)
- **1750006426** Antenna 2 dBi SMA-Male L=171.5mm AN8921F-92B01SM
- **1750006264** Antenna SMA(F)/MHF 15cm SMALFN8-3150A-00X00R

Router

- **ICR-1601G** Industrial Cellular Router,GPS,EMEA,2x ETH,ACC
- **EKI-6333AC-A** IEEE 802.11 a/b/g/n/ac Wi-Fi AP

Adapter & Power Cable

- **96PSA-A60W24T2** A/D 100-240V 60W 24V C14 CORD END TERMINAL
- **1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- **1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- **1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- **1700000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)

Embedded OS

- **20703WX9ES0003** WIN 10 IoT Enterprise 2019 LTSC