



Stainless Steel Panel PC



Features

- 23.8" Intel® 6th / 7th Generation Fanless Stainless Panel PC
- IP66/69K Full Sealed with Anti-Corrosion Enclosure
- Support Intel® vPro technology by CPU
- Optional IP67 M12 Stainless Connectors
- Special Inspection of 100% Waterproof Guarantee
- CE, FCC, VCCI Class B Certified
- Screen Touch Luck Function


| Product | | WTP-9E66-24 | |
|-------------------------------|-------------------------------------|--|--|
| Main System | CPU | Intel® 6th/ 7th generation core i7/i5 processor | |
| | Graphic | Intel® integrated HD Graphics | |
| | Memory | Two 2133 DDR4 SODIMM socket support dual Channel, non-ECC, up to 32GB | |
| | OS Support | Windows 7, Windows 7 pro, Windows 8, Windows 10 | |
| Display | Size | 23.8" 16:9 | |
| | Resolution (pixel) | 1920 x 1080 (Full HD) | |
| | Number of Colors | 16.7M colors (RGB 6-bit + Hi FRC) | |
| | View Angle (H/V) | 178(H) / 178(H) | |
| | Brightness(cd/m ² , nit) | 250 nits | |
| | Contrast Ratio | 3000:1 (Тур) | |
| | Туре | Full flat projected capacitive touch panel | |
| Touch Panel | Hardness | ≧7H | |
| Touch r anei | Light Transmission | ≧85% | |
| | Lifetime | 100M times | |
| Storage & | Storage | 2.5" SATA HDD | |
| Expansion | Expansion | Mini PCIe x 1, M.2 Type E x 1 | |
| | USB | 1 x M12 8pin for USB 1/2, 1 x M12 8pin for USB 3/4 | |
| I/O Ports | СОМ | 1 X M12 8pin/ RS-232, 1 X M12 8pin/ RS-232/422/485 | |
| | LAN | 1 x M12 8pin for LAN x 1 | |
| | DC in | 1 x M12 5pin DC power connector | |
| | Control Keys | Rear bottom: Power on /off | |
| | Power input | DC 9V~32V | |
| Power | Power adapter | AC100~277V/ 47 ~ 63 Hz / DC output 24V, IP67 | |
| | Power consumption | 62.4W | |
| Environmental | Temperature | Operating Temperature 0~40°C(12V DC) Storage Temperature -20~60°C | |
| | Humidity | Operating & Storage: 10 ~ 90%, non-condensing | |
| | Water/Dust resistance | IP66/ NEMA4X/ IP69K | |
| Mechanical Characteristics | Housing | Stainless steel (SUS304), chassis type | |
| | Dimensions (Net: mm) | 626.6 x 396.1 x 64.0 | |
| | Weights (Net: kg)) | 14.8 kg | |
| | Mounting | VESA 100*100, Side Mount (M6 x 2) | |
| Certification | FCC-B, CE (EMC), VCCI Class B | | |

Specification



WTP-9E66-24

Stainless Steel Panel PC

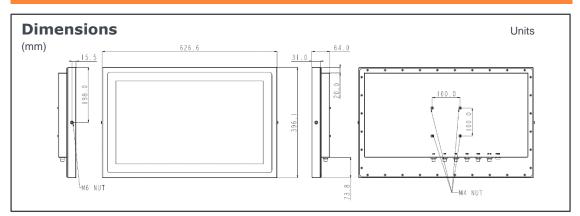

| Major Options | | | |
|---------------|---|--|--|
| Add On Parts | ^①Wireless LAN or Wireless and BT kit (Easy Clean and Robust Antenna or 2 ant), ②SSD, ③ External LAN x 2, ④ Waterproof USB 3.0, ⑤ Stainless M12 connector, ⑥ TPM2.0, ⑦ IP67, ⑧ SUS316 Enclosure | | |
| Add on Cable | 0 Waterproof M12 to 1 x COM cable, 0 Waterproof M12 to 1 x USB cable, 0 Waterproof M12 to 1 x LAN cable | | |
| Optional kits | ①Wall mount/ Table mount bracket | | |
| Customized | ①Sunlight readable optical bonding, ② 1000 nit high brightness LCD , ③ LCD Auto dimming, ④ LCD Super dimming (Low brightness) , ⑤ 5W/2WSpeaker, ⑥ Second HD, ⑦COM+power 5V or 12V, ⑧ Barcode reader | | |

Order Information

| Item | Cooling | Description |
|-------------|---------|--|
| WTP-9E66-24 | Fanless | 23.8" Core i5-6200U / DDR4 4G RAM/ 500G HDD/ PCT touch |
| WTP-9E66-24 | Fanless | 23.8" Core i5-7200U / DDR4 4G RAM/ 500G HDD/ PCT touch |

