

Relied upon since 1969




## TAVSEAL-2

This high security container seal includes an exclusive high security design and complies to ISO 17712:2013 testing.

### Key features

- ISO 17712 and C-TPAT-compliant.
- Laser marked serial numbering on body, pin shaft and head.
- Non spin model (pin shaft does not rotate once locked).

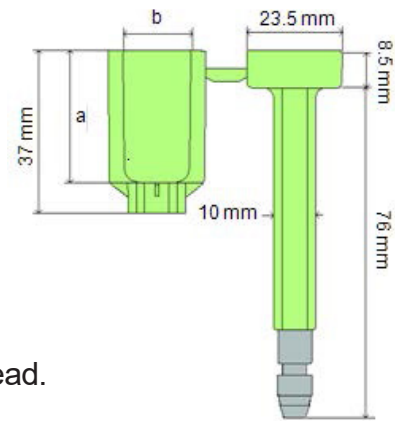

### Material

Body: ABS

Pin: Low-carbon steel

### Dimensions

10mm diameter shaft.  
23.5mm diameter head.

### Carton (200 units)

Size: 444 x 340 x 140mm  
Weight: 15.1kg

### Strength Characteristics

Tensile Strength – 20 kN  
Shear Test – 8.9 kN  
Bending Test – 67 Nm  
Impact Test 1 (18± 3 °C) – > 40.68 J  
Impact Test 2 (-27± 3 °C) – > 40.68 J

### Minimum Order

Sold in multiples of 50



Code	Description
WE60114	TAVSEAL-2 - Yellow - Stock Numbered

**Usage instructions:** Simply detach the seal's pin shaft and body. Then place the tip of the security seal's pin in the body's slot. An audible click will be heard when secured.

Bolt cutters or other standard bolt removal tools can be used to remove bolt seals. Special precautions should always be taken when removing any type of container seal.

**Applications:** Suitable for a wide range of applications, some typical applications include cargo container, trailer and rail freight security.

Product specifications are subject to change (specification code – SH751)

NSW +61 (0) 2 9454 4200 VIC +61 (0) 3 8581 9100 QLD +61 (0) 7 3209 8225 [harcor.com.au](http://harcor.com.au)