



The Smallest Possible Factors™

Constant Current LED Driver

Model Number AC10CD250AT2K

- Input Voltage:** 120-277 VAC (±10%)
- Input Frequency:** 50/60 Hz
- Dimming:** 5 to 100%
- Surge Protection:** 2 Kv
- Side Mount/Leads
- Multi-Switching Current

PHYSICAL DIMENSIONS:

- Length:** 2.29"
- Width:** 1.20"
- Height:** 0.91"
- Mounting:** 2.2"
- Weight:** 0.10 lbs.




ACTUAL SIZE

ELECTRICAL SPECIFICATIONS:

Output Power Max	Input Power	Input Current	Min. PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Min. Starting Temps.	IP Rating	Dimming Protocol	Dimming Range	Efficiency Up To
10 W	11.8 W	0.11 A @ 120 V 0.05 A @ 227 V	>0.9	<20	32-40 V	250 mA ±5%	75° C	0° C	20	0 to 10 V	5 to 100%	85%
7 W	8.2 W	0.08 A @ 120 V 0.03 A @ 277	>0.9	<20	32-40 V	175 mA ±5%	75° C	0° C	20	0 to 10 V	5 to 100%	85%
4 W	5 W	0.05 A @ 120 V 0.02 A @ 277 V	>0.9	<20	32-40 V	100 mA ±5%	75° C	0° C	20	0 to 10 V	5 to 100%	80%

WIRING:

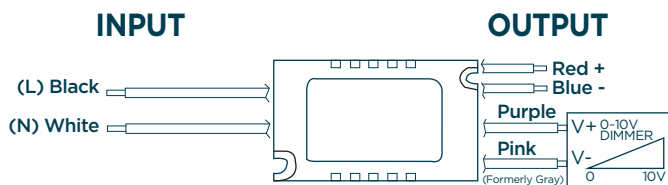

Note: Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.

LEAD LENGTH:

- Black 6"
- White 6"
- Blue 6"
- Red 6"
- Purple 6"
- Pink 6"

APPROVED DIMMERS:

- Lutron NTSTV-DV
- Lutron NFTV
- Leviton IP710 DL
- Watt Stopper ADF 120277

To order or consult with one of our engineers, contact us at:
800-375-6355 / aceleads.com



SAFETY & PERFORMANCE:




- Class P Listed
- Class A sound rating
- No PCBs
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of $\leq 75^{\circ}\text{C}$
- Warranty: 5 yrs based on max case temp of 75°C^*
- Input/Output Isolation
- Surge Protection (2 KV)
- Certified For Damp Locations
- Dimming Curve on the next page
- Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- Max Remote installation distance is 33 ft
- 22 AWG 600V/105C tinned stranded copper lead-wires are required to use in installation

*ACE LEDS/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years from date of manufacture when operated at max case temp of up to $\leq 75^{\circ}\text{C}$ when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

PERFORMANCE METRICS: AC10CD250AT2K

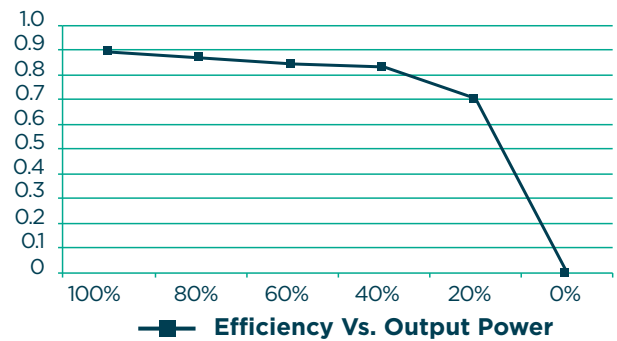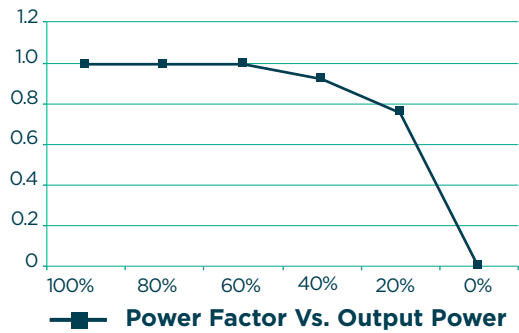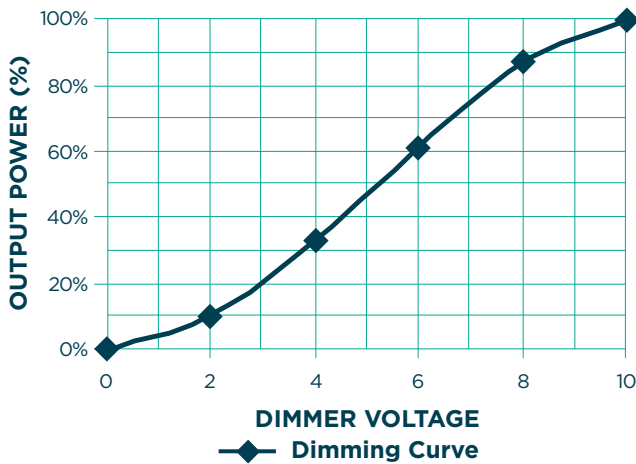

3401 Avenue D, Arlington, TX 76011
800-375-6355 • aceleds.com

Data is based upon tests performed by ACE LEDS in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

