




Drainage Pumps

Applications

- Sewage treatment plants
- Industrial draining
- Agriculture irrigation

Operating conditions

Maximum fluid temperature up to +40°C

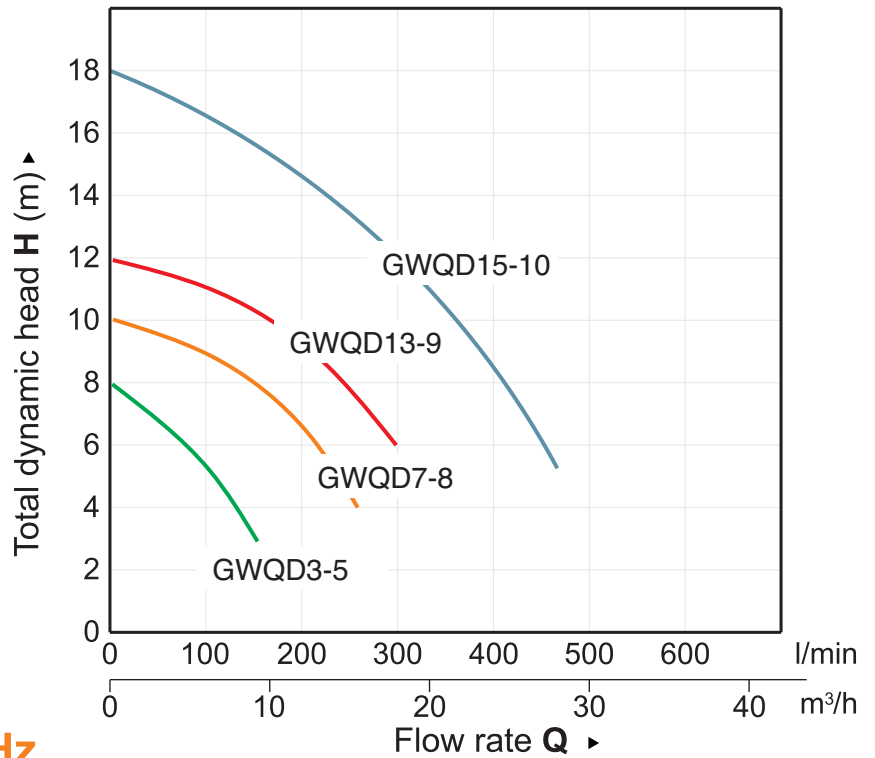

PERFORMANCE DATA 50Hz

MODEL	P ₂		DELIVERY n≈2850 1/min														
	kW	HP	Q	0	3	6	9	12	15	18	24	30	36	40			
			$\frac{m^3/h}{l/min}$	0	50	100	150	200	250	300	400	500	600	667			
GWQD3-5	0.25	0.33	H(m)	8.0	7.0	5.0	3.0	-	-	-	-	-	-	-			
GWQD7-8	0.55	0.75		10.2	9.5	8.8	7.8	6.3	4.0	-	-	-	-	-			
GWQD13-9	0.75	1		12.1	11.6	11.0	10.3	9.5	7.8	5.8	-	-	-	-			
MODEL	P ₂		DELIVERY n≈2850 1/min														
	kW	HP	Q	0	5	10	15	20	25	30	35	40	45	50	55	60	65
			$\frac{m^3/h}{l/min}$	0	83	167	250	333	417	500	583	667	750	833	917	1000	1083
GWQD15-10	1.5	2	H(m)	18.2	16.4	15.3	13.4	11	7.7	-	-	-	-	-	-	-	-