



DOMINONI

AD OCCHI CHIUSI
WITH YOUR EYES CLOSED

www.dominoni.com

LINEA TAGLIO DIRETTO
DIRECT CUT LINE

MPD





MPD 612 L

COCLEA DI ALIMENTAZIONE di grande dimensione e flottante, possibilità di variarne i giri.

TRASMISSIONE della COCLEA (con catena lubrificata a goccia d'olio) tramite ingranaggio avvitato direttamente sul cilindro della medesima e con numero di giri regolabile.

BARRA A DISCHI Kuhn.

TELAIO OSCILLANTE con ruote su cuscinetti.

GRANDE BOCCA DI ALIMENTAZIONE regolabile in altezza idraulicamente dal posto di guida.

TRASMISSIONE della BARRA DISCHI con catena a bagno d'olio a regolazione automatica.

SLITTE in materiale antiusura facilmente regolabili in altezza.


FRIZIONI DI SICUREZZA e **CARDANI** Walterscheid.

TELAIO robusto, con letto coclea in acciaio antiusura.

VELOCITÀ di raccolta elevatissima con possibilità di raccolta anche di prodotti molto alti (sorgo) grazie al grande innalzamento della barra di schiacciamento.

TAGLIO rasente al suolo. La macchina, oltre ad adattarsi e galleggiare perfettamente al suolo, ha una perfetta alimentazione.

SEMPLICITÀ, AFFIDABILITÀ e **ROBUSTEZZA** caratterizzano la nostra barra a taglio diretto.

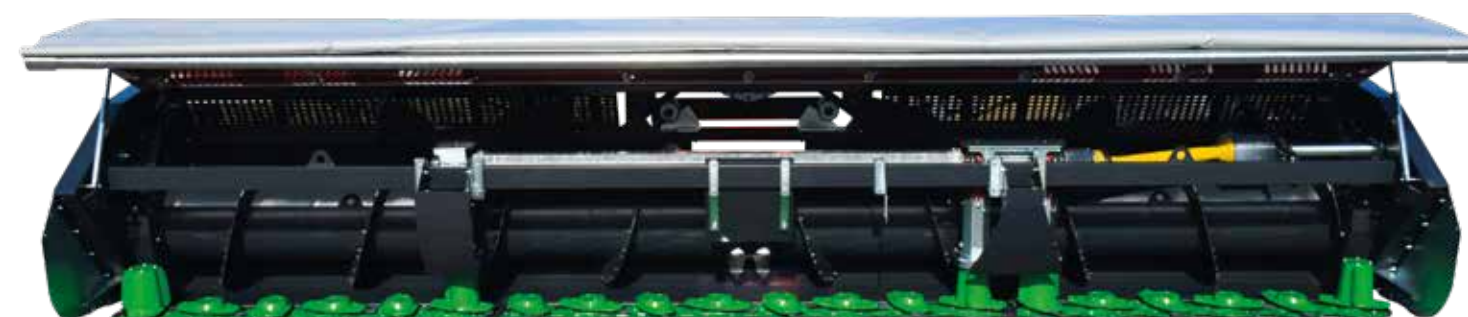

MPD 760

LARGE-SIZED FLOATING FEEDING AUGER with the possibility of adjusting the degree of compression of the product and varying the rpm.

AUGER TRANSMISSION (with oil drop lubricated chain) by means of a gear screwed directly to the transmission cylinder with adjustable rpm.

Kuhn **DISCS BAR**.

FLOATING FRAME with wheels on bearings.

BIG FEEDING CHANNEL hydraulically adjustable from the driving seat.

DISCS BAR TRANSMISSION with automatically adjustable oil bath chain.

Wear-resistant **SLIDES** easily adjustable in height.

Walterscheid **SAFETY CLUTCHES** and **CARDAN SHAFTS**.

Solid **FRAME** with auger bed in wear-resistant steel.

Extremely high collection **SPEED** with possibility to harvest very high products as well (sorghum) simply by lifting the crushing bar.

CUT LEVEL very close to the ground: the machine, besides fitting and adjusting completely to the ground, stands out for a perfect feeding.

SIMPLICITY, RELIABILITY and **STRENGTH** are the main qualities of our direct cut mower.



| Modello Models | Dimensioni Dimensions | | Larghezza di taglio Cutting width | | Peso Weight | | Coltelli Knives | Potenza Power |
|-------------------|--------------------------|-----------------|--------------------------------------|-------|----------------|-------|--------------------|------------------|
| | m | ft | m | ft | Kg | Lbs | | |
| MPD 460L | 4,60x1,30x2,20 | 15,09x4,26x7,22 | 4,60 | 15,09 | 2.670 | 5.886 | 24 | 80 |
| MPD 535L | 5,35x1,30x2,20 | 17,55x4,26x7,22 | 5,35 | 17,55 | 2.860 | 6.305 | 28 | 95 |
| MPD 612 L | 6,10x1,30x2,20 | 20,01x4,26x7,34 | 6,10 | 20,01 | 3.150 | 6.944 | 32 | 110 |
| MPD 760 | 7,60x1,30x2,20 | 24,93x4,26x7,34 | 7,60 | 24,93 | 3.920 | 8.642 | 40 | 120 |



DOMINONI NEL MONDO

DOMINONI IN THE WORLD



DOMINONI

Via Provinciale 12, n. 3 - 26010 CAMISANO (Cr)
Tel. +39 0373 77312 - Fax +39 0373 77214
info@dominoni.com www.dominoni.com

