

AVIATOR


Grand Tour Collection

Channeling the daring, industrial spirit of the early 1900s, Aviator propels the Grand Tour collection to a higher stratus, with a nod to vintage aircraft design. This tile pattern mixes machine carving, inlaid metal, and hand-finishing to evoke the early days of flight, when the metal surfaces of airplanes were riveted into place with irregular sheets.




AVIATOR


Grand Tour Collection

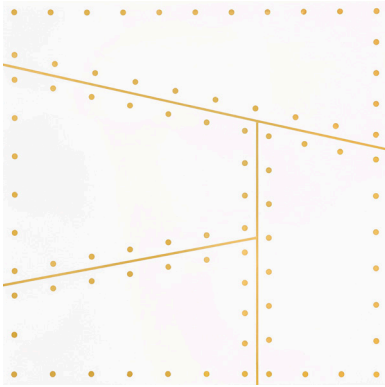

Thassos Marble - Brass Inlay
Polished

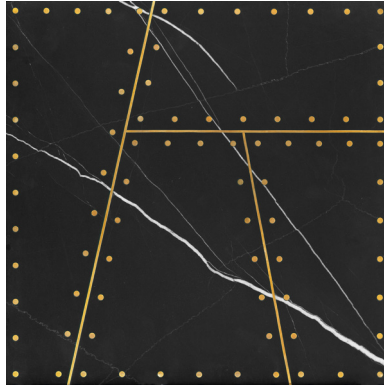


Nero Marble - Brass Inlay
Honed

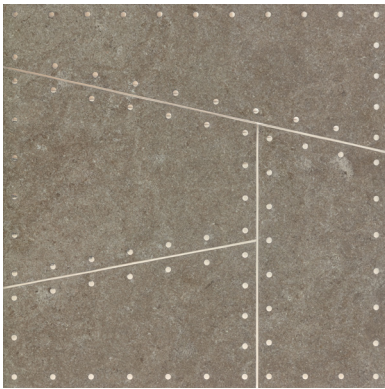


Sea Grey Limestone - Stainless Steel Inlay
Polished


*Pattern is best displayed random, do not repeat tile orientation.
We recommend rotating consecutive pieces 90°.

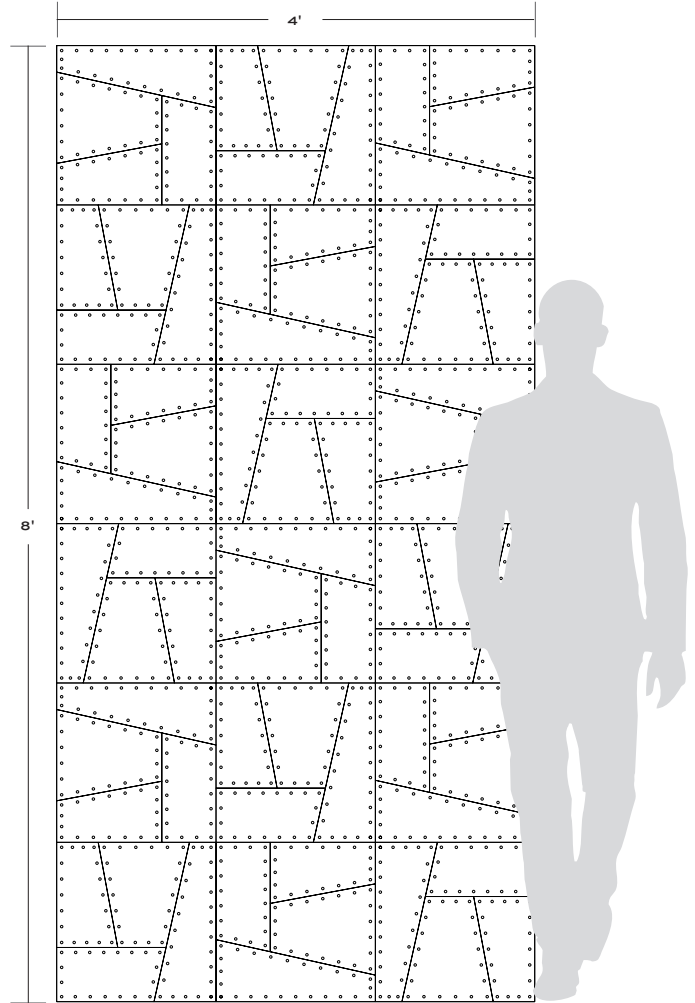

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light Traffic Residential	Dry Applications Only	No	No	No	No	No	No	No

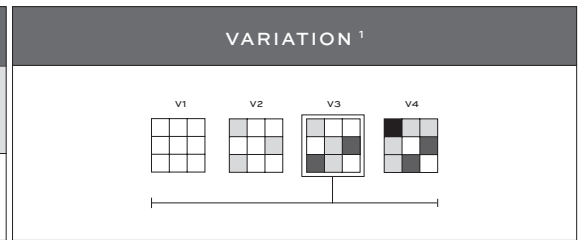

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 White ²	Ardex FL Rapid Set Sanded ³	1/8" minimum	Mapei Mapelastick AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Recommended

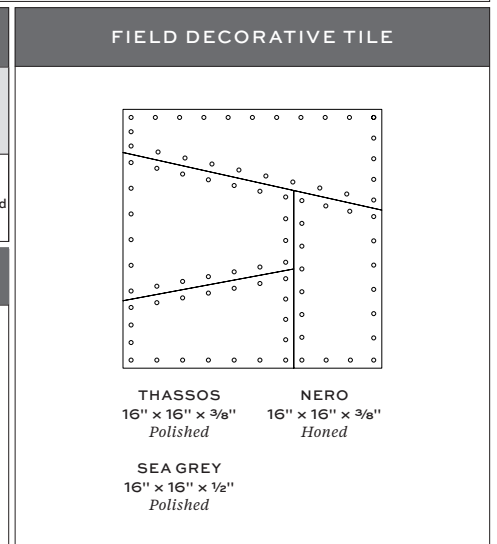

NOTES

¹Variation: Thassos - V2, Sea Grey & Nero - V3
²Alternate mortar - Mapei Ultraflex 2 White or Ardex N23 White Microtec Rapid Set
³Sea Grey Only - Ardex X77 White or Mapei Ultraflex LFT White or Mapei Granirapid White 2-part System
³Alternate grout - Flexcolor CQ

Aviator is handmade, expect variation in overall color and surface finish.
 Shine can be restored with using Flitz Paste Polished, apply a small dot of Flitz Paste Polished to the affected brass. Run a shop rag or microfiber cloth on the metal. Do not use a circular motion, avoid extended contact with grouted areas. Use a moist paper towel to wipe off any excess Flitz Paste Polished, do this quickly to avoid any finish changes in grout. Test a small area before applying to entire surface. Pattern is best displayed random, do not repeat tile orientation. We recommend rotating consecutive pieces 90°. Not suitable for use near heat, such as fireplaces or stove tops.