

DARK ARABESCATO OROBICO

With a vivid mixture of dark grey, black and white, Dark Arabescato Orobico features dramatic sweeping movements. Stocked in polished 12" \times 24" field tile with polished 3 cm thick slab to match.

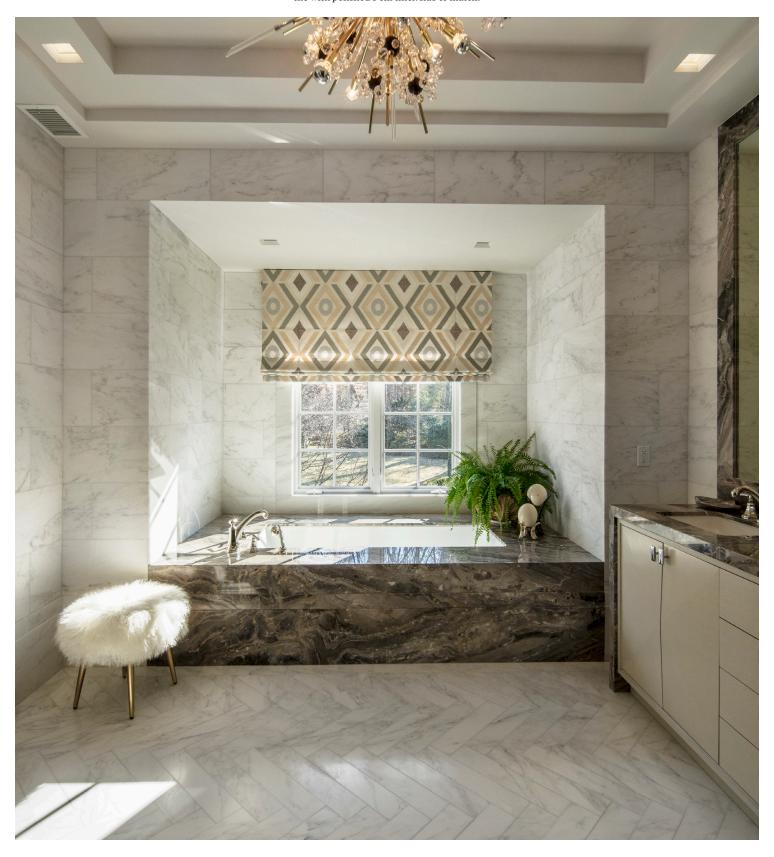

DARK ARABESCATO OROBICO

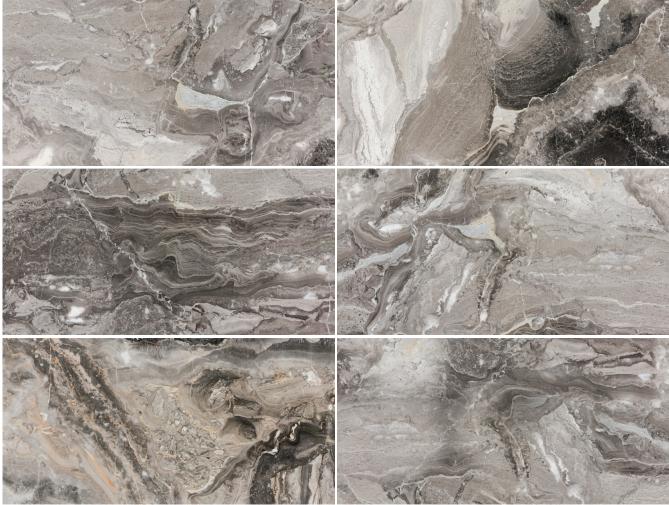

Polished

			APPLIC	ATIONS		VARIATION	TAILORED TO CUSTOMIZATION ²		
INTERIOR FLOOR Light Traffic Residential	INTERIOR WALL All, excluding showers	SHOWER WALL	SHOWER FLOOR No	EXTERIOR FLOOR	EXTERIOR WALL No	POOL/ FOUNTAIN	COUNTER TOP Yes		CARPET CUTTING
								V1 V2 V3 V4	FIELD
									FINISH
									MOSAIC
									SADDLE
									VANITY TOP
									WATERJET

INSTALLATION/MAINTENANCE											
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Mapei Kerapoxy 410	Ardex FG-C Microtec Unsanded ³	¹ /16'' minimum	Mapei Mapelastic AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	See Notes Below ⁴	No	Sample ⁵		

NOTES

- $^{\mbox{\tiny 1}}$ The MIA does not recommend installing resin-backed stone in wet areas
- $^{\rm 2}\, Saddle\, \& \, Vanity\, Top$ Slab
- ³ Alternate grout Mapei Ultracolor Plus & Mapei Keracolor Unsanded
- ⁴ For field tile use TCNA Handbook, for slab use MIA DSDM
- $Mortar\ Note: The\ MIA\ recommends\ installing\ resin-backed\ stone\ with\ epoxy-based\ setting\ materials.\ Consult\ your\ setting\ materials\ manufacturer\ for\ specific\ recommendations.$
- $This \ material \ has \ distinctive \ veining \ that \ may \ crack \ or \ break \ with \ handling. \ Order \ an \ additional \ 10\% \ overage \ as \ compared \ to \ other \ materials.$
- $^{\rm s}$ Layout for overview of material before installation.

FIELD TILE 12" x 24" x 3/4" Polished SLAB 3/4 (2CM) & 1 1/4 (3CM) Polished

AVAILABLE SIZES