
GEMSTONE COLLECTION

Semi-precious gemstones have inspired us since antiquity. Ancient cultures ascribed special properties to exotic gemstones like quartz, amethyst, and natural agate. Whether or not you believe in the mystic potency of gemstones, there is no denying their potent beauty. Artistic Tile's Gemstone Collection slabs present the finest of these materials in a versatile format, so they may be prominently displayed in your home or commercial space. These agglomerate slabs are bright and beautiful, polished to a high shine, and can be backlit for a sparkling, crystalline glow.



GEMSTONE COLLECTION

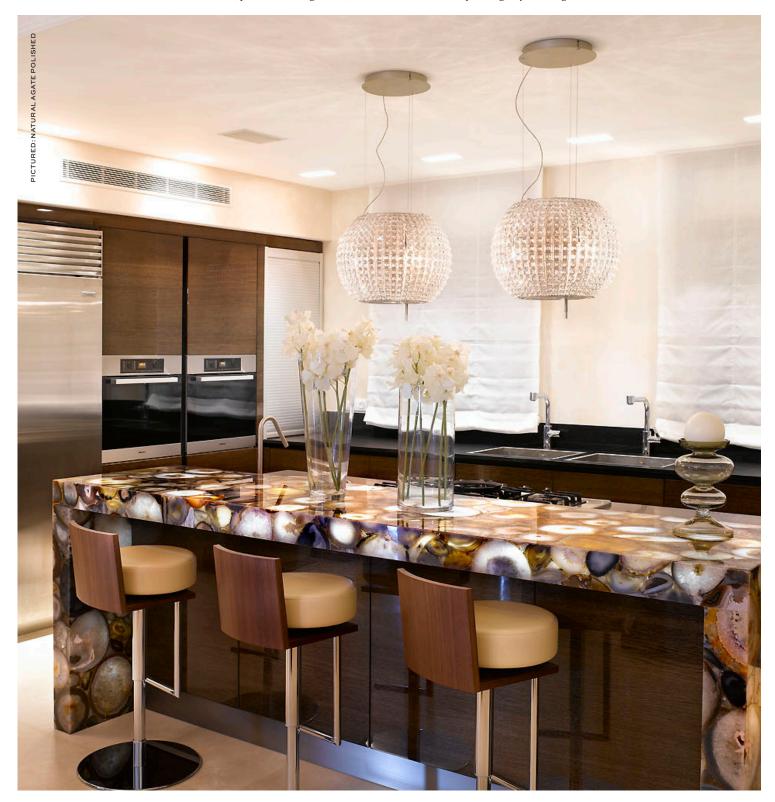

Rose Quartz - Polished




White Quartz - Polished



Smokey Quartz - Polished



Natural Agate - Polished



Amethyst - Polished



Blue Agate -Polished

APPLICATIONS											
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP				
Heavy Traffic Residential	All	Yes, including steam	No	No	No	No	Yes				

INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER		V1	V2	V3
Heavy Traffic Residential	All	Yes, including steam	No	No	No	No	Yes				
	INSTALLATION/MAINTENANCE										

APPLICATIONS								VARIATION
ITERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	V1 V2 V3 V4
Heavy Traffic sidential	All	Yes, including steam	No	No	No	No	Yes	
INSTALLATION/MAINTENANCE								SLAB

INSTALLATION/MAINTENANCE											
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER*	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT		
Mapei Kerapoxy 410	Mapei Keracolor Unsanded	½" minimum	Mapei Mapelastic AquaDefense	Mapei Keracaulk Unsanded	Not Required	AquaMix Concentrated Stone & Tile Cleaner	MIA DSDM	No	Required		

NOTES

Slab edges are not suitable for profiling. A mitered apron is recommended, as shown to right.

Interior use only, resins may yellow if exposed to direct sunlight.

Fabrication Notes: Gemstone is fabricated using granite tools and methods.

Granite cutting disk as a speed of 1-ft/minute.

Polish edges beginning with diamond tools and progressing to polishing paper. Begin with 60-grit and progress to 6000-grit for maximum shine.

Tenax super marble glue is to be used for seams and adhering mitered edges and laminates.

Tec 7 Super 7 silicone is recommended for adhering sinks.

 $Do \ not \ store \ singly \ on \ A-frames. \ Gemstone \ slabs \ must \ be \ backed \ by \ other \ slab \ materials \ for \ storage.$

3/4 (2CM) Unfinished Edge Polished Full size: 56 3/4" × 114" × 3/4" (2cm) Half size: 28 3/8" × 114" × 3/4" (2cm) Mitered Apron Detail