


Active DisplayPort 1.2 to HDMI Cable 4K 60 Hz 10 m

Description

This cable by Delock enables the connection between devices, e.g. a monitor, with HDMI connector to a DisplayPort interface.

Active cable

The cable offers an active conversion, thus it is also suitable for graphics cards that are not capable of outputting DP++ signals.

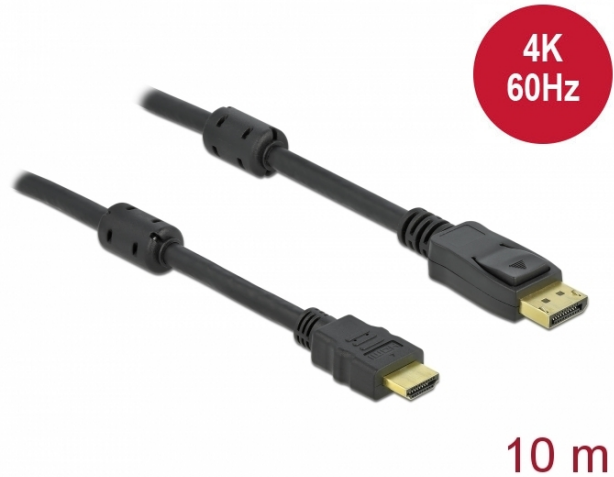

Specification

- Connectors:
 - 1 x DisplayPort male >
 - 1 x HDMI-A male
- Signal direction: DisplayPort input > HDMI output
- Chipset: Parade PS176
- DisplayPort 1.2 and High Speed HDMI specification
- Cable gauge: 28 AWG
- Cable diameter: ca. 7.2 mm
- Contacts gold-plated
- Active cable, for graphics cards with DP and DP++ output
- Transmission of audio and video signals
- Resolution up to 3840 x 2160 @ 60 Hz (depending on the system and the connected hardware)
- Supports 3D displays (1080p @ 120 Hz)
- Supports HDCP 1.3
- Supports Eyefinity
- 2 x ferrite core
- Colour: black
- Dimensions of signal amplifier (LxWxH): ca. 8.00 x 2.20 x 1.35 cm
- Length incl. connectors: ca. 10 m

Item no. 85960

EAN: 4043619859603
 Country of origin: China
 Package: Zip poly bag

System requirements

- A free DisplayPort female

Package content

- DisplayPort to HDMI cable

Images



General	
Specification:	DisplayPort 1.2 High Speed HDMI
Interface	
Connector 1:	1 x DisplayPort male
Connector 2:	1 x HDMI-A male
Technical characteristics	
Chipset:	Parade PS176
Maximum screen resolution:	3840 x 2160 @ 60 Hz
Physical characteristics	
Ferrite core:	2 x
Pin finishing:	gold-plated
Conductor material:	copper
Conductor gauge:	28 AWG
Shielding:	triple
Diameter:	7.2 mm
Length:	10 m
Colour:	black