


Delock PCI Express x4 Card > 1 x internal NVMe M.2 Key M – cross format

Description

The Delock PCI Express card expands a PC by one M.2 slot. An M.2 SSD in format 2280, 2260, 2242 and 2230 can be connected.

M.2 NVMe

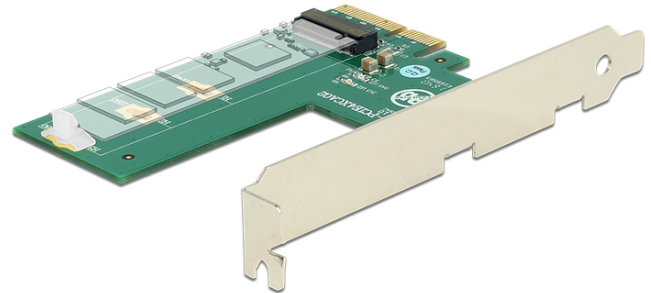

Specification

- IOI part number: M2-PCIE4XCA02
- Connector: internal:
 - 1 x 67 pin M.2 key M slot
 - 1 x PCI Express x4, V4.0
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 39 Gbps
- Supports NVMe Express (NVMe)
- 2 x LED indicator

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card

Item no. 89561


EAN: 4043619895618

Country of origin: Taiwan, Republic of China

Package: Box



Images

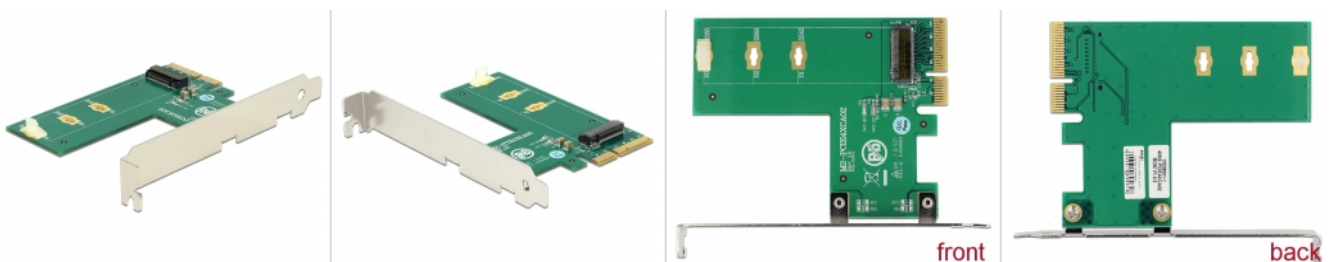

General

Supported operating system:

- Linux Kernel 3.19 or above
- Windows 7 32-bit
- Windows 7 64-bit
- Windows 8.1 32-bit
- Windows 8.1 64-bit
- Windows 10 32-bit
- Windows 10 64-bit

Slot: PCIe

Supported module: M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe

Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported

Interface

Internal:

- 1 x 67 pin M.2 key M slot
- 1 x PCI Express x4, V3.0

Technical characteristics

Data transfer rate: up to 39 Gbps