

Make sure the vehicle is approved/homologated by the manufacturer to tow a trailer!

Also please check that there is a definite compatibility between this vehicle and the electric kit!

Following the installation of the electric kit, the fitting instructions should be kept together with the vehicle service document and vehicle handbook. The fitting instructions contain important information relating to the use and function of the towing kit as well as for any diagnostic or activation process, that might have to be repeated in the future (e.g. after the performance of a vehicle software update).

All warranty claims will be forfeited if the electric kit or components contained therein are used incorrectly or modified. If a towing socket adaptor has been used to connect to the trailer or bike rack, this must be removed from the trailer socket once the trailer or bike rack has been disconnected

If the trailer or bike rack is not equipped with a rear fog lamp, depending on the towing vehicle type, the correct function of the towing kit cannot be guaranteed. In such cases, a rear fog lamp should be retro fitted.

This towing electric kit will not be covered under warranty if any technical or electrical modifications or software updates have been performed by the vehicle manufacturer after the initial commissioning of the kit. That applies especially to modifications or updates which may cause malfunctions in the trailer socket or any other part of the trailer electrical equipment!

Depending on the type of trailer module used in this electric kit, diagnostic interrogation with the vehicle's electrical system may be limited or will not function. The error memory inside the trailer module may not be able to be accessed by vehicle manufacturers diagnostic system.

Error logs relating to the trailer electrical equipment, that may be generated in the vehicle manufacturers diagnostic system as a result of a test procedure, may be due to the incorrect installation of the towing electric kit or the false activation of the trailer module.

We always recommend whenever possible, the following troubleshooting process:

An analysis of the vehicle's error memory and possibly clearing of all faults before the start of the installation!

Try disconnecting the trailer module from the towing harness and re-start the fault clearing process!
 If in doubt, limit the time for troubleshooting to a max of 0,5 hours and call our Technical Support Team!

Please follow our instructions carefully and always test the towing electrics using a true lighting board or a specifically designed bulb tester. If an LED tester is used, ensure it is equipped with correct load resistors or malfunctions will occur!

1/23


This instruction is subject to changes and we reserve the right to make changes to design, colour etc. All of the data and illustrations may not be an exact representation but the text contained in this instruction must be observed!

ECS Electronics UK The Old Dyehouse Macclesfield Cheshire, SK11 7RN UK

SALE: +44 (0) 7980 847124 TECHNICAL: +44 (0) 7440 202052 WEB: www.ecs-electronicsuk.co.uk

Email-sales: n.lea@ecs-electronics.com Email-technical: ts-uk@ecs-electronics.com

Revision: 3/19.03.2020 MZ-156-13U

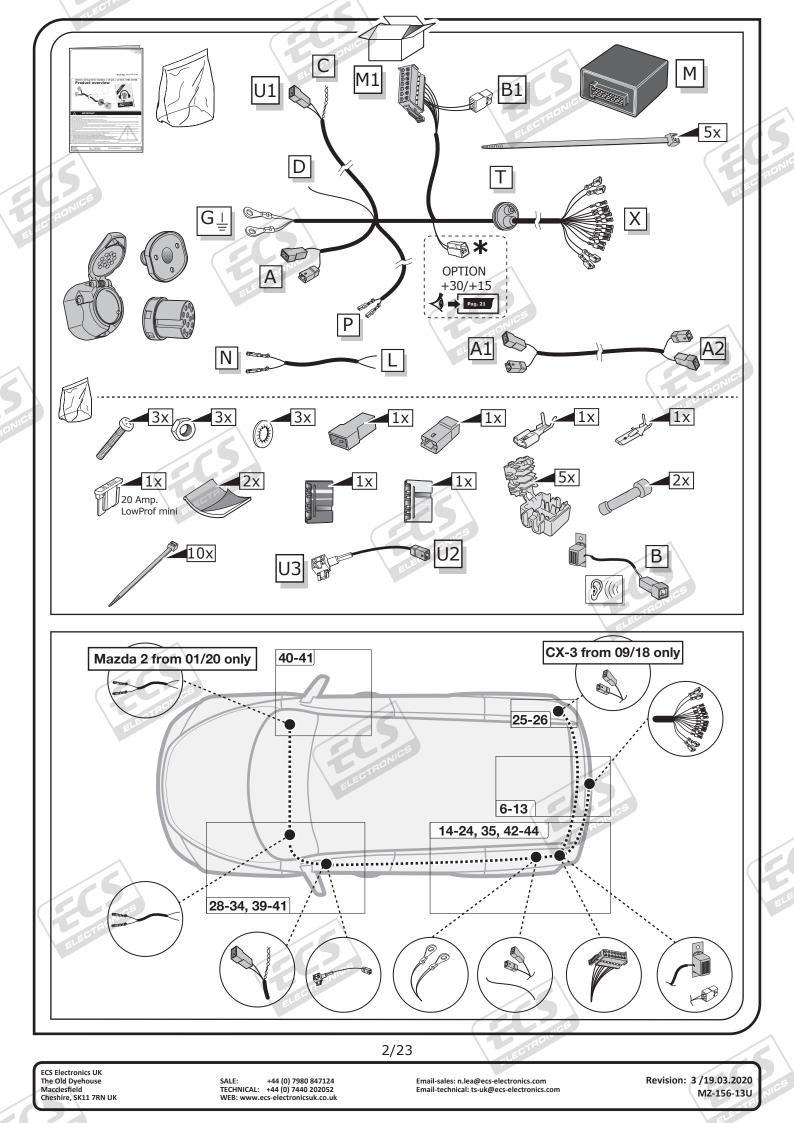



	-Ŏ-	Left (58-L) respectively Right (58-R) tail light		Cigarette lighter / accessory socket
	54 STOP	Stop light (54) / high mounted, third stop light (54)		Loudspeaker / buzzer
		Turn signal indicator left		Park Distance Control
		Turn signal indicator right		Switch / source of function
onic		Rear fog light(s)	•	Connect together
TE	Reverse 05	Reversing light(s)	••	Disconnect
3		Permanent power supply / 13pin socket, chamber 9	4	Look at / See further information
15		Charging wire for trailer battery / 13pin socket, chamber 10		Look carefully at selected area
		Trailer / trailer recognition	V	Present / Occupied / OK
	B+/30	Permanent current power supply	Xare	Not present / Not occupied / Not OK
	<u>_</u>	Ground or Earth (31)	D((((Acoustic indication
	Θ	Ground connection battery terminal lug	\triangle	Attention / important advice
	•	Positive connection battery terminal lug	20 Amp.	Fuse / fuse capacity 20 Ampère
	>	ELEU TI		
	June -			
	6			
The ve	hicle's cooling	capacity may have to be increased when retr manufacturer's instructions!!		
The ve	hicle's cooling	capacity may have to be increased when returns	The management of the stored radii disconnecting a trailer couple of the stored radii disconnecting a traile	
The ve You m	ehicle's cooling out observe the	capacity may have to be increased when returns	rofitting a trailer coup Note: It may to check if th a stored radii disconnecting	ling!
The ve You m	ehicle's cooling out observe the ENTION! In di B	capacity may have to be increased when retr manufacturer's instructions!!	The vehicle's electrical starting work!	ling!


ECS Electronics UK The Old Dyehouse Macclesfield Cheshire, SK11 7RN UK


3

SALE: +44 (0) 7980 847124 TECHNICAL: +44 (0) 7440 202052 WEB: www.ecs-electronicsuk.co.uk Email-sales: n.lea@ecs-electronics.com Email-technical: ts-uk@ecs-electronics.com Revision: 3 /19.03.2020 MZ-156-13U 5

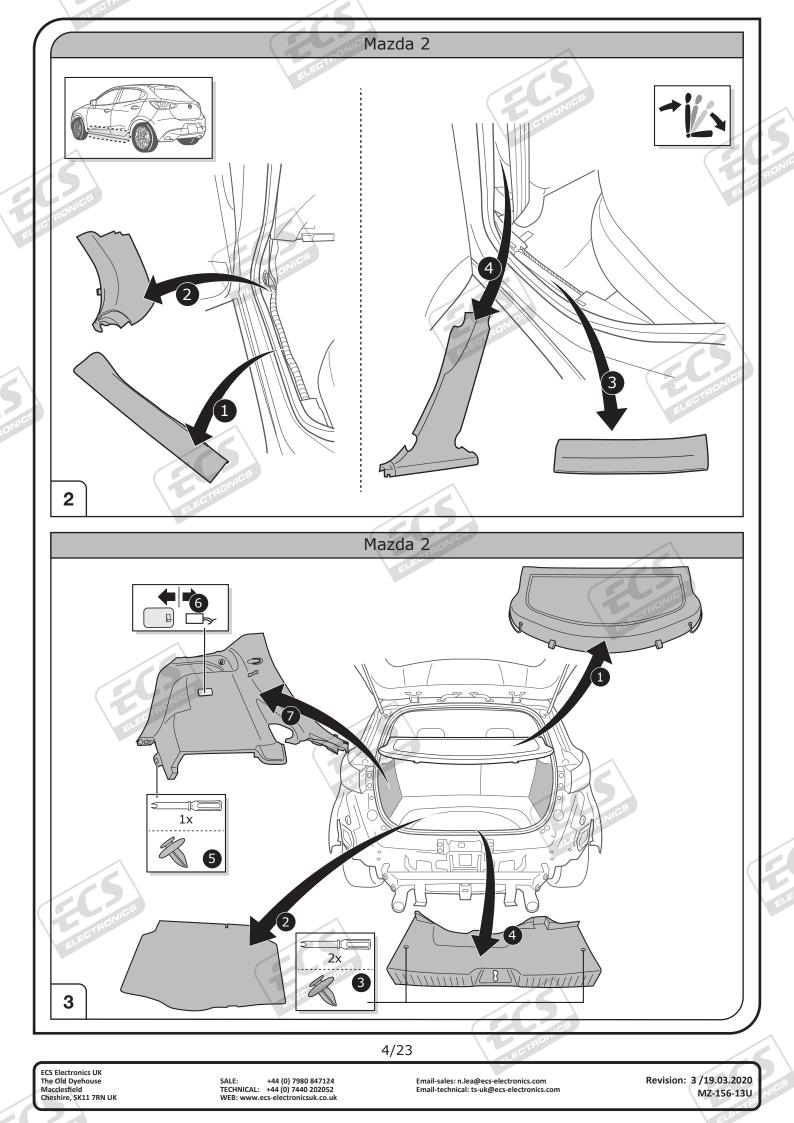

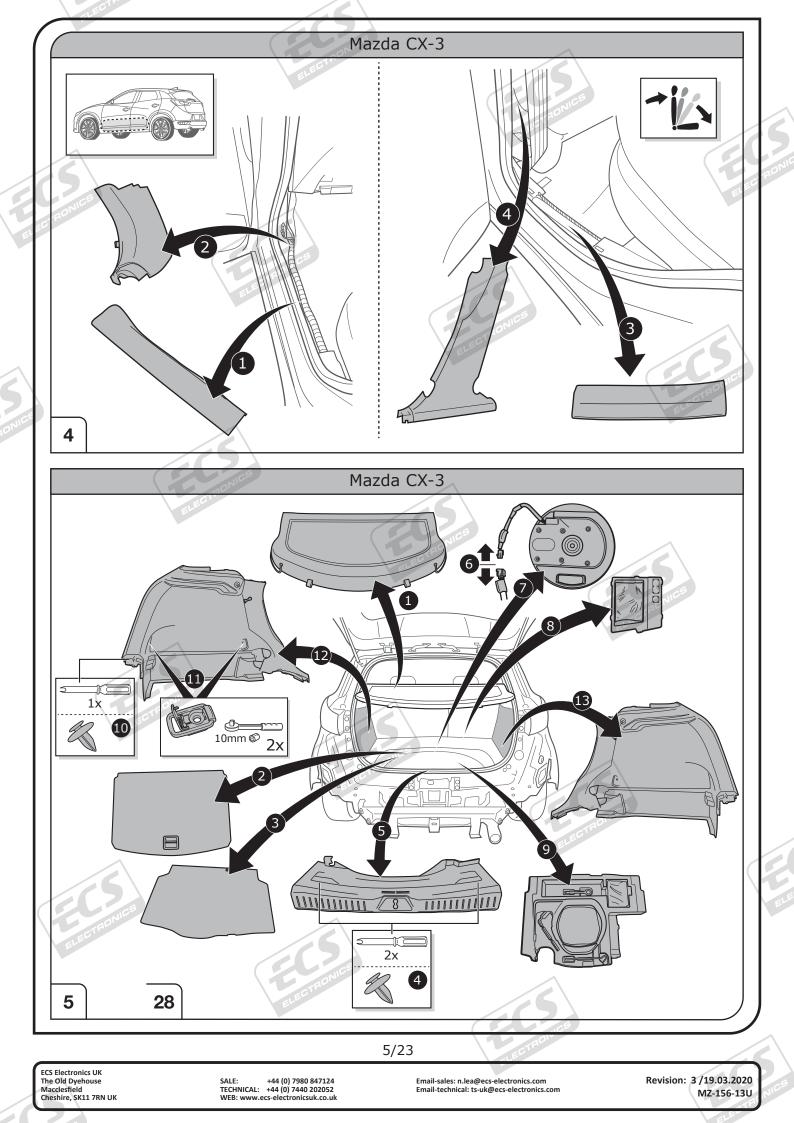

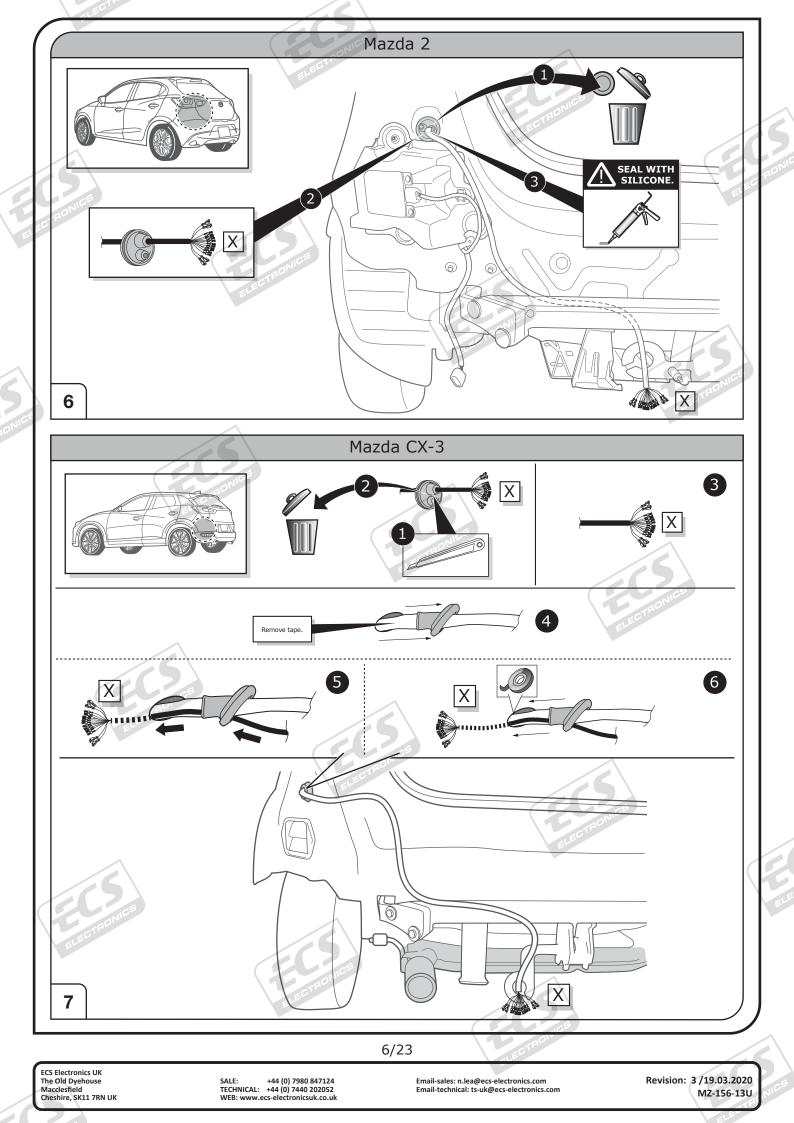

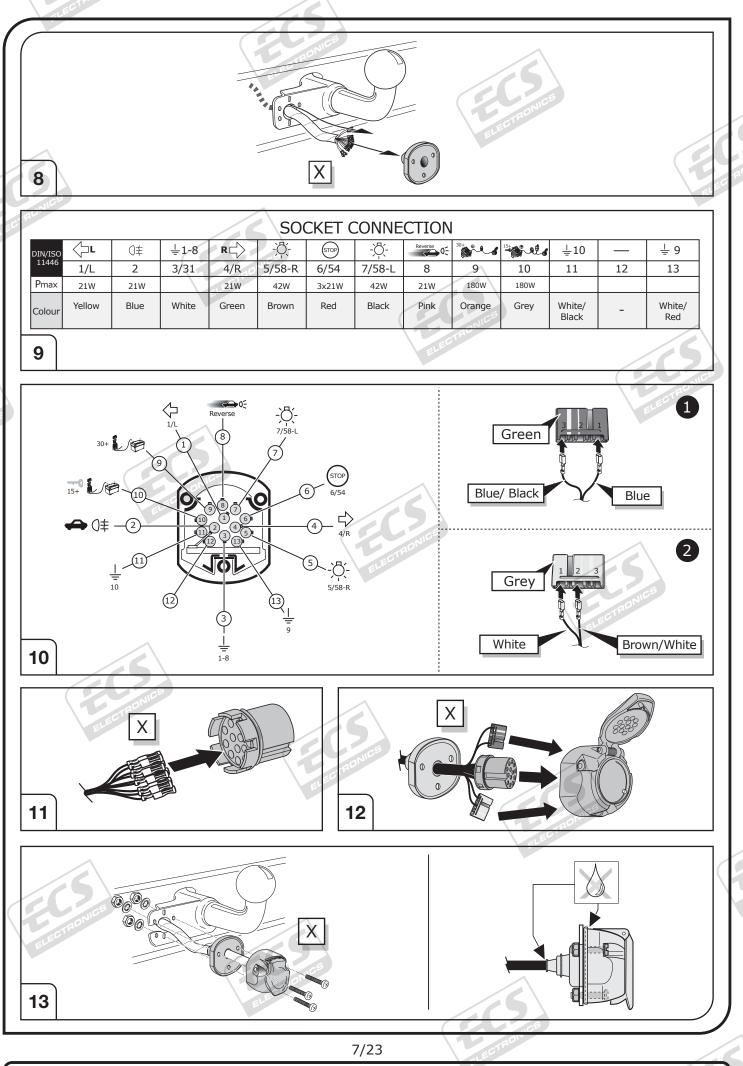

ECS Electronics UK The Old Dyehouse Macclesfield Cheshire, SK11 7RN UK

SALE: +44 (0) 7980 847124 TECHNICAL: +44 (0) 7440 202052 WEB: www.ecs-electronicsuk.co.uk Email-sales: n.lea@ecs-electronics.com Email-technical: ts-uk@ecs-electronics.com Revision: 3 /19.03.2020 MZ-156-13U

