

WTAB-BGE

GRAPHIC WEIGHBRIDGE INDICATOR

LAUMAS®



Integrated thermal printer
(on request)



6 D-SUB connectors - IP40



MULTILINGUE
SOFTWARE

DESCRIPTION

- ABS desk weight indicator.
- Dimensions: 315x170x315 mm.
- Backlit LCD graphic display, resolution: 240x64 pixel, visible area: 133x39 mm.
- 52-key keyboard.
- IP40 protection rating.
- Real-time clock/calendar with buffer battery.
- Power supply included.
- Rechargeable battery (option on request).
- Multilanguage software (4 languages + 1 customizable).
- D-SUB connectors.

INPUTS/OUTPUTS AND COMMUNICATION

- 1 Ethernet TCP/IP port.
- 2 USB ports for connection to external keyboard, barcode reader or pendrive (included).
- 4 serial ports (2x RS485 and 2x RS232) for communication via protocols ModBus RTU, ASCII Laumas bidirectional or continuous one way transmission.
- 5 relay outputs controlled by the setpoint values or via protocols.
- 3 optoisolated PNP digital inputs: status reading via serial communication protocols.
- 1 load cell dedicated input.

MAIN FUNCTIONS

- Connections to:
 - PC/PLC via RS485/RS232 (up to 99 instruments with line repeaters, up to 32 without line repeaters);
 - remote display and printer via RS485/RS232;
 - up to 8 load cells, 350 Ω, (or 16 load cells, 700 Ω) in parallel by junction box;
 - intelligent junction box or other multichannel instruments: allow the use of advanced functions as digital equalization, load distribution analysis and automatic diagnostics.
- Double weighing (entry and exit), single weighing (entry or exit), double weighing with trailer, single weighing with trailer, multiple weighing (weighing of multi-compartment trucks).
- Simultaneous management of 254 trucks.
- Open input weighings archive (max 254).
- Database with 500 vehicles (license plates, preset tares), products, customers and operators.
- Up to 10000 weighings that can be saved in alibi memory.
- Remote display with traffic light function managed via RS485/RS232.
- Traffic light management via relay outputs.
- Totals management (loaded and unloaded products).
- Barcode reader management with printing and open weighing ID recall.
- Data transfer to USB pendrive (included).
- Printing of displayed weight, open weighings, totals, and last weighing done.
- Customizable printouts (header and footer) via PC software.
- Digital filter to reduce the effects of weight oscillation.
- Theoretical calibration (via keyboard) and real calibration (with sample weights and the possibility of weight linearization up to 5 points).
- Tare weight zero setting.
- Automatic zero setting at power-on.
- Gross weight zero tracking.
- Semi-automatic tare (net/gross weight) and preset tare.
- Semi-automatic zero.
- Direct connection between RS485 and RS232 without converter.



Stabilized power supply included
24 VDC/1 A - 100÷240 VAC input
3 m cable length

CERTIFICATIONS



OIML R76:2006, class III, 3x10000 divisions, 0.2 μ V/VSI



UL Recognized component - Complies with the United States and Canada standards



Complies with the Eurasian Custom Union standards

CERTIFICATIONS ON REQUEST



NMI Trade Approved - Complies with the Australian standards for legal use with third parties



Complies with the regulations of the Russian Federation for legal use with third parties

TECHNICAL FEATURES

Power supply and consumption	12÷24 VDC \pm 10%; 6 W	
Number of load cells • Load cells supply	up to 8 (350 Ω) or 16 (700 Ω) - 4/6 wires • 5 VDC/120 mA	
Linearity	<0.01% full scale	
Thermal drift	<0.0005% full scale/°C	
A/D Converter	24 bit (16000000 points) - 4.8 kHz	
Divisions (with measurement range \pm 10 mV and sensitivity 2 mV/V)	\pm 999999 • 0.01 μ V/d	
Measurement range	\pm 39 mV	
Usable load cells sensitivity	\pm 7 mV/V	
Conversions per second	300/s	
Display range	\pm 999999	
Decimals • Display increments	0 ÷ 4 • x1 x2 x5 x10 x20 x50 x100	
Digital filter • Readings per second	10 levels • 5 ÷ 300 Hz	
Relay outputs	5 - max 115 VAC/150 mA	
Optoisolated digital inputs	3 - 5 ÷ 24 VDC PNP	
Serial ports	2x RS485, 2x RS232	
Baud rate	2400, 4800, 9600, 19200, 38400, 115200 (bit/s)	
Humidity (condensate free)	85%	
Storage temperature	-30 °C +80 °C	
Working temperature	-20 °C +60 °C	
	Relay outputs	5 - max 30 VAC, 60 VDC/150 mA
	Working temperature	-20 °C +50 °C
	Equipment to be powered by 12-24 VDC LPS or Class 2 power source	

METROLOGICAL SPECIFICATIONS OF TYPE-APPROVED INSTRUMENTS

Applied standards	2014/31/UE - EN45501:2015 - OIML R76:2006
Operation modes	single interval, multi-interval, multiple range
Accuracy class	III or IIII
Maximum number of scale verification divisions	10000 (class III); 1000 (class IIII)
Minimum input signal for scale verification division	0.2 μ V/VSI
Working temperature	-10 °C +40 °C

WTAB-BGE

GRAPHIC WEIGHBRIDGE INDICATOR

INTELLIGENT JUNCTION BOXES

The weight indicator displays the intelligent junction box functions.


Example:

1C	9.7
2C	13.8
3C	14.9
4C	8.7
5C	20.3
6C	32.5
7C	Err
8C	OFF

Load percentage on each active channel

ERROR: connection problem

OFF: channel not active

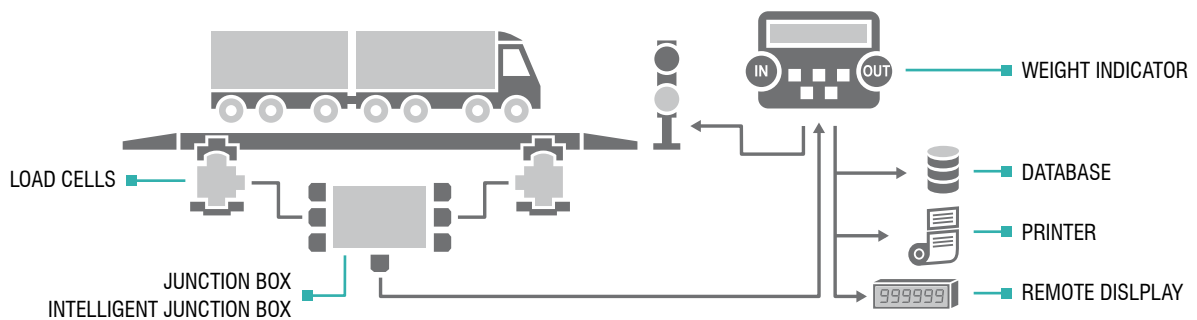

PRINTER

Supported external printers:
Epson TM-U295
Epson LX300
Custom Kube II
Laumas STAVT II
Other models on request.

Integrated thermal printer

CUSTOMIZABLE PRINTOUT

Printout example refers to the integrated printer.

CUSTOMIZABLE HEADER AND FOOTER

24/01/13 10:37:03
PRINTOUT NUMBER 21
CODE 4
26000 kg

DATABASE






The database allows to associate a vehicle (license plate and preset tare) to a customer identification code (ID) and to weighing data.

REMOTE DISPLAY

Remote display with traffic light function managed via serial port.

Epson name is the exclusive property of Seiko Epson Corporation; "Custom" name is the exclusive property of Custom Group SpA

OPTIONS ON REQUEST

	DESCRIPTION	CODE
	12.2 V rechargeable lead battery, 2.2 Ah capacity, supplied already installed inside the battery compartment accessible from the outside. Operating time: 13 hours.	OPZWBATTWTAB
	Integrated thermal printer: 24 column, paper end sensor, working temperature: 0÷50 °C, humidity: 20%÷80%, paper roll included (width: 57 ±0.5 mm - outside diameter: 50 mm). → One RS485 port not available.	OPZWSTABSTA
	Thermal paper roll.	CARTASTAVT
	Adhesive thermal paper roll.	CARTAFISCADEN
	Alibi memory.	OPZWALIBI