






# Double Gate Components

www.SafetyRailSource.com



## Double Gate - Galvanised - SGDBPEUGV / SGDBPNAGV

Spring Loaded, self-closing safety gate. Manufactured from steel to EN 10255. 33.7mm diameter tube x 3.2mm wall thickness to meet requirements of EN 13374 & EN 14122. Specify SGDBPEUGV to include European fixing pack or SGDBPNAGV for NA fixing pack. Material : Galvanised steel to BS EN ISO 1461 ASTM A53. Net weight : 25kg (55lb 12oz).

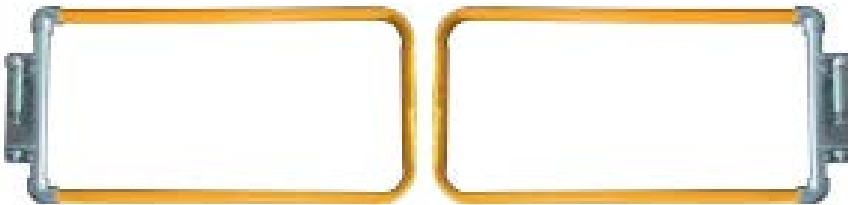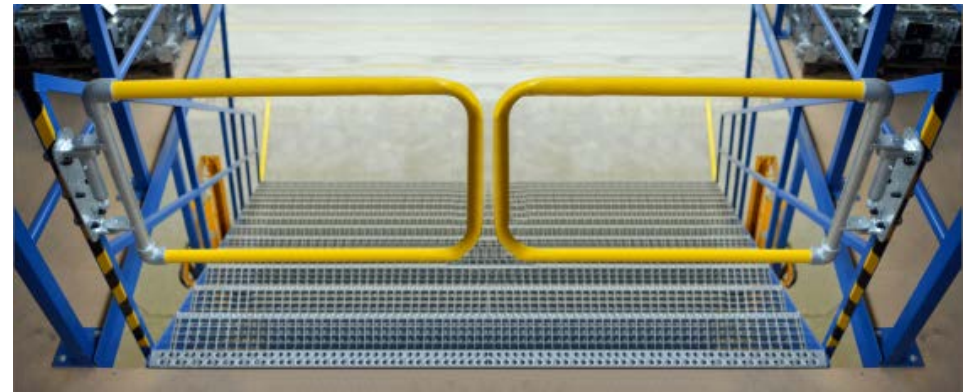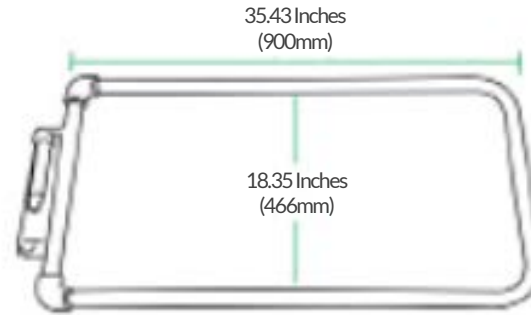

## Double Gate - Powder Coated - SGDBPEUPC / SGDBPNAPC

Spring Loaded, self-closing safety gate. Manufactured from steel to EN 10255 33.7mm diameter tube x 3.2mm wall thickness to meet requirements of EN 13374 & EN 14122. Complete with fixing pack. Powder Coated Finish to EN 13438. Specify SGDBPEUPC to include European fixing pack or SGDBPNAPC for NA fixing pack. Material : Steel to EN 10255. Net weight : 25kg (55lb 12oz).



## SAFETY GATE EUROPEAN FIXING PACK 1 - SGEUFXPK2

Supplied for the European market to fit posts 33.7mm, 42.4mm and 48.3 mm diameter. Fixing pack contains 3No. U Bolts for each size complete with M8 and M10 nuts and washers. Material : Galvanised steel to BS EN ISO 1461. Net weight : 1.30kg (2lb 14oz).



## SAFETY GATE NORTH AMERICAN FIXING PACK 1 - SGNAFXPK2

Supplied for the North American market to fit posts 1.0", 1.25" and 1.5" diameter. Fixing pack contains 3No. U Bolts for each size complete with 0.3125" and 0.375" nuts and washers. Material : Galvanised steel to ASTM A53. Net weight : 2.16kg (4lb 12oz).