

liner
world
.com

**Tube Frame Pool
Relining Kit Installation
Instruction Manual**




WARNING: DO NOT install before reading! Your pool must meet all of these qualifications or this kit will not work for you.

Read the following information and instructions before attempting installation.

This re-lining kit will only work on your tube frame pool if:

1. Your original liner must remain in place to act as your pool walls.
2. The hole in your original liner cannot be larger than a golf ball. If your original liner has major damage or large holes, the water pressure will cause your new liner to 'bulge' through your old liner and will eventually burst.
3. The tubes along the top edge of your frame must be completely round (not oval, oblong, or flat-topped) and must be 1-1/2" – 1-1/4" in size.

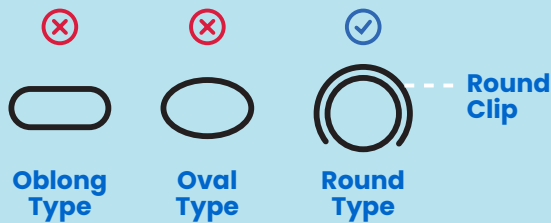

If your tube frame pool does not meet all above qualifications, this kit will not work for you.

Please follow all enclosed instructions during installation – installing this liner other than instructed will result in a void of warranty.




Other Tips & Tricks to Note

- Do not schedule the project immediately before a pool party, as any minor delay will cause a disruption in your plans
- Plan installation around dry, hot weather
- If you hire a professional, it is your responsibility to make sure they install per our instructions provided
- Maintain your pool water – once a pool liner holds water for several days, it is very likely it will hold water for many years if properly maintained. If the pool begins to lose water after several days of holding water, it is likely due to improper use, abuse, poor maintenance, poor water chemistry, or act of God.
- Understand the most important aspect of your pool is SAFETY. It is your responsibility to ensure your pool meets all National, State, and Local building codes and safety requirements.
- Do not use a water truck – if you must, fill as slow as possible
- Never completely drain your pool unless changing the liner
- Do not scrub your liner with a pool vac or brush
- Always use a ladder pad under your stairs and ladders
- Always use liquid chlorine – no powder when applied directly to pool
- Always have a pool liner patch kit on hand & goggles




1

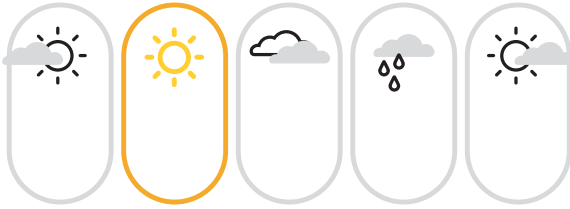


Choose a warm day with no rain or clouds. This is very important. When it is warm and sunny, the liner fits into place with ease.

2

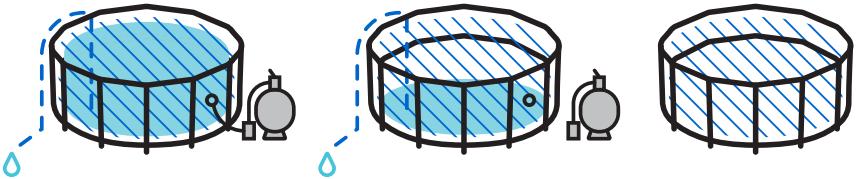


Completely drain your pool and uninstall skimmer box and pump connections, leaving only the liner and your frame. Remove any dirt or debris that may be left after draining.

3

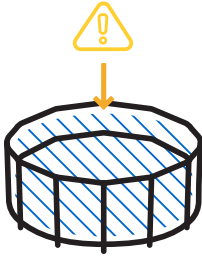


Make sure to leave your existing liner in place, connected to your frame – your old liner will act as your pool walls. If you do not have the old liner in place, you will not be able to use this kit.

4

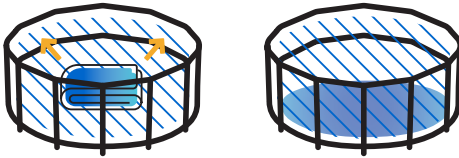


Unfold the liner and center in the middle of the pool. Evenly spread out, keeping the liner centered.

5

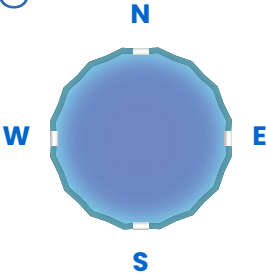


Using the tube clips provided in your kit, attach 4 points of the liner to your tube frame using one clip on each direction point (North, South, East, West). This will ensure your liner is perfectly even all the way around. If you start with one point and start attaching the liner by working your way around the pool, your liner will not be straight and may seem short or too small for the pool.

6

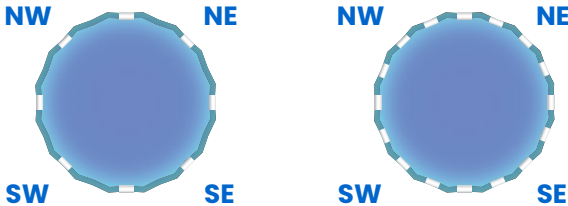


Once your liner has 4 direction points attached to your frame, add 4 more in between those points and attach using one clip per point (Northwest, Northeast, Southwest, Southeast). You may now attach the remaining liner to your frame using the rest of the clips, all the way around the pool.

7 (Optional for best results)

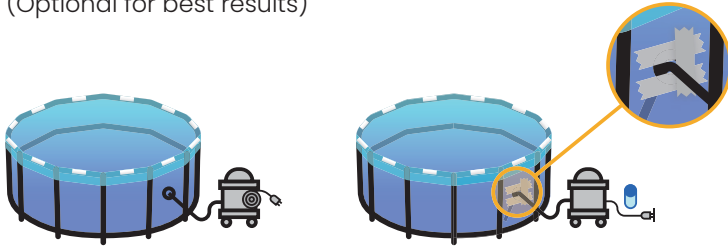

Once your liner is completely attached to your frame over your existing liner, add your shop vac hose to the open skimmer hole and push down near the base of your pool. Then duct tape the open space at the skimmer and pump/return jet holes for an air-tight seal. Plug the vac into a safe (GFCI) outlet. When you turn the vac on, if there are any wrinkles or desired adjustments with the liner, manipulate them by hand before filling.

8

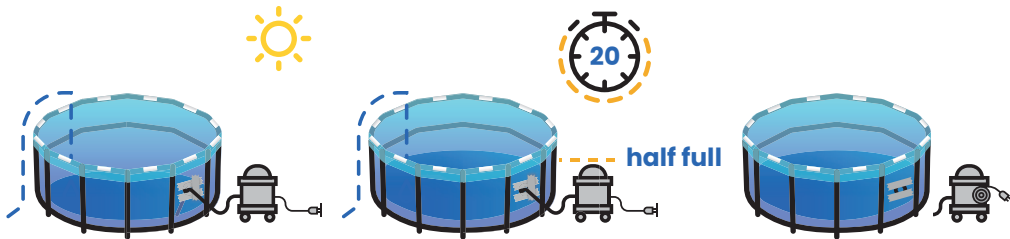


As the vac runs and the liner is adjusted to your likeness, you can start filling the pool with water. As it fills, pull the vac hose up a little bit at a time so the hose stays above water level in the pool. When the water reaches the half-way point, eliminate the vac by pulling the hose out of the pool wall.

If you're not using a shop vac, once the liner is adjusted to your likeness, fill pool to half-way.

Important:


Check filling process every 20 minutes until the pool is half way full.

9

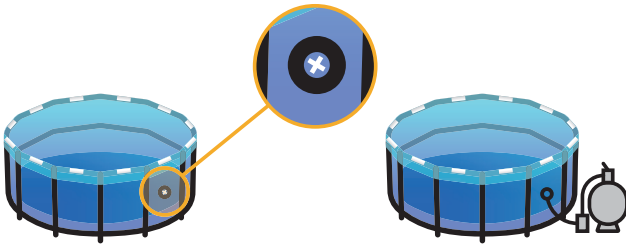

Cut a small hole or X to mark where your pump hose, return jet, and skimmer go on the new liner and carefully install your equipment through your old and new liner.

10

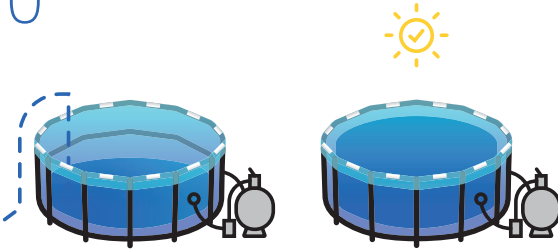

Once your equipment is re-installed through both liners, you may continue filling the pool until full.

We hope you enjoy your pool!

-The LinerWorld Team



Please see the following pages for returns and warranty information.
For other questions and support please contact:

linerworld.com
support@linerworld.com
(708) 489-9932



Returns Information

Returning a product at LinerWorld is simple! Just contact one of our representatives at support@linerworld.com or by calling **708-489-9932**.

To qualify for a return:

- You must get authorization before making a return to guarantee a replacement/refund. Return address and proper return instructions will be given upon approval of return.
- The return MUST be initiated within 30 days of receiving your order.
- All returns must have the order number written on the box.
- Pool liners that have been opened and unrolled are NOT eligible for return or refund.
- Special orders and custom-made items are NOT eligible for return or refund.
- The product must be returned in its original condition, including original packaging, manufacturer's containers, documentation, warranty cards, manuals, and accessories.
- Pool Liners are subject to a \$20 restocking fee, all other items are subject to a \$10 restocking fee.
- All costs related to return shipping must be paid by the customer.

Contact us today to initiate your return! Please do not send any items back without contacting us first, or your refund processing time may be delayed.

Pool Liner Warranty

Having an issue with your pool liner? We are here to help! Give us a call at **708-489-9932** or email support at **support@linerworld.com**.

LinerWorld warrants this above ground pool liner at the time of purchase, for 25 years, or the lifetime of the swimming pool (whichever comes first) to be free from defects in workmanship. LinerWorld reserves the sole right to decide if a liner is covered under warranty with respect to the below terms, conditions, and replacement costs.

The liner should be carefully inspected prior to installation. LinerWorld is not responsible for rips or punctures or seam tears due to mishandling or improper installation. It is the buyer's responsibility to complete a thorough inspection before installing the liner.

Tears, rips, punctures, abuse, and seasonal damages are not covered under the warranty. The following prorated replacement schedule constitutes a charge correlating to the suggested manufacturers retail price.

Successful claims are executed by the replacement of a pool liner only. If the same product is not available when processing a claim, a comparable product will be substituted. All warranties must be approved by our warranty department.

To process a warranty claim please contact us at **support@linerworld.com** with a photo of the suspected defect, along with your order and contact information.

Purchaser is responsible for all installation or re-installation costs for any liner repaired or replaced. The liner must be installed according to the instructions. LinerWorld is not responsible for any damage caused by faulty installation or inspection. This warranty is void if the pool water is emptied for any reason. The pool can be cleaned, no matter how dirty, with the proper filtration and water chemistry. LinerWorld and any affiliated dealer, is not responsible for chemicals, water loss, re-installation and/or labor costs and/or any inconvenience cost.



linerworld.com
support@linerworld.com
(708) 489-9932