

06 Downlights Fixed LED>The Frameless IP65 Range

## 10115CF/W



15W LED frameless downlight, IP65. Suitable for Indoor/Outdoor installation and bathroom.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

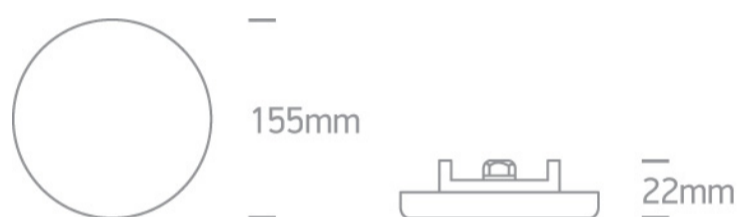

Gallery



Related items



050146/B



050146/W

Physical Specification

Item Group



06 Downlights Fixed LED

Family



The Frameless IP65 Range

Order Code	10115CF/W
Colour	White
Material	Die Cast
Diffuser Material	PC
Shape	Circular
Height	22mm
Diameter	155mm
Cutout Hole Diameter	135mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

#### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current

Input Current	500mA
Voltage	22,5V
Safety Class	
Power(Watts)	11,25W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Zhaochi
F Mark	

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,5-12W
Power Factor	0,9
Constant Current	Yes
500mA	17-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu

## Illumination Data

Colour Temperature	3000K
Lumen Output	1200lm
Light Efficiency	80lm/W
CRI	80

Beam Angle

120°

Illumination Diagram



## Packing Info

Box Length

21cm

Box Width

19,5cm

Box Height

3cm

Box Weight

0,46Kg

Pcs/Carton

20

Carton Length

43cm

Carton Width

37cm

Carton Height

22cm

Carton Weight

9,4Kg


Barcode

5291889057109

HS Code

9405409900

## Energy Label

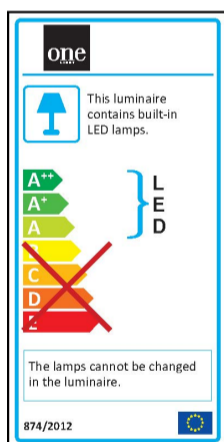

Warranty

5 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

