
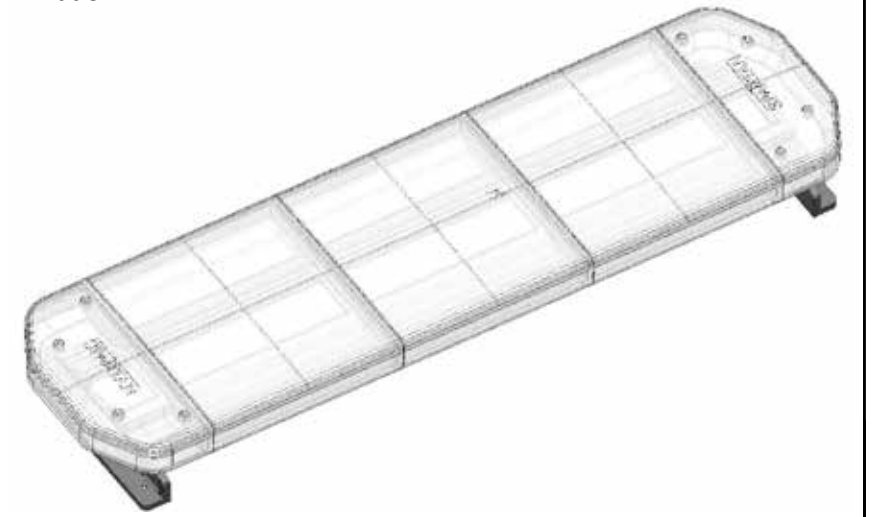
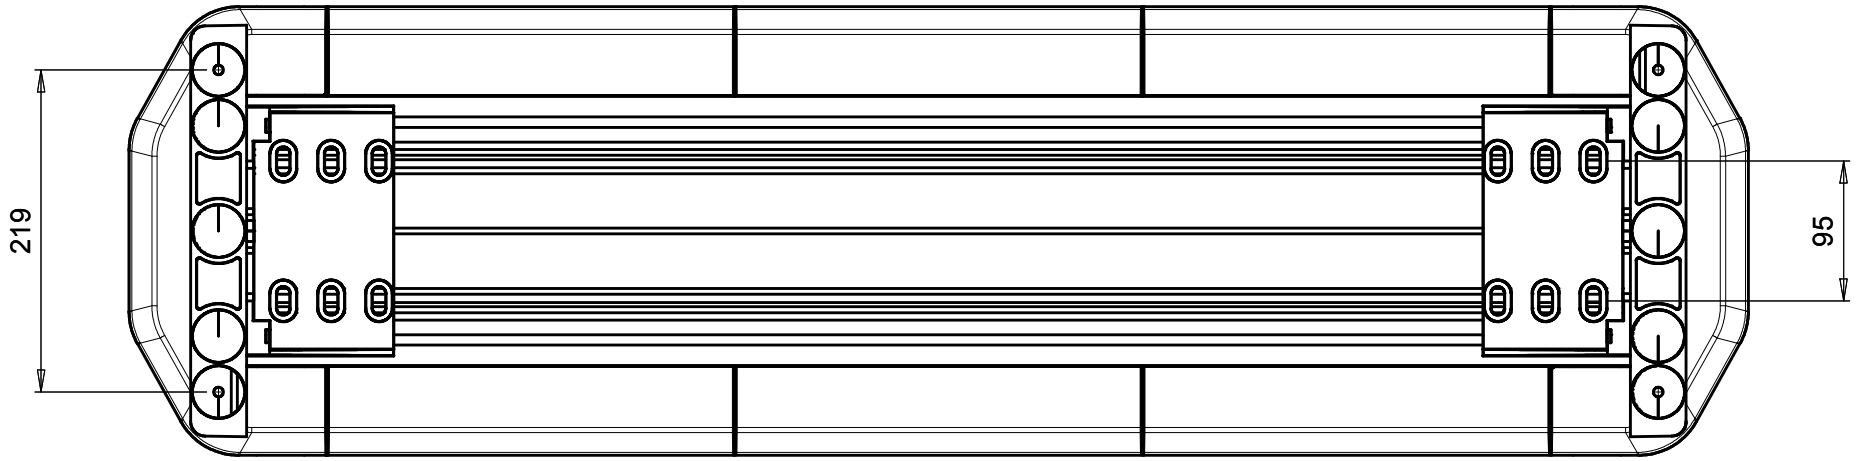


	FUNCTION	SUPPLY	TRIGGER
2mm	POWER & SIREN STANDBY	POSITIVE (+VE)	LATCHING
2mm	LIGHTS	POSITIVE (+VE)	LATCHING
1.28	SIREN TRIGGER	POSITIVE (+VE)	MOMENTARY
1.28	ALLEYS & FRONT SPOT	POSITIVE (+VE)	LATCHING
1.28	PATTERN SELECT	POSITIVE (+VE)	MOMENTARY
2mm	EARTH	NEGATIVE (-VE)	LATCHING

ADDITIONAL NOTES

"SIREN STANDBY" TO HAVE A PERMANENT POSITIVE FEED AND THEREFORE ALWAYS BE IN STANDBY WHEN CONNECTED TO 12V (SO THE BULLHORN CAN BE POWERED AT ANY TIME).

Siren dipswitch set to 2 & 6 on (only) to provide the following:
 "WAIL" - "YELP" - "HI/LO" - "OFF" (Dipswitch 2)
 "BULLHORN" (Dipswitch 6)

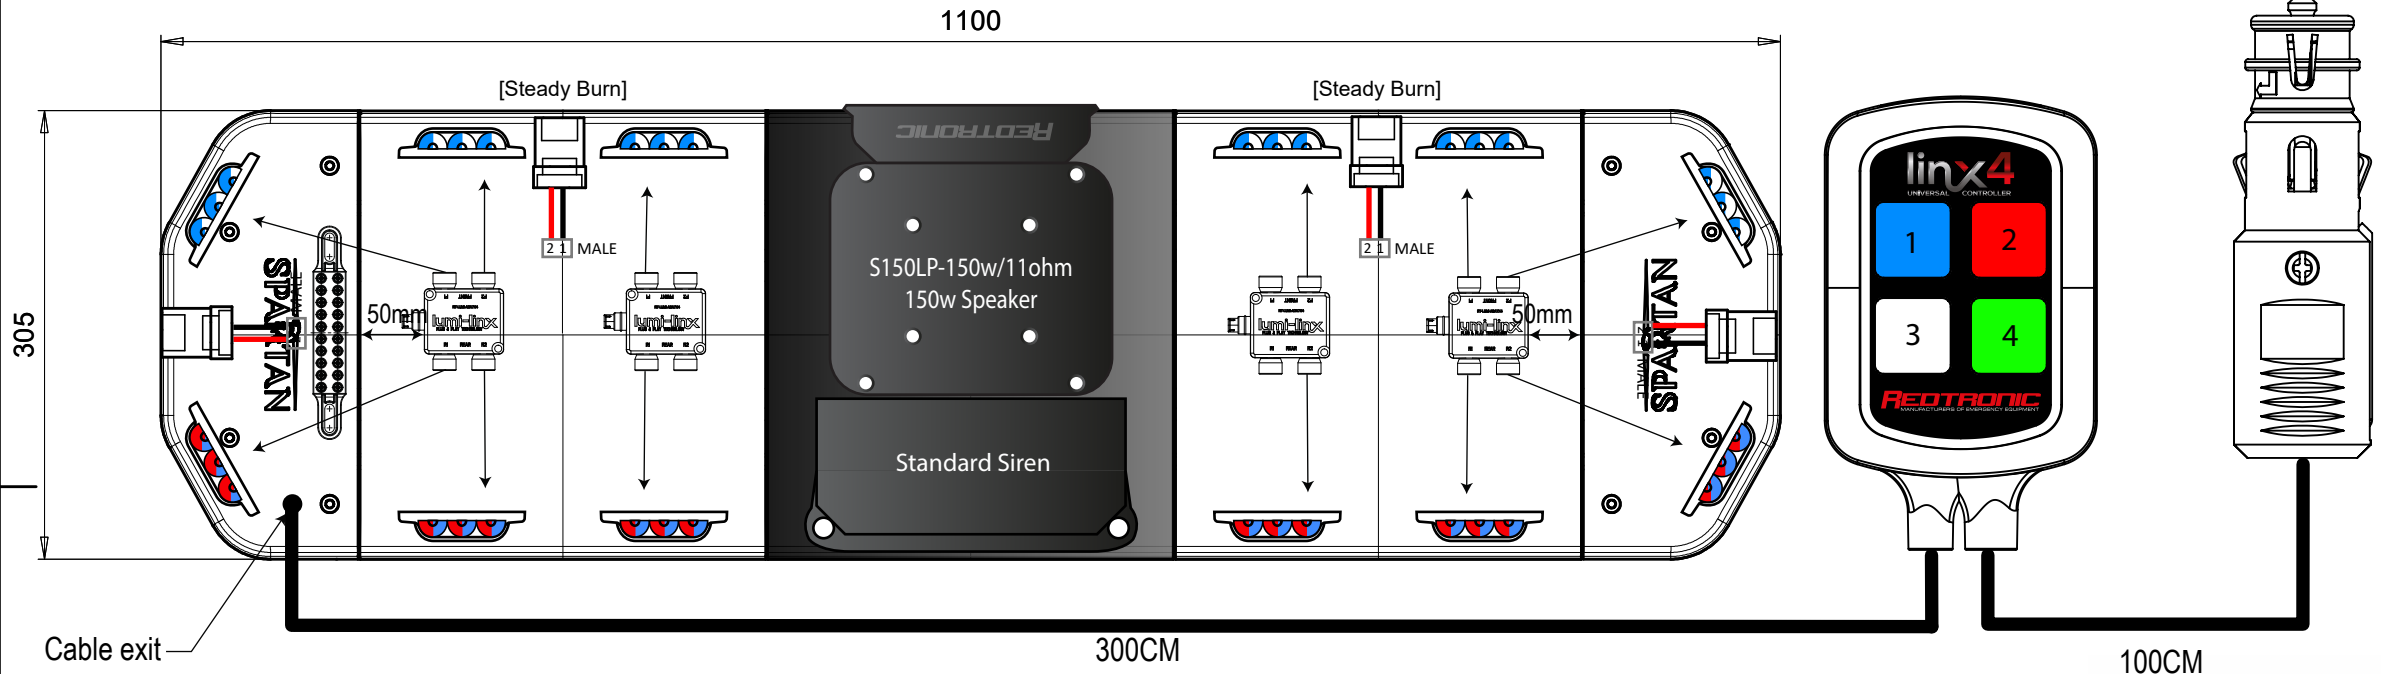

NAME	DATE	SB2110TBRWCC_ANUV2	
DRAWN BY	AR	14.01.2022	LV110 - SPARTAN
CABLE TYPE	3 metres (from exit)		
FIXING METHOD	Universal Footpack		
FLASH PATTERN	Double Alternate Flash		SIZE A3
LED Switch	BASE LENS Switch	TOP LENS Switch	REV.
LED Switch: ■ ■ ■ ■ ■ ■ ■ ■			DWG. No.
BASE LENS Switch: ■ ■ ■ ■			SCALE
TOP LENS Switch: ■ ■ ■ ■			SHEET 1 OF 1 SHEETS