


ELECTRIC SLIP ROLL MACHINE

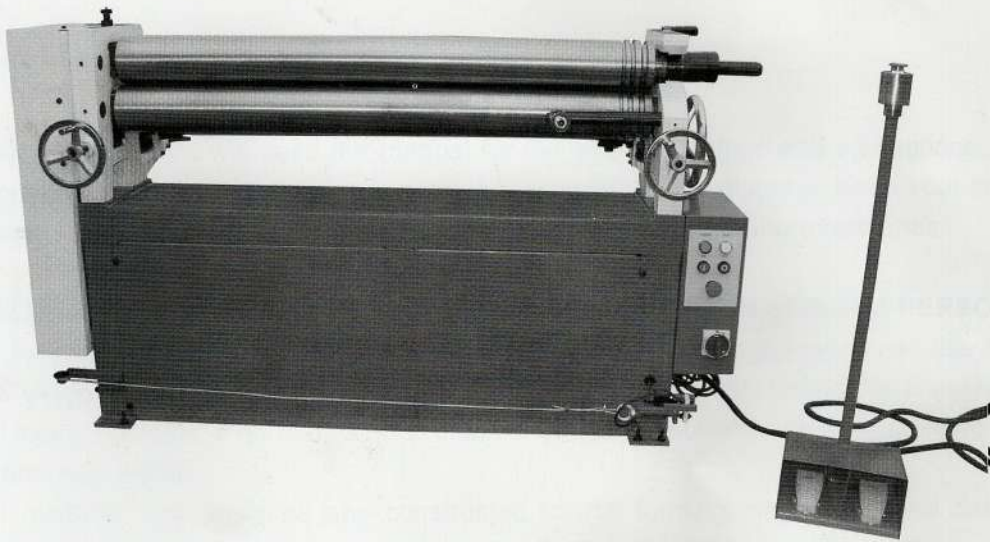

Model:

ESR-1300X2.5/ESR-1300X4.5
ESR-1300X6.5/ESR-1550X3.5
ESR-2020X3.0/ESR-2070X2.5
ESR-2070X3.5/ESR-2500X0.8

I. MAIN SPECIFICATION

MODEL	ESR-1300X2.5	ESR-1300X4.5	ESR-1550X3.5	ESR-2020X3.0
Max rolling width	1300mm	1300mm	1550mm	2020mm
Max rolling thickness	2.5mm	4.5mm	3.5mm	3.0mm
Rolling diameter	90mm	120mm	120mm	127mm
Rotate speed	22rpm	22rpm	22rpm	22rpm
Motor Power	1.5kW	2.2kW	2.2kW	4.0kW
Overall dimension	180x64x100cm	181x64x105cm	206x64x105cm	253x64x105cm
Weight	470kg	660kg	750kg	950kg

II. SAFETY INSTRUCTIONS

Save this manual: You will need the manual for the safety warnings and precautions, assembly instructions, operating and maintenance procedures, parts list and diagram. Keep your invoice with this manual. Keep the manual and invoice in a safe and dry place for future reference.

WARNING: FAILURE TO FOLLOW THESE RULES MAY RESULT IN SERIOUS PERSONAL INJURY As with all machinery there are certain hazards involved with operation and use of the machine. Using the machine with respect and caution will considerably lessen the possibility of personal injury. However, if normal safety precautions are overlooked or ignored, personal injury to the operator may result.

This machine was designed and constructed for roll forming metal plate and some similar material. We strongly recommend that this machine SHOULD NOT be modified and/or used for any application other than for which it was designed. If you have any questions about its application, do not use the machine until you contact with us and we have advised you.

Read all instructions before using this tool!

1. MACHINERY GENERAL SAFETY WARNINGS

- 1) Misuse of this machine can cause serious injury. For safety, machine must be set up, used and serviced properly. Read, understand and follow instructions in the operator's and parts manual which will be shipped with your machine.
- 2) Wear proper apparel. No loose clothing or jewelry which can get caught in moving parts. Gloves and rubber soled footwear is recommended for best footing.
- 3) Do not overreach. Failure to maintain proper working position can cause you to fall into the machine or cause your clothing to get caught — pulling you into the machine.
- 4) Keep guards in place and in proper working order. Do not operate the machine with guards removed.
- 5) Avoid dangerous working environments. Do not use stationary machine tools in wet or damp locations. Keep work areas clean and well lighted

- 6) Avoid accidental starting. Make sure switch is in "OFF" position before plugging in power cord
- 7) Never leave the machine running while unattended. Machine shall be shut off whenever it is not in operation.
- 8) Disconnect electrical power before servicing. Whenever changing accessories or general maintenance is done on the machine, electrical power to the machine must be disconnected before work is done.
- 9) Machinery must be anchored to the floor.
- 10) Use the right tool. Know the tool you are using — its application, limitations, and potential hazards. Don't force a tool or attachment to do a job it was not designed for.
- 11) Stay alert Watch what you are doing; use common sense. Do not operate any tool when you are tired. Keep hands in sight and clear of all moving parts and rolling surfaces.
- 12) Keep children away. Children must never be allowed in the work area. Do not let them handle machines, tools, or extension cords.
- 13) All visitors should be kept at a safe distance from the work area. Make workshop completely safe by using padlocks, master switches, or by removing starter keys.
- 14) Store idle equipment. When not in use, tools must be stored in a dry location to inhibit rust. Always lock up tools and keep out of reach of children.
- 15) General Electrical Cautions: This machine should be grounded in accordance with the National Electrical Code and local codes and ordinances. This work should be done by a qualified electrician. The machine should be grounded to protect the user from electrical shock.

2. TRANSPORTATION (CRANE OR FORKLIFT ID RECOMMEND)

·Transportation before un-packing

1. The steel wire of crane should be capable of lifting weight over 2000 kgs.
2. The steel wire must be arranged properly as per cavity center of wooden box.
3. The crane (or forklift) operator should be a qualified & trained person.
4. Machine should be loaded at the cavity center of truck to avoid any sliding.
5. After loading onto truck, use steel wire to fix the machine body on truck and ensure to fasten it firmly before transportation.


3. POSITIONING & CLEANING

- Site : When select site, ensure there is free space for material handing around the machine.
- Foundation: The machine requires a plane & stable ground to have an excellent bending performance. It is better to fixed on 150mm reinforced concrete ground.
- Leveling: Four sheet shims are placed under the adjusting bolt of foot plate, the machine is leveled by level gauge.
- Cleaning: Use a liquid solvent such as kerosene or white spirit to remove the protective coating and any dirt from the up-painted surface of the machine. Don't disturb any moving parts until all surface has been cleaned.

4. ELECTRIC CONNECTION

- Before connecting machine into local 3-phase ac source at your plant, please double check same voltage and phase.
- Connect the ac source with machine cable which has 4 wires, correctly, the ground wire must to be connected with ground.
- After connecting ac source to shaft motor rotation is in the correct rotation direction as per the

2. PROCESS DRAWING OF ROLL FORMING

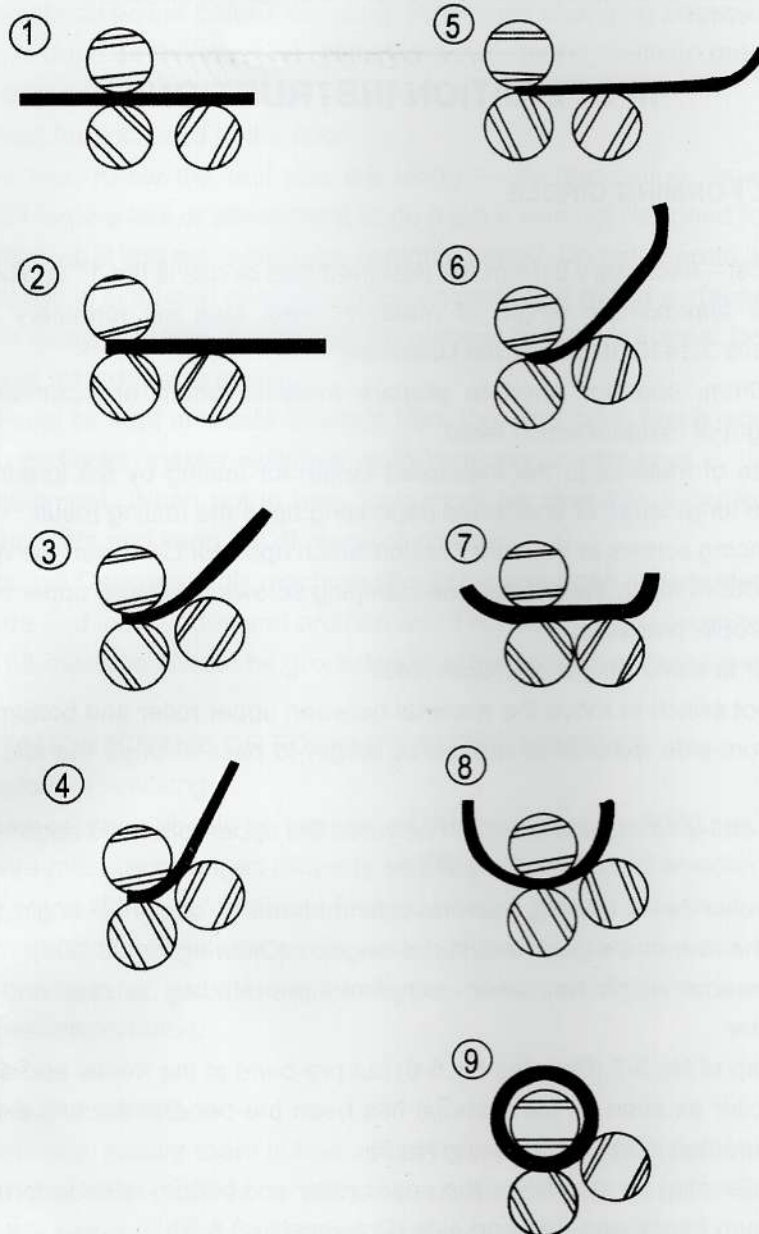


3. ADJUSTING THE CLAMPING (BOTTOM) ROLLER & PINCHING (IDLE) ROLLER

- 1) The adjusting handwheel mounted on the right-hand side frame of the machine construction can adjust the bottom roller to clamp material tightly.
- 2) The handwheel is mounted on right-hand side frame of machine construction enable the operator to raise or lower the idle (pinch) roll, so the correct gap between the upper and idle (pinch) rolls may be obtained to feed the designed stock into the machine.

4. REMOVE THE FORMED MATERIAL


Lift clamp handle and slide the support lever handle to the right. The pinch roll will rise. Slide the finished sample off the roll.

5. ILLUSTRATION / OPERATION OF CONE BENDING ATTACHMENT

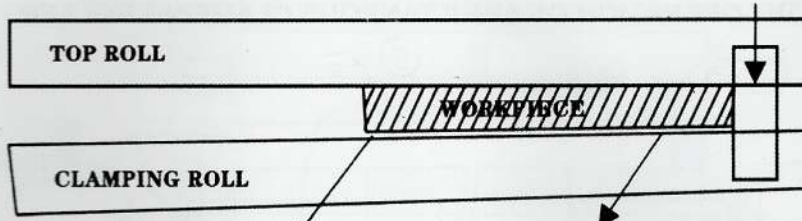

KEEP FREE SPACE AT THE LONG CIRCULE
SO THE OPERATOR CAN SLIDE THE SHORT
CIRCUIT OF WORKPIECE AGAINST THE CONE
BENDING ATTACHMENT



CLAMP THE WORKPIECE TIGHTLY AT THE
SHORT CIRCUIT

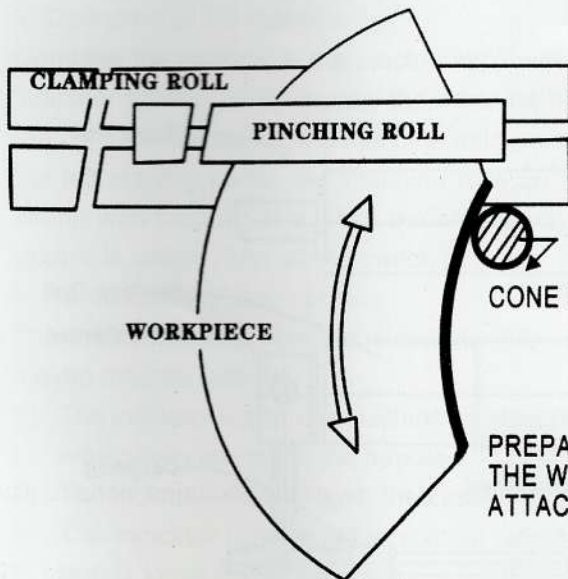


CONE BENDING ATTACHMENT

PREPARE THE CORRECT-SIZE WORKPIECE, SLIDE
THE WORKPIECE AGAINST THE CONE BENDING
ATTACHMENT AS THE ABOVE ILLUSTRATION.

6. ILLUSTRATION / OPERATION OF SIMULTANEOUS CLAMPING ROLLER

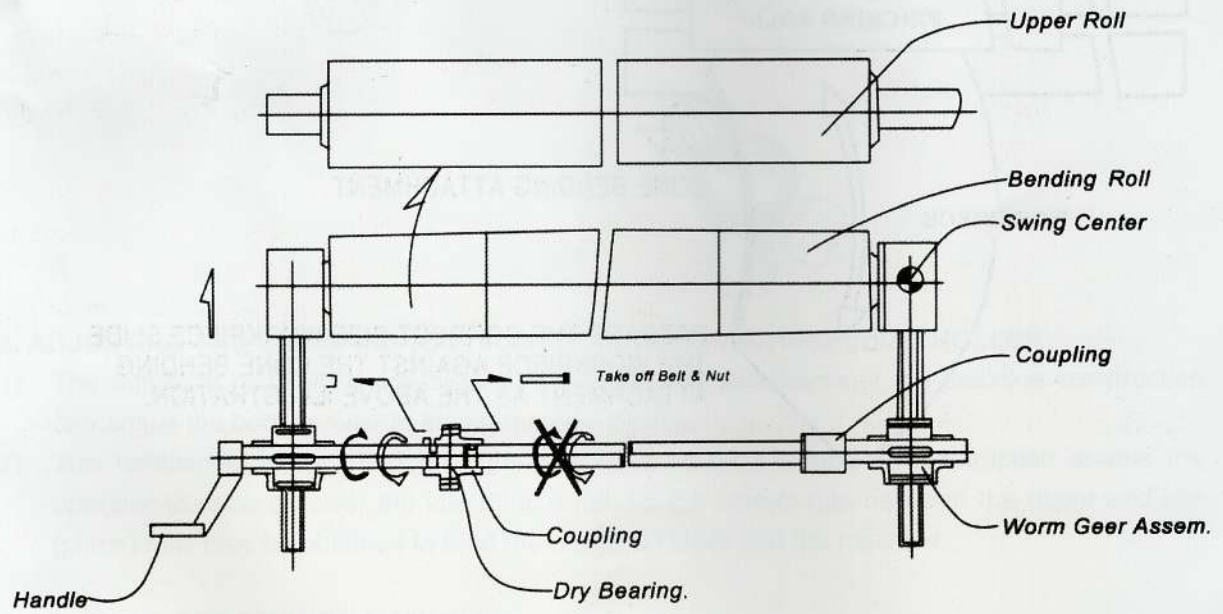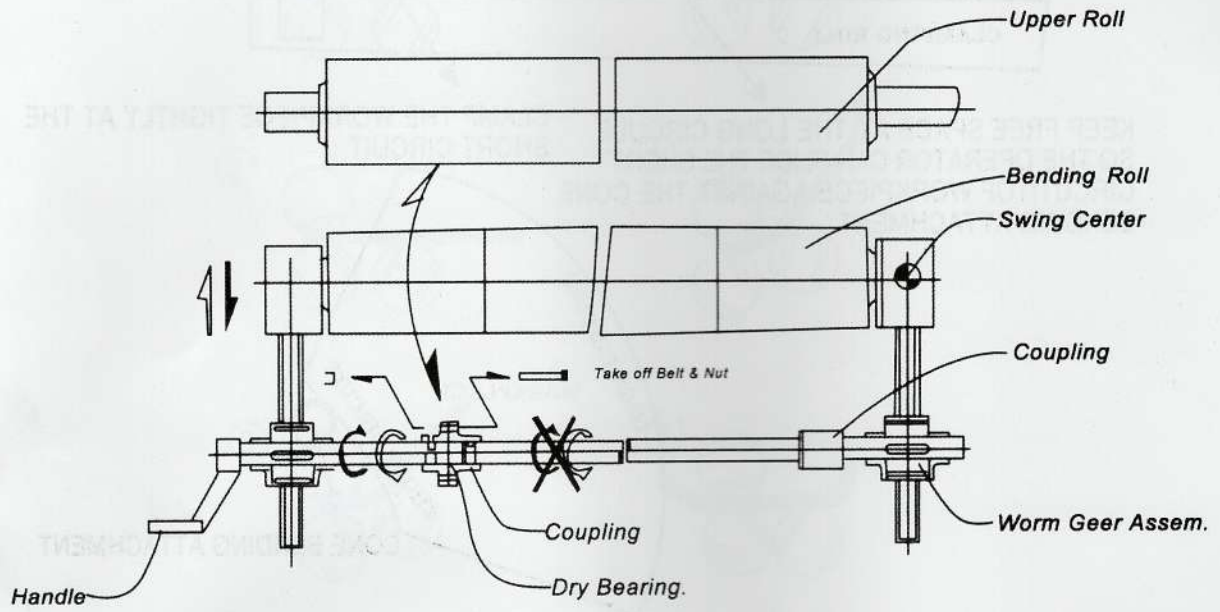

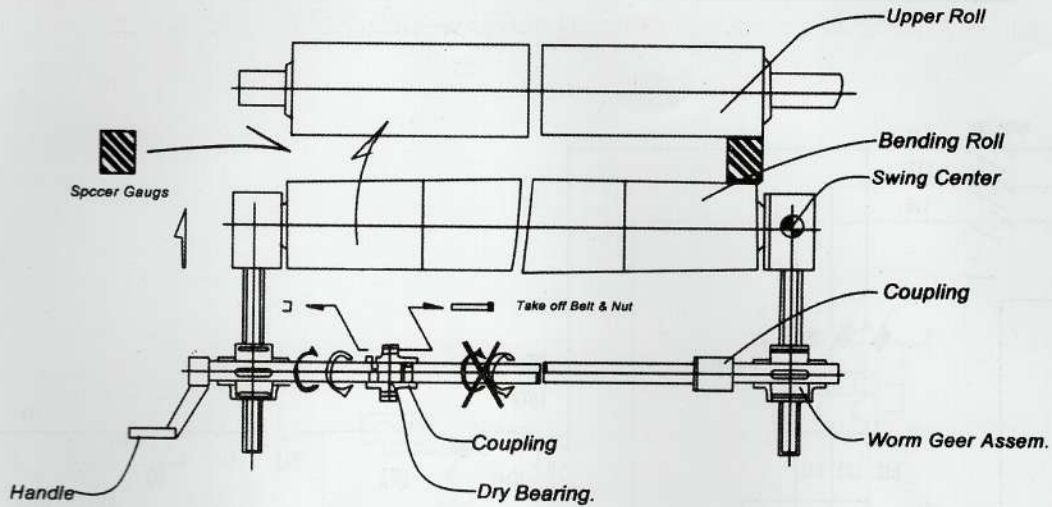

IV ELECTRIC SYSTEM

1, Preparation: The consumer should prepare a 10A power switch. Connect 3x4 mm² + 1x4mm² yellow/green with the power switch. The earth-line should be connected with the earth-plate.

2, Operation of the machine

Combine the breaker in the electric appliance box and turn right the power switch. At this time the indicator lighted, which means the machine had been connected with power correctly. Pedal down the right starting pedal, the machine rolls clockwise continuously until loosen the pedal. Pedal down the left starting pedal, the machine rolls on the contrary of the above direction. If there is some wrong with the machine, push the emergency switch on the handle to stop the machine. After the trouble is solved, turn off the switch to work.

3, Maintenance of the machine

The machine has a compact structure. It is easy to be operated and maintained. Some problems maybe exist as follows:


- 1) The indicator lights, the machine can't work when pedal down the starting pedal, then turn off the emergency switch on the handle.
- 2) The indicator doesn't light, then combine the breaker in the electric appliance box.
- 3) The indicator lights and the spindle works, but motor doesn't work, that means the connecting wire is loose or disconnected.

4, Electric principle drawing (refer to the attached drawing)

5, Main electric appliance list

Symbol	Name	Symbol	Name
LW	Power switch	EL	Indicator light
QF	Breaker	TA	Lash-up switch
TC	Transformer	M	Motor
KM	Alternating contactor		

V PARTS DRAWING AND PARTS LIST

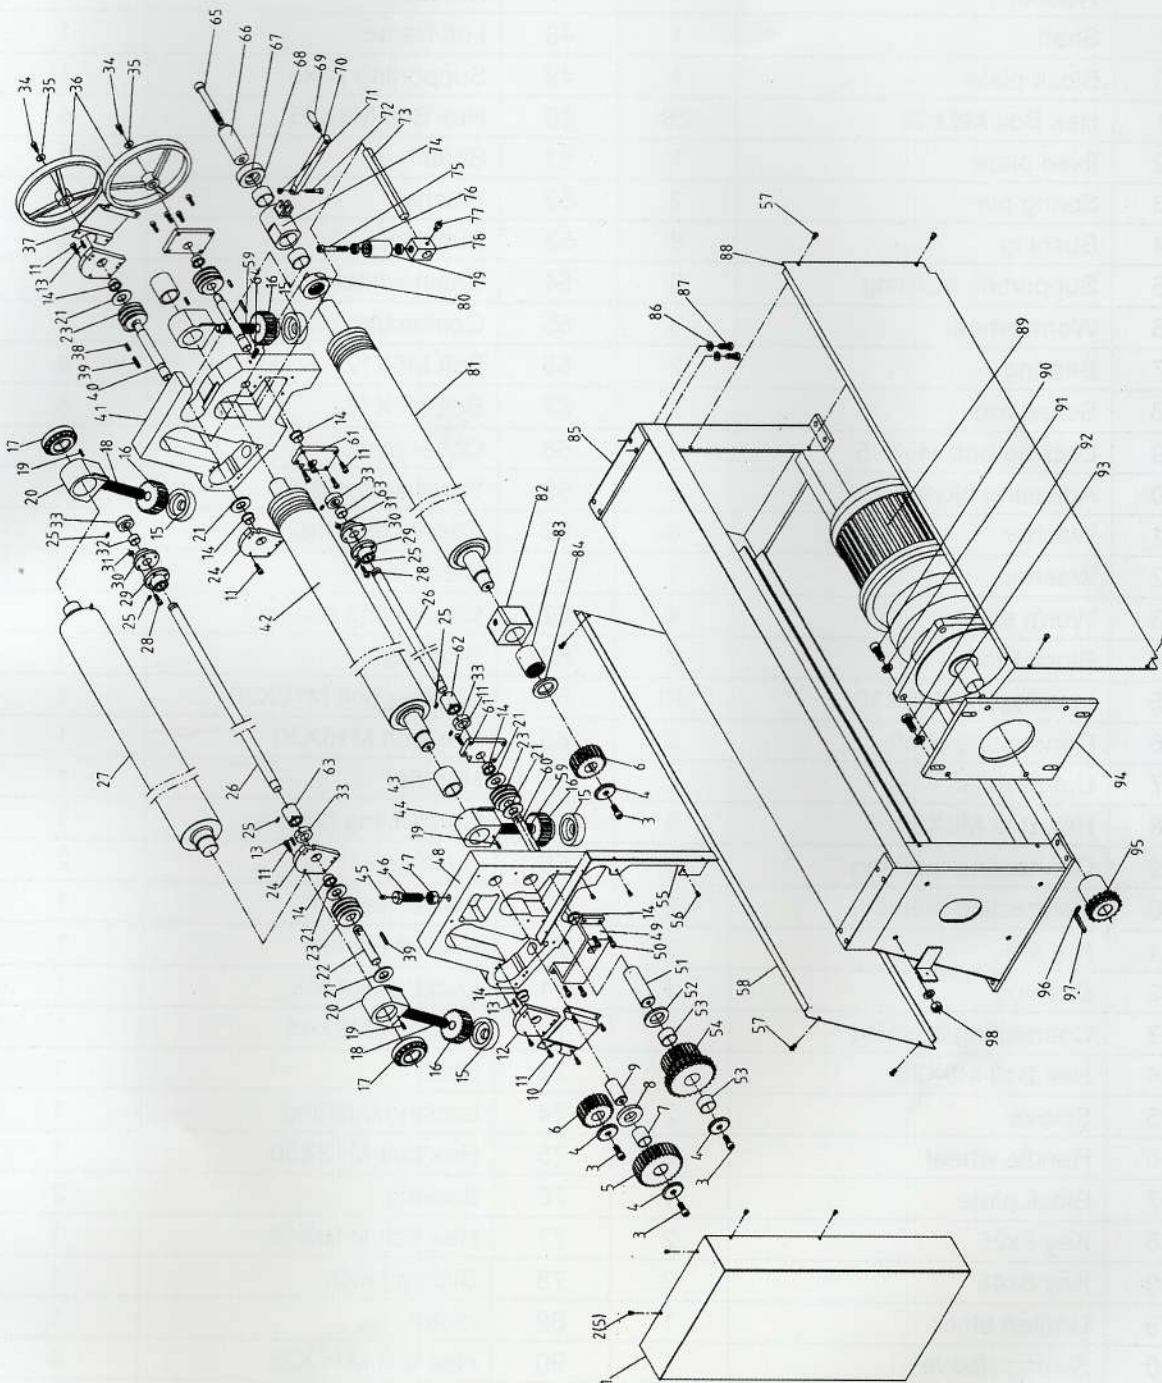

Packing List

Part #	Description	Q'ty	Part #	Description	Q'ty
1	Protecting Cover	1	40	Fixed Shaft	1
2	Hex Bolt M6X10	5	41	Right frame	1
3	Bolt M12X30	3	42	Pitch (idle) roller	1
4	Mat	3	43	Sleeve	2

5	Big gear	1	44	Adjusting block	2
6	Small gear	2	45	Oil cup	1
7	Bushing	1	46	Bolt	1
8	Washer	1	47	Nut M20	1
9	Shaft	1	48	Left frame	1
10	Block plate	1	49	Supporting plate	1
11	Hex Bolt M6X16	28	50	Hex Bolt M8X25	4
12	fixed plate	1	51	Shaft	1
13	Spring pin	2	52	Washer	1
14	Bushing	8	53	Bushing	2
15	Supporting bushing	3	54	Chain wheel	1
16	Worm wheel	3	55	Connecting plate	1
17	Bearing	2	56	Bolt M6X12	4
18	Screw rod	2	57	Bolt M8X16	8
19	Locking bolt M6X25	4	58	Cover plate	1
20	Adjusting block	2	59	Small screw rod	1
21	Washer	8	60	Connecting shaft	1
22	Washer	1	61	Block plate	2
23	Worm shaft	4	62	Connecting bushing	2
24	Block Plate	2	63	Bushing	1
25	Locking bolt M6X30	20	64	Locking bolt M10X30	1
26	Connecting shaft	2	65	Hex bolt M16X30	1
27	Upper roller	1	66	Handle	1
28	Hex Bolt M6X30	8	67	Connecting bushing	1
29	Connecting bushing	2	68	Bushing	2
30	Connecting bushing	2	69	Swivel handle	1
31	Nut M6	8	70	Pole of Handle	1
32	Bushing	1	71	Locking Nut M8	1
33	Connecting bushing	3	72	Hex bolt M8X45	1
34	Hex Bolt M8X20	2	73	Shaft	1
35	Sleeve	2	74	Locking bushing	1
36	Handle wheel	2	75	Hex bolt M12X50	1
37	Block plate	1	76	Bearing	2
38	Key 8x25	2	77	Hex bolt M10X16	1
39	Key 8x45	2	78	Sliding block	1
79	Limited block	1	89	motor	1
80	Sliding sleeve	1	90	Hex bolt M16X35	4
81	Lower (clamping)roller	1	91	Spring washer 16	4
82	Adjusting block	1	92	Bolt M16X40	4
83	Sleeve	1	93	Washer 16	8
84	Mat	1	94	Plate for motor	1
85	stand	1	95	Small chain wheel	1
86	Nut M12	8	96	Locking Bolt M8X16	2
87	Bolt M12X30	8	97	Key	1
88	Block plate	1	98	Nut M16	4

Note: This manual is only for your reference. Owing to the continuous improvement of the machine, changes may be made at any time without obligation on notice. And please note the local voltage while operating this electric machine.