




## RACING SNOW 2

### - SYNTHETIC PLUS -



**SPORT**

Standards: JASO FD - API TC

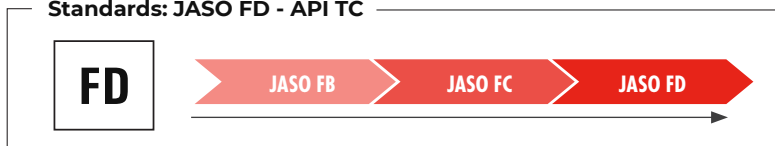

Racing Snow 2 is a high-end semi-synthetic anti-smoke lubricant, specially formulated for 2-stroke engines of snowmobiles, with liquid or air cooling, with or without exhaust valve. Its exclusive formulation protects the engine from extreme temperatures down to  $-45^{\circ}\text{C}$  and very high speeds. Smells of strawberry on the exhaust. SNOW 2 RACING is particularly suitable for sport and competition use, and approved for modern injection systems such as E-TEC.

● **PACKING UNITS:**



● **TECHNICAL DATA:**

TEST	METHOD	TYPICAL VALUES	MEASURE UNITS
DENSITY AT 20 °C	ISO 12185	0,863	G/cm <sup>3</sup>
VISCOSITY AT 100 °C	ASTM D445	7,9	mm <sup>2</sup> /s
VISCOSITY AT 40 °C	ASTM D445	51,9	mm <sup>2</sup> /s
VISCOSITY INDEX (VIE)	ASTM D2270	120	-
FLASH POINT	ASTM D92	146	°C
BOILING POINT	ASTM D97	-45	°C
TBN	ASTM D2896	2,1	mgKOH/g

