
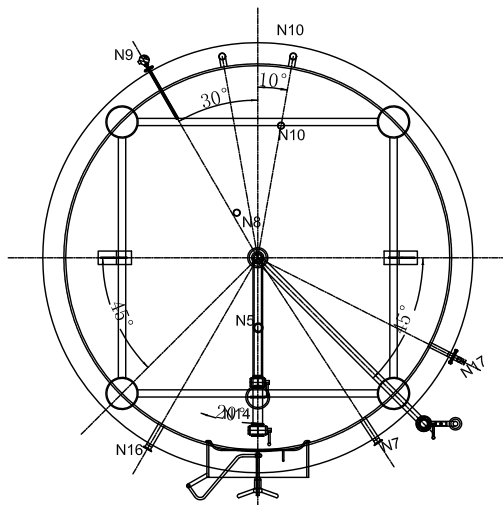


80BBL

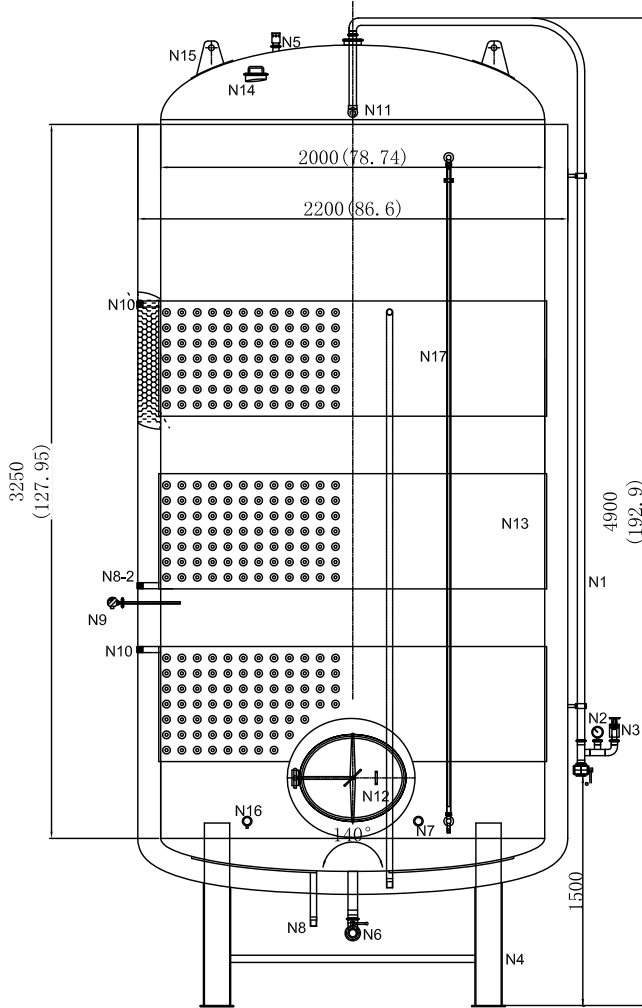

Technical Specs

	Interior	Jacket
Material	SUS304	SUS304
Working pressure psi	21.8	29
Design pressure psi	43.5	58
Tank Size	ø86.6"*192.9"	
Quantity(Nos)	1	
Cooling mode	Glycol	
Insulation material	Polyurethane	
Insulation thickness	4"	
Outer tank thickness	0.079"	
Inter tank thickness	0.157"	
Cover thickness	0.157"	
Cone angle	140°	
Effective volume BBL	80	
Total volume BBL	108	

Specification

Icon	Size	Connecting style	Name
N17	Ø1.5"		Level gauge
N16	Ø1.5"	Clamp	Sampling valve
N15			Hoisting ring
N14	Ø4"	Clamp	Dry hops adding port
N13	4"	Welding	Glycol jacket
N12	Ø22.8**18.9"	Quick-open	Manhole door
N11	Ø1.5"	Clamp	Cleaning ball
N10	1 NPT	Clamp	Glycol outlet
N9	½NPT	Clamp	Temperature probe
N8	1 NPT	Clamp	Glycol inlet
N7	Ø1.5"	Clamp	Carbonation port
N6	Ø2"	Clamp	Drainage valve
N5	Ø1.5"	Clamp	Safety valve
N4	Ø 6"	Welding	Supporting leg
N3	Ø1.5"	Clamp	Pressure relief valve
N2	Ø1.5"	Clamp	Pressure gauge
N1	Ø1.5"	Clamp	CIP pipe

Brewhouse Solutions LLC

80BBL BBT			
	Assembly Diagram		