



Product Description:

Designed to seamlessly control our Light Pipe and Tetra Series units, this all-in-one solution has 4 outputs that can be individually addressed within your preferred channel mode. To further enhance versatility, this powerful driver features multiple mounting points, allowing for easy wall mounting and clamp mounting. For easy production and installation implementation.

Four 96W Outputs

The unit is equipped with four 96W outputs. Each port can connect up to 96W of power. When using our Light Pipe series you can create many different combinations of lengths.

Wireless DMX

Using this function allows you to wirelessly control your DMX connected fixtures using a wireless DMX Connection.

IP 65

Resistant to water and protected from dust, this unit is perfect for outdoor venues and events.

Mechanical Specifications

IP Rating: 65

Housing: Aluminum Extrusion

Fastening System: M10 Clamp Mount Thread,

Mounting Holes, Accessory DIN Rail

Mounts

Power Connection: Seetronics SAC3FX IP-Rated

Connection (Nema 5-15 Cable

Included)

DMX Connection: 5-Pin XLR In and Out

Wireless DMX Connection: Lumen Radio Wireless DMX

Connection Receiver

Output Connection: Four (4) 5-Pin XLR Outputs

Electrical Specifications

Output Ports: Four (4)
Power Per Port: 96W

Drive Method: Constant Voltage

Power Consumption: 3.18 Amps

376 Watts

Power Supply: Electronic: Mean Well UHP-500-24

Output: 24V DC
Working Ambient Temp: 24 °F - 148 °F
Cooling: Internal Fan
Refresh: 4.000Hz

Power Input: 90-264V AC 50/60Hz

Control & Programming

Control Protocols: DMX 512

Operating Mode: 17 Pre-Programs Manual Settings Via Display


DMX 5 Modes: 1 Channel Mode Dimmer

2 Channel Mode Warm White, Cool White

3 Channel Mode R,G,B 4 Channel Mode R, G, B, W

7 Channel Mode Dimmer, R, G, B, W, Strobe, Macro

Size and Weight

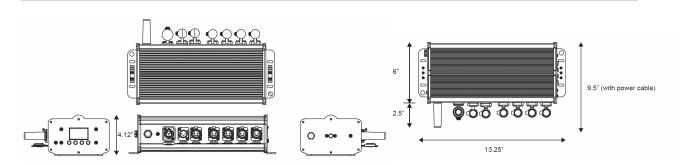

Fixture Size: Fixture Weight:

Packaged Size:

Packaged Weight:

13.25" X 9.5" X 4.12"

8.8 lbs

14.75" x 12" x 6.75"

9.8 lbs

Included Items

Tetra Driver 4
SEETRONICS SAC3FX IP
CONNECTION TO NEMA 5-15
CONNECTION CABLE

5071

CON-SEE-SAC3FX

Accessories:

DIN Rail Mount 5060

Customer Service

MEGA-Lite has a customer support line to provide set-up help and answer any questions should you encounter a problem. Please visit our website for any other related technical documents. For service-related issues, please contact our service department at **service@mega.lighting**

Operating Hours:

Phone: Email: Monday - Friday 9AM - 6PM CST (210) 684-2600

Sales@mega.lighting



18668 Highway 16N Helotes, TX 78023 Phone (210)684-2600 / Fax (210)855-6279 www.mega.lighting / info@mega.lighting