



## Mini URBAN Pendant

Please read the following instructions and warnings carefully before you assemble this product to ensure its safe and satisfactory operation.

### Warnings!

- This product is Class II and without grounding.
- It is recommended that this product is installed by a qualified electrician.
- This product is for indoor use only.
- This product should be fitted in accordance with IEC Regulations and the Building Regulations.
- To prevent electrocution, switch off the mains supply before installing or maintaining this fitting. Please ensure that other persons cannot restore the mains electricity supply without your knowledge.
- If you are in any doubt, please consult a qualified electrician.
- If replacing an existing fitting, make a note of the connections.
- Always use the correct type (E14) and wattage bulb (1xES Max 40W or 8W Energy Saving). Never exceed the stated wattage.
- When changing a bulb, always switch off the mains supply and allow the old bulb to cool down before removing it. Dispose of used bulbs carefully.
- The bulb and surrounding parts can become extremely hot during use.
- 230V~50/60Hz.


### Assembly Instructions:

1. Ensure the mains electricity supply is switched off at the fuse board.
2. If removing an existing fitting, note down all the wiring connections.
3. Carefully unpack the carton and make sure all parts are included (see drawing) before assembly.
4. Take the Brass painted insert (9) and fit it through the hole on the top platform of the shade (7). Inside the shade you fasten the plastic ring (8) tightly so insert and shade are fitted well together.
5. Demount the two screws (5) on the canopy (4)
6. Loosen the metal screw (6) below the canopy (4) and adjust the wire to the desired length
7. Attach metal bracket (2) to the ceiling using the two screws (3) and raw plugs (1) Make sure there are no hidden wires, water or gas pipes before drilling the holes
8. Make electrical connections as follows:  
Connect supply live (normally brown or red) to fitting live on the terminal block marked "L".  
Connect supply neutral (normally blue or black) to fitting neutral on the terminal block marked "N".  
Ensure electrical connections are tight and no loose strands of wire are left out of the connector block.
9. Move the canopy (4) upwards until it touches the ceiling. Secure the canopy (4) to the metal bracket by mounting the two screws (5) again. Tighten metal screw (6)

10. Fit the correct bulb type / wattage to the socket as indicated on the luminaire (bulb not included). **The wattage indicated must not be exceeded.**
11. Switch on the mains electricity supply at the fuse board.

### Care & Cleaning

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the product's finish.

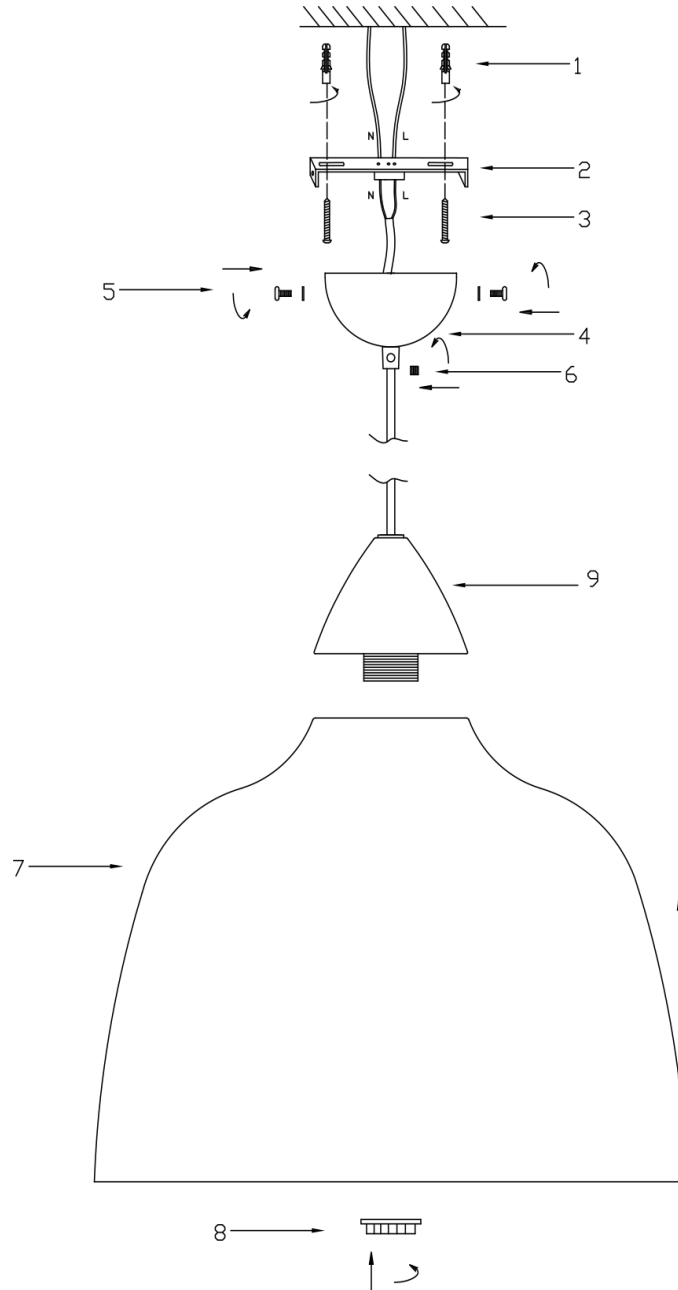

Please retain this information leaflet for future reference.

**Superlove ApS Nørregade 45 1165 Copenhagen K Denmark**  
**[www.superliving.dk](http://www.superliving.dk)**