



A Pressure Compensating, fixed diameter drip emitter. Gentle flow action with uniform coverage for all emitters on same supply tube.

### Features


- Patented design.
- Pressure Compensating maintains diameter of throw over a wide range of inlet pressures.
- Take-apart for easy inspection and cleaning.
- Coloured cap for easy identification.
- UV stabilised materials for long life.

### Applications


Pots, planter boxes, balcony, patio and landscape applications.



Shrubbler® 360° PC  
Barb 4 mm

Performance			 360°
NORMAL FLOW	PRESSURE (kPa)	FLOW (lph)	DIAMETER (m)
24 lph	100	24	0.3
	150	29	0.4
	200	33	0.4
	250	36	0.4
	300	38	0.4

### Flow Rate 360°

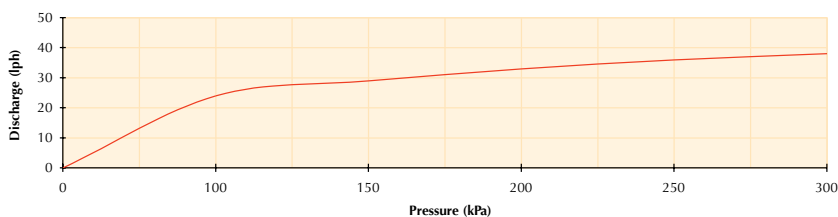

Shrubbler® 360° PC  
Spike 4 mm

### Shrubbler® 360° PC Fixed Flow

BASE TYPE	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
Barb 4 mm	31685	100	70	13.1
Spike	31695	25	60	8.7

### Specifications

DIMENSIONS ASSEMBLED		BARB	SPIKE
HEIGHT		25 mm	135 mm
WIDTH		20 mm	16 mm
DIAMETER		15 mm	26 mm
WEIGHT (approx)		1.7 g	5.4g
UV STABILISED MATERIAL	BASE CAP DIAPHRAGM	polypropylene polypropylene silicone	polypropylene polypropylene silicone
BASE/CONNECTION TYPE: Inlet		BARB 4 mm	BARB 4 mm