
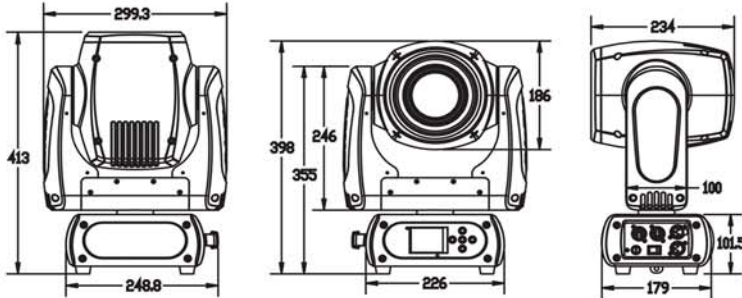


M1S75W

75W LED Spot Moving Head

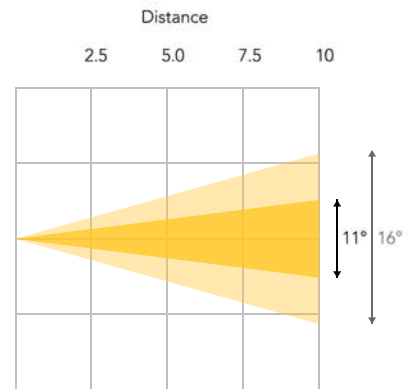

	Ø 0.48	Ø 0.96	Ø 1.44	Ø 1.93
LUX @ 11°	9,530	2,765	1,250	760
LUX @ 16°	4,723	1,280	632	393

Colour Wheel



GOBOS Wheel



MODEL	M1S75W
Description	75W LED Spot Moving Head
Series	Spot Head
POWER	
Power Consumption	160W
Line Voltage	100-240V AC
Frequency	50Hz to 60Hz
Power Connection	Neutrik® powerCON In

EFFECTS	
Dimming	0 - 100%
Strobe	0.5 Hz - 26 Hz
Zoom	11° - 16° (Manual Zoom)
Focus	Linear via DMX
Prism	3 Facet

CONTROL	
Operational Modes	DMX, Auto Program, Sound Active, Master / Slave
RDM	Yes
DMX Protocol	DMX512 (W-DMX™ Optional)
DMX Channel Mode	15 / 18 / 11 / 13
DMX Interface	3-Pin XLR
Display	2.4" Colour LCD Control Panel with back-up power

PHOTOMETRICS	
Light Source	75W White LED
Beam Angle	11° - 16°
Output (@2.5M)	9,530 lux at 11° 4,723 lux at 16°
PWM	1,200 Hz
LED Lifespan	60,000 hours

MOVEMENT	8-bit / 16-bit
Pan	630° (4.0s) / 540° (3.58s)
Tilt	265° (2.8s)

COLOUR 8 Colours + Open

GOBOS
Rotating 1 x 7 Patterns + Open
Interchangeable (outside Ø23mm, inside Ø18mm)

HOUSING	
Housing Materials	ABS & Steel
Housing Finish	Matte Black
Cooling	Multi Sensor Thermostat Controlled Variable Speed Fan
Dimension (mm)	299 X 234 X 413
Net Weight	10 kg
Rigging	1 x Omega Brackets with 1/4-turn

MISC
Road Case MCASE4SS

