
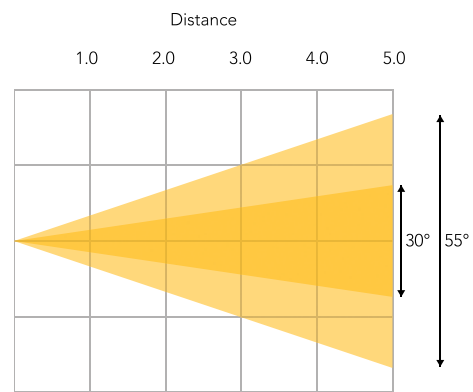
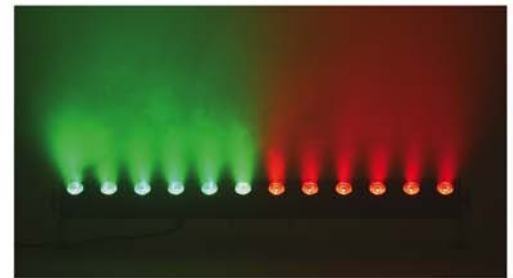


PIXBAR12X12

12 x 12W RGBWAU Pixel Control Bar

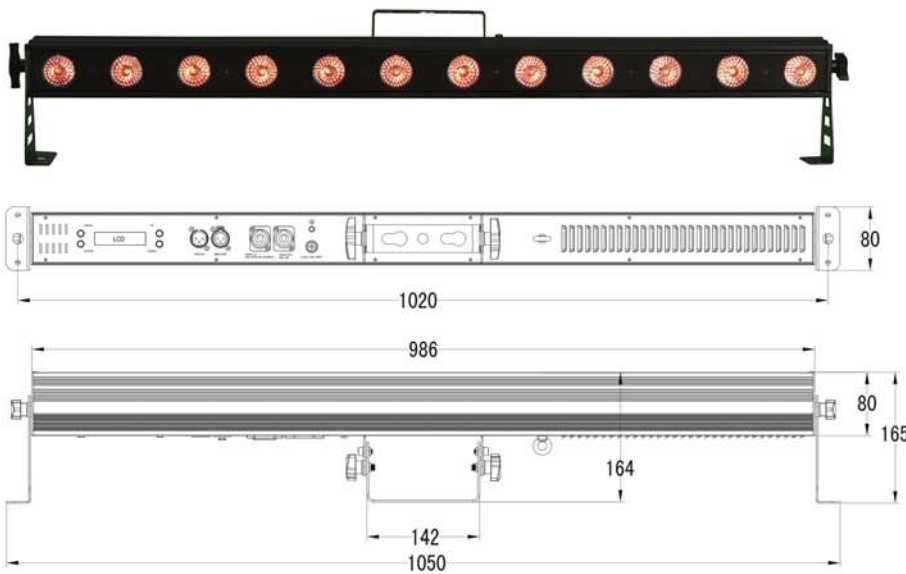

MODEL PIXBAR12X12

Description 12 x 12W RGBWAUV Pixel Control Bar

Series Pixbar

POWER

Power Consumption 150W

Line Voltage 100-240V AC

Frequency 50Hz to 60Hz

Power Connection Neutrik® powerCON In / Out

PHOTOMETRICS

Light Source 12 x 12W RGBWAUV LEDs

Beam Angle 30° (Optional 50°)

Output (@2M) 2,050 lux

PWM 12,000 Hz

LED Lifespan 50,000 hours

EFFECTS

Dimming (0 - 100%) 4 x 16-bit Dimming Curves

Strobe 1 Hz - 30 Hz

CONTROL

Operational Modes Static, Color Fade, Auto Program, Sound Active, Master / Slave & DMX Modes

Display 4-Button LCD Control Panel

DMX Protocol DMX512

DMX Channel Mode 3 / 4 / 6 / 8 / 12 / 24 / 72 / 74

DMX Interface 3-Pin XLR (Optional 5-Pin XLR)

HOUSING

Housing Materials Aluminium

Housing Finish Matte Black

Dimension (mm) 1050 X 165 X 80

Net Weight 4 kg

MISC

Road Case PIXBAR12CASE6WC

LUX @ 30°	∅ 0.54	∅ 1.07	∅ 1.61	∅ 2.14	∅ 2.68
R	913	375	190	119	87
G	1,164	486	250	156	113
B	1,157	468	240	154	109
W	1,706	678	351	219	158
A	673	257	135	189	67
U	290	116	59	36	26
Full	5,180	2,050	1,067	660	471

LUX @ 55°	∅ 1.04	∅ 2.08	∅ 3.12	∅ 4.16	∅ 5.21
R	528	175	90	57	43
G	1,100	380	197	131	85
B	520	170	80	50	40
W	1,200	405	208	135	95
A	630	207	112	75	50
U	92	31	16	10	6
Full	3,250	1,110	570	355	260

