

Pizza Prep Table





- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Self-Closing Swing Door
- Magnetic gasket can be replaced without any tools
- External: Stainless steel framework construction
- Internal: S/S 304 & coated aluminum & ABS plastic
- Auto defrosting and auto evaporation to prevent condensation
- Magnetic gaskets can be replaced without any tools
- Condensation pan efficiently evaporates excess water
- Adjustable, heavy-duty epoxy coated wire shelves, one shelf per door
- 1/6 size Polycarbonate GN pan and plastic cutting board included
- Easy to mount 3" casters (front casters with brakes) are standard with all units
- Temperature: 33°F to 40°F / 1°C to 4°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord




17.75" deep removeable cutting board



CPP-44-2D

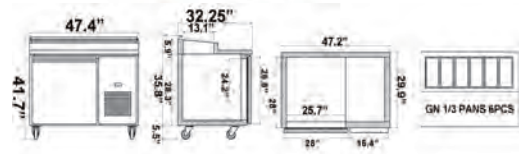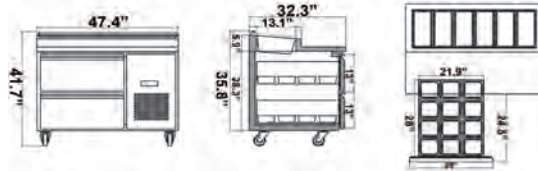

CPP-67-4D

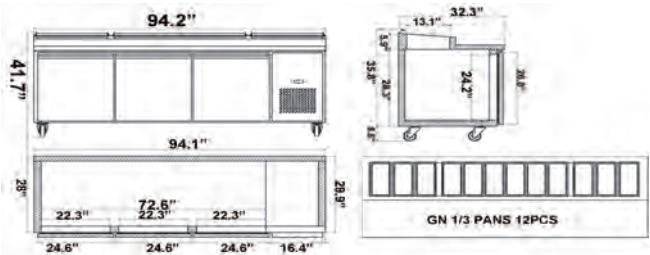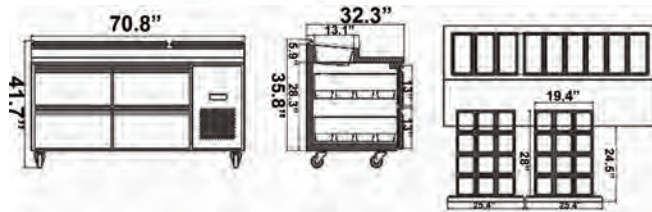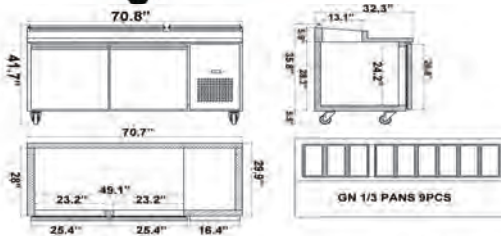

SPECIFICATIONS

Refrigerator

Model	Door	Drawer	1/6 Size	Ext. Dimensions W x D x H (in)	Int.. Dimensions W x D x H (in)	V/Hz/Ph	AMPS	HP	Storage Capacity(cu-ft)	NEMA PLUG	Ship Weight(lbs)	Ship Data W x D x H (in)
CPP-44	1		6	47.4x32.25x35.5/41.3	25.7x27.3x24.2	115/60/1	5A	1/2	12	5-15P	329	49.6x33.9x44.5
CPP-67	2		9	70.8x32.25x35.5/41.3	49.1x27.3x24.2	115/60/1	5A	1/2	22	5-15P	432	
CPP-93	3		12	94.2x32.25x35.5/41.3	72.6x27.3x24.2	115/60/1	5.5A	3/4	32	5-15P	582	
CPP-44-2D	2		6	47.4x32.25x35.5/41.3	25.7x27.3x24.2	115/60/1	5A	1/2	12	5-15P	348	
CPP-67-4D	4		9	70.8x32.25x35.5/41.3	49.1x27.3x24.2	115/60/1	5A	1/2	22	5-15P	432	



Certified To ANSI/NSF 7 Standards
If the data and structure update, without notice, subject to material object

