
Find a Location for Edge and Mount it


Select either the Dash Mount method or the Vent Mount method for your Edge. You will need a phillips-head screwdriver to complete the installation.





Dash Mount Method:



A. Select a flat surface for the Dash Mount with ample room for Edge. Avoid mounting on leather surfaces. Choose a location that doesn't interfere with the driver's vision or access to driving controls, one that won't interfere with the deployment of airbags or other safety equipment, and makes Edge easily accessible for operation. (Airbag locations are typically marked with "SRS" logos.)










B. Orient the adhesive foot so that Edge is easily accessible. Loosen the knob and adjust the adhesive foot to position 1 or 2, and then tighten it.












- **D.** Before you attach the Dash Mount to the dash, skip ahead and finish the remainder of the vehicle installation so that the cables are attached to the dock.
- **E.** Once the cables have been attached to the dock, clean the mounting surface in the vehicle with the alcohol preparation pad and let it dry thoroughly.
- F. Once the surface is dry, remove the adhesive liner. Press and hold the Dash Mount in place for 30 seconds. Allow the adhesive to cure for 2-4 hours.














Vent Mount Method:

A. Select a vent with ample room for Edge, one that won't interfere with the deployment of airbags or other safety equipment, and makes Edge easily accessible for operation. (Airbag locations are typically marked with "SRS" logos.)








B. Some vents have recessed louvers. If yours are recessed, remove the regular vent clamps and install the extended vent clamps.



- C. Attach the Vent Mount to the PowerConnect Vehicle Dock using the 4 provided screws.
- **D.** Before you attach the Vent Mount to the vent, skip ahead and finish the remainder of the vehicle installation so that the cables are attached to the dock.
- **E.** Once the cables have been attached to the dock, install the Vent Mount onto the vehicle vent. (Note that for clarity the illustrations below do not show the Vehicle Dock attached to the Vent Mount.)
- i. Insert the vent mount into the vent opening.
- ii. Push until hooked on the rear of the vent louver. Rest the foot against the bottom of the vent.
- iii. If necessary, adjust the tilt of the Vent Mount by repositioning the foot to a different tilt adjustment hole.








Mount the Magnetic Mount Antenna

- A. Mount the Magnetic Mount Antenna outside your vehicle, on a clean and dry horizontal surface that will always face the sky.
- B. Choose the location for the antenna according to your type of vehicle. Center it between the left and right sides, and away from other antennas.






















Route the Antenna Cable

- NOTE: These instructions are for a sedan or coupe where the intenna is mounted above the front windshield. The Edge User Guide (with Vehicle Kit) has detailed antenna cable routing instructions for all types of vehicles. Go to www.siriusxm.com/ guides for the User Guide.
- A. Tuck the antenna cable under the windshield rubber molding and run it to the nearest corner.
- **B.** Route the cable out of the molding and into the rubber weather stripping around the door opening.
- C. Lift the weather stripping. Tuck and run the cable inside it to the bottom of the door opening. Replace the weather stripping.
- **D.** Pull the cable out and route it to Edge.
- E. Plug the Magnetic Mount Antenna connector into the silver ANT connector at the rear the *Power*Connect Vehicle Dock.
- TIP: Include enough slack in your routing to accommodate open doors or the hood id. Coil any excess cable in a hidden location and keep it away from any vehicle






Verify Signal Reception

- A. Be sure the vehicle is outside and the antenna has a clear view of the sky.
- B. Verify that you are receiving the XM signal. The Edge Radio should be tuned to channel 1, the XM Preview channel. There should at least be two bars on the upper left corner of the screen that denotes antenna signal strength. If not, be sure that you have mounted the antenna on the outside of the vehicle, as shown in step 2, and that the vehicle is parked outdoors with a clear view of the sky. Move the vehicle away from any obstructed area, for example, if you are parked in a garage, or parked near a large structure.






C. You can also press **menu** and then turn the **Rotary Knob** to scroll to and highlight **Signal Indicator**. Press the **Select button**. The Satellite and Terrestrial bars show the strength of the signal being received. If the signal reception is good, press and hold **menu** to return to XM Preview channel 1.








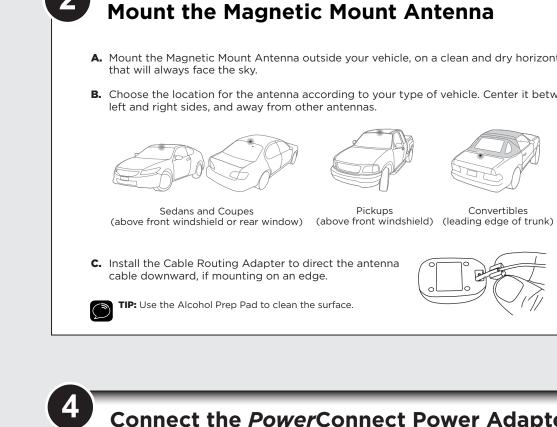



A. Insert the *Power*Connect Power Adapter into your vehicle's cigarette lighter or power adapter socket. Plug the other end into the **red PWR** connector on the rear of the PowerConnect Vehicle Dock.



B. Use the wire guide on the top of the dock to organize the wires connected to the dock.



C. Place Edge into the dock and press the **Power button**.





Dock & Play Radio

EDGE GUICK START GUIDE



Self installation instructions and tips are provided for your convenience. It is you responsibility to determine if you have the knowledge, skills and physical ability required to properly perform an installation. SiriusXM shall have no liability for damage or injury resulting from the installation or use of any SiriusXM of third party products. It is your responsibility to ensure that all products are installed in adherence with local laws and regulations and in such a manner as to allow a vehicle to be operated safely and without distraction. SiriusXM product warranties do not cover the installation, removal or reinstallation of any product

Sirius XM Radio Inc. 1221 Avenue of the Americas New York, NY 10020

siriusxm.com

1.866.635.2349

© 2013 Sirius XM Radio Inc. SX1EVKQSG 130227a

Connect the Audio

Decide on one of the following in-box audio connection options. You can also refer to "Connect the Audio" in the Edge User Guide (with Vehicle Kit) for additional audio connection options, such as a cassette adapter or the FM Direct Adapter (FMDA) (both sold separately). Go to www.siriusxm.com/ guides for the User Guide.

Option 1: Best: Use the provided Aux In Cable, if your vehicle's stereo system has an auxiliary input

A. Plug one end of the cable into the **green AUDIO** connector on the *Power*Connect Vehicle Dock and the other end into the auxiliary input jack on the vehicle's stereo system.



FM 1 97.9 curren

Edit FM Channel 2

99.3 FM

Turn Rotary Knob to tune nd press Select to confir

FM Channel 2

Start Using

Edit Channel

FM 4 ___

- **B.** Turn on your vehicle's stereo system and set it to play from the auxiliary input source.
- C. You should now hear channel 1, the XM Preview channel.
- D. Go back to Step 1 "Find a Location for Edge and Mount It" on the opposite side and finish installing the Dash or Vent Mount. Then the installation is complete.
- TIP! Refer to your vehicle's owner's manual to find the location of the auxiliary input jack, or consult the

Option 2: Good: Use the PowerConnect feature of Edge. PowerConnect plays the XM audio through vour vehicle's FM radio.

- A. Find and make a list of all available FM channels in your area that are not being used by an FM radio station.
- B. Pick the first FM channel on your list. Tune your vehicle's FM radio to this FM channel.
- NOTE! If you are using the Vehicle Dock from the Universal Xpress Car Kit instead of the PowerConnect Vehicle Dock which came with your Edge, you will have to lisable AUX Detect. Refer to "Using the Vehicle Dock From the Universal Xpress Car Kit" in the Edge User Guide (with Vehicle Kit), and complete the additional instructions before continuing with the next step. Go to www.siriusxm.com/guides. The audio connection will be through your vehicle's FM radio, but it is not
- C. Set your Edge to transmit on the same FM channel that you have selected on your vehicle's FM radio:
- FM 3 ___ i. Press menu and then turn the Rotary Knob to scroll to and highlight FM Settings. Press the Select button.
- ii. FM Channels will be highlighted. If it is not, turn the Rotary Knob to scroll to and highlight FM Channels. Press the Select button.
- iii. Turn the Rotary Knob to scroll to and highlight FM2. Press the Select button
- iv. Turn the Rotary Knob to tune in steps of .2, or press ◀ and ▶ to tune in steps of 1 to select the available FM channel you have chosen. Press the **Select button** to select the FM channel.
- v. Start Using will be highlighted. Press the Select button.
- vi. The selected FM channel will be confirmed on the display screen.
- **D.** You should hear XM channel 1 through your vehicle's FM radio. If you are satisfied with the sound quality, go back to Step 1 "Find a Location for Edge and Mount It" on the opposite side and finish installing the Dash or Vent Mount. Then the installation is complete.
- **E.** If you are not satisfied, move to the next FM channel on your list and repeat the process. Continue until you have found an FM channel with which you are satisfied.



You can follow either the general activation and subscription process or use the on-board activation guide to activate your Edge and subscribe to the XM service.

General activation and subscription process:

- A. Make sure your Edge is turned on, receiving the XM signal, and tuned to XM channel 1 so that you can hear XM audio.
- **B.** Make a note of your XM Radio ID. You can find it by selecting Radio ID in menu items, by tuning to channel 0, on a label on the bottom of the gift box, and on the label on the back of your Edge.

NOTE! The XM Radio ID does not use the letters I, O, S, or F.

- C. To subscribe:
 - Online: Go to www.siriusxm.com/activatenow to access or set up an online account, subscribe to the service, and activate your Radio.

• By phone: Call 1-866-635-2349.

Activation usually takes 10 to 15 minutes after you have completed the subscription process, but may take up to an hour. We recommend that your Radio remain on until subscribed. Once subscribed, the Radio will receive and you can tune to the channels in your subscription plan.

categories of channels. Learn what all the buttons do in the panel below.

Activation guide:

Power Button

Press to turn

Rotary Knob

preview and

through the

also scroll

options.

Buttons

tune to channels

through lists and

Pause and Replay

Pause, rewind, and

minutes of live radio

replay up to 30

highlight menu

channel lineup;

Rotate to

Radio on and

For your convenience, Edge has an on-board activation guide. You can activate your radio and

subscribe to the XM service by using this guide, where you will be guided step-by-step through the subscription process. To access and use the guide, simply follow these steps:

- **A.** Turn Edge on and press the **menu button**. B. Activate Radio will be highlighted. Press the Select
- C. Follow the directions on each successive screen unt you complete the subscription process.

Edge Button Functions

and configuration options; in

Press to access advanced features

return to main display screen.

configuration options, press and hold

Press to directly access traffic

and weather for the city of your

choice; or press it to go back to

the previous channel to which you were listening.



Press to access and cycle through

Press to tune to a stored favorite

channel, press and hold to store

a favorite channel; also enter a

Press first before entering the

Press to confirm selection of

Left and Right Buttons

channel number, to directly tune to

highlighted items in a menu or list,

Press to search for channels by

FM presets.

Number Buttons

channel number.

Direct Button

-Select Button

category.

866-635-2349

The phone number shown above may differ from the one shown or your Edge. All numbers are valid

Specifications

Edge Main Display

When listening to a channel,

The Edge User Guide (with

www.siriusxm.com/guides.

vehicle kit) is available at

information about the channel

and what is currently playing is

displayed.

Power Requirements: 9-16 V DC.500 mA (max)

Operating Temperature: -4°F to +140°F (-20°C to +60°C) 1.0 V_{rms} (max) Audio Output:

Edge Radio

4.6 in (W) x 2.6 in (H) x 0.7 in (D) Dimensions 117 mm (W) x 65 mm (H) x 17 mm (D)

1.6 oz (46 a)

3.4 oz (95 g)

PowerConnect Vehicle Dock

4.0 in (W) x 2.6 in (H) x 1.2 in (D) Dimensions: 102 mm (W) x 65 mm (H) x 31 mm (D)

Audio Connector: 1/8 in (3.5 mm) female Antenna Connector: SMB male

Weight:

PowerConnect Power Adapter

3.7 in (W) x 1.7 in (H) x 1.3 in (D)

94 mm (W) x 43 mm (H) x 34 mm (D) 2.4 oz (69 g)

Input / Output: Cable Length:


XM Magnetic Mount Type:

1/8 in (3.5 mm) stereo male to









What's in the Box?

rehicle is parked in a safe location.


CAUTION: Do not attempt to install, activate, or adjust any of the

6 (7) (8) (9) (0)

setting options described in this Quick Start Guide unless your

Edge Radio

PowerConnect Power Adapter







PowerConnect™ Vehicle Dock Vent Mount and Extended Vent Clamps

Important Legal Information

2013 Sirius XM Radio Inc. "Sirius", "XM" and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. "BBC" and "Radio One" are trademarks of the British Broadcasting rporation and are used under license. BBC logo © BBC 1996. Radio 🛘 logo © BBC 2001. Cosmopolitan® is a registered trademark of Hearst Communications, Inc. Elvis Radio logo © EPE Reg. U.S. Pat & TM off. IndyCar (and Design) are registered trademarks of Brickyard Trademarks, Inc., used with permission. Major League Baseball trademarks and copyrights are used with permission of Major eague Baseball Properties, Inc. Visit the official website at MLB.com. Games subject to availability and change and may not include all spring training games. All rights reserved. NASCAR® is a registered rademark of the National Association for Stock Car Auto Racing, Inc. The NBA identifications are the intellectual property of NBA Properties, Inc. and the respective NBA member teams. © 2013 NBA Properties Inc © 2013 NFI Properties LIC. All NFI-related trademarks are trademarks of the National Football League NHI, and the NHI, Shield are registered trademarks of the National Hockey League ONHI 2013. All NHI logos and marks and NHI team logos and marks depicted herein are the property of the NHI, and the respective teams and may not be reproduced without the prior written consent of NHL Enterprises. L. P. The Home Ice (Channel is a registered trademark of XM Satellite Padio Inc. The Swinger Golfer Logo is a registered trademark of PGA TOLIR. Inc. Visit www.siriusym.com. channellineup for updates. All programming/channel lineup/XM service subject to change or preemption. All other marks and logos are the property of their respective owners. All rights reserved

IMPORTANT NOTICE: REQUIRED SUBSCRIPTION

Hardware and subscription sold separately, and activation fee required. Other fees and taxes may apply, Subscriptions governed by SirjusXM Customer Agreement; see www.siriusxm.com. Prices and programming are subject to change. Service automatically renews into the subscription Package you choose (which may differ from the Package which arrived with the Radio), for additional periods of the same length, and automatically bills at the then current rates, after any complimentary trial or promotional period ends, until you call us at 1-866-635-2349 to cancel. XM U.S. Satellite service available only to those at least 18 years of age in the 48 contiguous USA and DC, while SiriusXM Internet Radio is available throughout our satellite area and also AK, HI and PR.

FCC Statement: The user is cautioned that changes or modifications not expressly approved by Sirius XM Radio Inc. can void the user's authority to operate this device. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference. 2. This device must accept any interference received including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the installation instructions, may cause harmful interference to radio communications. However, there is no quarantee that interference will not occur in a narticular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct th interference by one or more of the following measures: •Regrient or relocate the receiving antenna of the affected receiver •Increase the senaration between the SiriusXM equipment and the affected receiver. •Connect the SiriusXM equipment into an outlet on a circuit different from that to which the affected receiver is connected. •Consult the dealer or an experienced radio/TV technician for help WARNING! The FCC and FAA have not certified this Satellite Radio Receiver for use in any aircraft (neither portable nor permanent installation). Therefore, Sirius XM Radio Inc. cannot support this type of application or installation.



Antenna Signal Category Name (displayed

Strength _ briefly as channels are tuned)

Song/Program Title or Talk Show Schedule or Game Time/Game Details

or Sports Teams/Score

Channel Number





9-16 V DC / 5 V DC, 1.5 A 4 ft 7 in (1.4 m)

Vehicle Antenna

Connector: SMB female, right angle 23 ft (7.0 m) Cable Length:

Aux In Cable

Connectors 1/8 in (3.5 mm) stereo male

Cable Length: 4 ft (1.2 m)

