

## Thermoelectric cooler TG 3152-24V Recessed



### Product Features

**Order Number:** 3152303

**Housing Material:** Stainless steel AISI 304 (V2A)

**Ingress protection:** IP 66, Type 4X

**Note:** The torque for the mounting nuts should be 4.5 Nm.

**Approvals:** CE, RoHS, cURus

**Accessories:**



Temperature controller (heating / cooling)



Electronic thermostat (cooling)



Condensate kit



Wall Mounting Kit


**Taric Code:** 84158300

## Technical data TG 3152-24V Recessed

<b>Cooling capacity 95F/95F:</b>	510 BTU
<b>Temperature range:</b>	-4°F - 149°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 70 / 153 cfm Cabinet air circuit: 35 / 100 cfm
<b>Mounting:</b>	Recessed
<b>Dimension H x W x D:</b>	15.7 x 7.1 x 6.7 inch
<b>Weight:</b>	20 lbs.
<b>Cut out dimensions:</b>	14.6 x 6.1 inch
<b>Voltage / Frequency:</b>	24 V DC
<b>Current 95F95F:</b>	7 A
<b>Starting current:</b>	11 A
<b>Max. current:</b>	7.5 A
<b>Nominal power 95F95F:</b>	170 W
<b>Max. power:</b>	180 W
<b>Fuse:</b>	10 A (T)
<b>Connection:</b>	Connection terminal block


Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview product group Thermoelectric coolers](#)

**Performance Graph:**

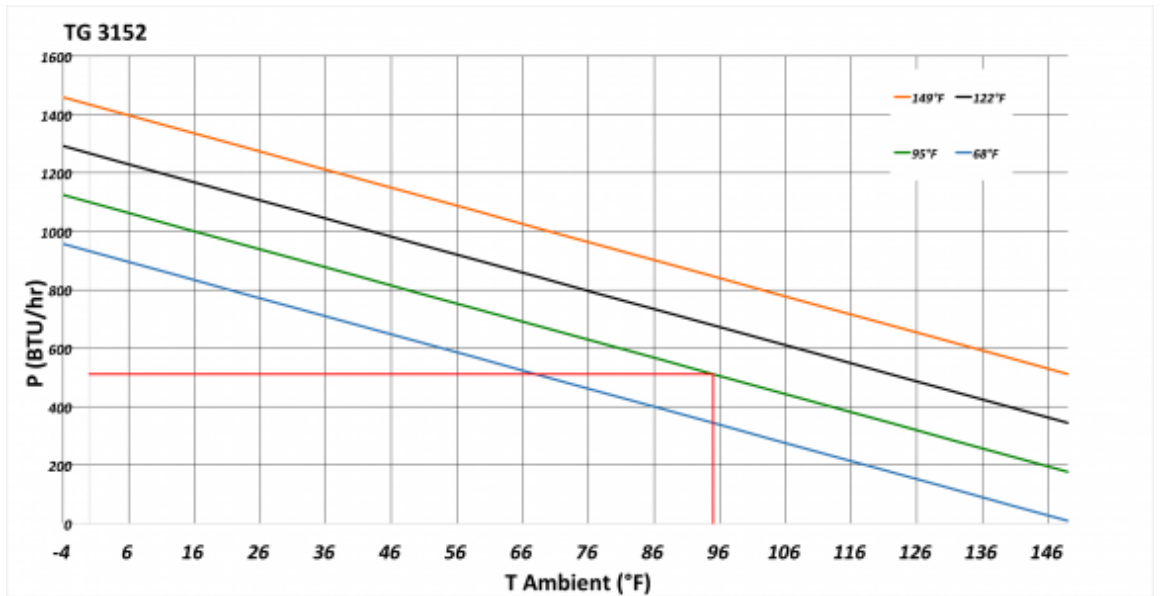


click image to enlarge

**Air flow:**

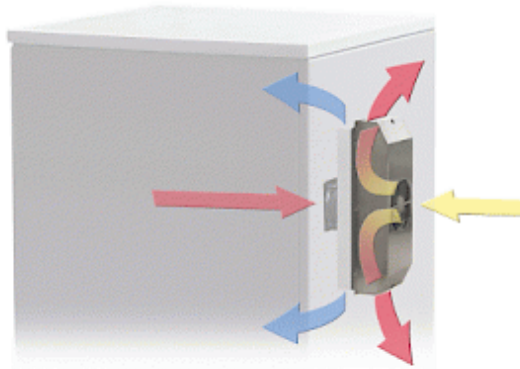

click image to enlarge

**Cut out dimensions:**

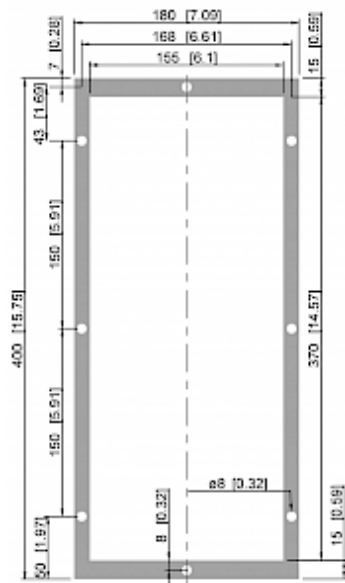

click image to enlarge

**Product Accessories:**



[click image to enlarge](#)