

Thermoelectric cooler TG 6155-230V Recessed



Product Features


Brand Name:	SoliTherm Peltier
Order Number:	6155303
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 66, Type 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, RoHS, cURus
Accessories:	Peltier Condensate Kit Wall Mounting Kit
Taric Code:	84158300

Technical data TG 6155-230V Recessed

Cooling capacity 95F/95F:	510 BTU
Temperature range:	-4°F - 149°F
Air volume flow (system / unimpeded):	Ambient air circuit: 70 /153 cfm Cabinet air circuit: 35 / 100 cfm
Mounting:	Recessed
Dimension H x W x D:	19.7 x 13 x 7.7 inch
Weight:	36 lbs
Voltage / Frequency:	120 - 230 V ~ 50/60 Hz
Current 95F95F:	1.4 A @ 120 V 0.7 A @ 230 V
Starting current:	2.1 A @ 120 V 1.1 A @ 230 V
Max. current:	1.5 A @ 120 V 0.8 A @ 230 V
Nominal power 95F95F:	170 W
Max. power:	180 W
Fuse:	3 A (T) @ 120 V 2 A (T) @ 230 V
Connection:	Connection terminal block

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Thermoelectric coolers](#)

Performance Graph:

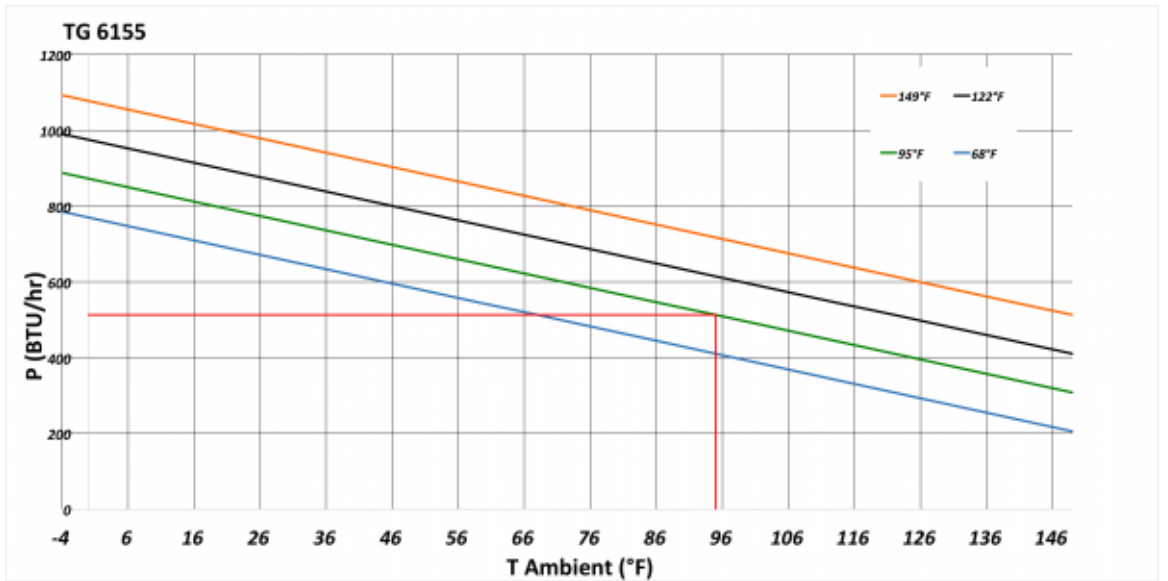

click image to enlarge