

ARS-7231-AC Series

Industrial Dual Radio 802.11 a/b/g/n/ac WiFi Access Point/Client/Bridge/Repeater with Router Capabilities



Features


- ▶ Industrial 2x2 MIMO
- ▶ Qualcomm Atheros QCA9892
- ▶ Supports IEEE 802.11 a/b/g/n/ac
- ▶ Supports 2*10/100Base-TX WAN/LAN Ports
- ▶ Tx Power 21 dB for 2.4GHz
- ▶ Tx Power 18 dB for 5GHz
- ▶ WPA, WPA2, TKIP, AES
- ▶ Power input: 9~48VDC in 6-Pin Terminal Block
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail and Wall Mountable
- ▶ Operating Temperature – STD: 0°C to 60°C; EOT: -35°C to 70°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' ARS-7231-AC Series is a dual radio industrial 802.11a/b/g/n/ac wireless LAN access point with added router capabilities. Embedded with the Qualcomm/Atheros QCA9892 chipset, it boasts network robustness, stability, and a wide network coverage with a very low voltage input of 9V. Based on IEEE 802.11 a/b/g/n/ac, the access point supports high-speed data transmission of up to 867Mbps.

The ARS-7231-AC series is capable of operating in different modes, which makes it suitable for a wide variety of wireless applications including long-distance deployments. The unit also allows the user to position the wireless antennas in a better signal-broadcasting location for improved wireless coverage and signal strength or simply in a more convenient location.

DIMENSIONS

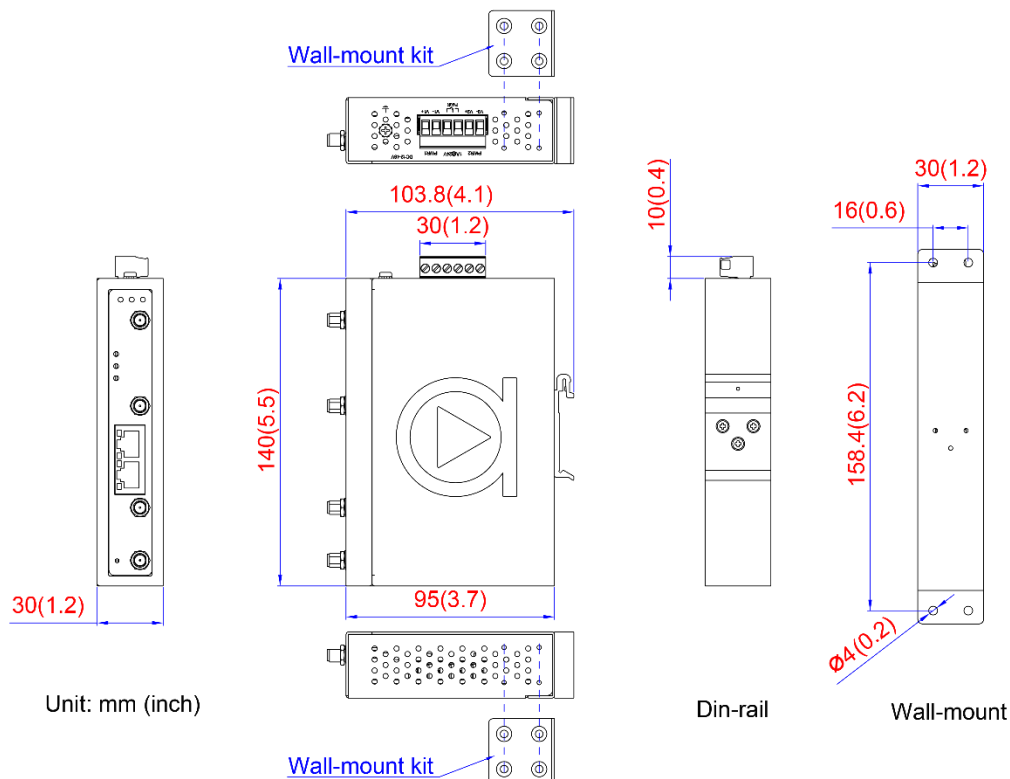

SPECIFICATIONS

Technology	
Protocol	IP, TCP, UDP, ARP, BOOTP, ICMP, HTTP, HTTPS, DNS Proxy, NTP, RADIUS, Dynamic DNS, SNMP
IEEE	IEEE 802.11 b/g/n/ac IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet
WLAN Operation Mode	AP/Client/Bridge/Repeater
Encryption Security	WPA, WPA2, WPA3, WEP, TKIP, AES
Interface	
Ethernet Port	2*10/100Tx
WLAN	Dual Radio
Antenna	4*External Antenna
LED Indicators	Power, Fault, Wi-Fi Signal, Link, Activity
Mechanical Characteristics	
Housing	Metal, IP30 Protection
Dimensions	26 x 95 x 75mm (W*H*D)
Weight	Unit: 0.60 lb. Shipping: 1.0 lb.
Mounting	DIN-Rail, Wall Mounting

Power Requirement	
Input Voltage	9~48VDC, Redundant Input
Power Connection	6-Pin Terminal Block
Reverse Polarity Protection	Present
Overload Current Protection	Present
Power Consumption	8 Watts
Environmental Limits	
Operating Temperature	STD: -10° to 60° C EOT: -35° to 70° C
Storage Temperature	-40°C ~ 90°C
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B CE EN 55032 EN301489-1/-17 FCC Part 15 Subpart B CNS13438 AS/NZS CSIPR 32
EMS	CE EN 55024 IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field) IEC61000-4-11
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE
Warranty	5 Years

ORDERING INFO

ARS-7231-AC	Industrial Dual Radio 802.11a/b/g/n/ac WiFi Access Point/Client/Bridge/Repeater with Router Capabilities; STD: -10°C to 60°C
ARS-7231-AC-T	Industrial Dual Radio 802.11a/b/g/n/ac WiFi Access Point/Client/Bridge/Repeater with Router Capabilities; EOT: -35°C to 70°C