Model S0000-AL2

Electric Alarm with Flashing Light and Horn



SPECIFICATIONS:

Model S0000-AL2 is an electric alarm with flashing amber light and horn. A flow switch activates the light and horn when the fixture is in use. The flow switch has DPDT, double pole double throw contacts which allow for remote monitoring (by others).

Weatherproof light, horn, junction boxes, flexible conduit and flow switch comply with NEMA type 4 requirements.

STANDARD EQUIPMENT:

Horn: UL LISTED, NEMA type 4X horn that provides a distinctive audible signal with a volume preset at 90 dB at 10 feet (adjustment screw on the horn permits changes to the sound level).

Flashing Light: UL LISTED, NEMA type 4X flashing amber light is provided.

Flow Switch: Weatherproof, UL LISTED 1-1/4" NPT, DPDT double pole, double throw, 125 volts, 5 amp flow switch.

Mounting: The unit is provided with a bracket for mounting the alarm and light on a vertical pipe or wall.



OPTIONAL ACCESSORIES:

Additional costs may be incurred

□ -ASW NEMA type 4X, Audible Alarm Silencing Switch

☐ -C1D1 Class 1, Division 1 □ -C1D2 Class 1, Division 2 ☐ -240V 240 volts, 50 hertz





Acorn Safety assumes no responsibility for use of void or superseded data. © Copyright Acom Safety®, City of Industry, CA, Division of Acom Engineering Company®, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

Submittal # S0000-AL2 [ACC] Date: 08/30/17

Product complies to the following standards:



Acorn Engineering Company®, Morris Group International™


ACORN SAFETY P.O. Box 3527 City of Industry, CA 91744 U.S.A. Phone 800-591-9372 626-855-4804

www.acorneng.com

TECHNICAL DIMENSIONS

All dimensions are subject to manufacturer's tolerance of plus or minus 1/2" nominal and subject to change without notice. Acorn Safety® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. © Acorn Safety®, A Division of Acorn Engineering Company®, Member of Morris Group International™. Please visit www.acorneng.com for most current specifications.

☐ Model S0000-AL2: Electric Alarm with Flashing Light and Horn

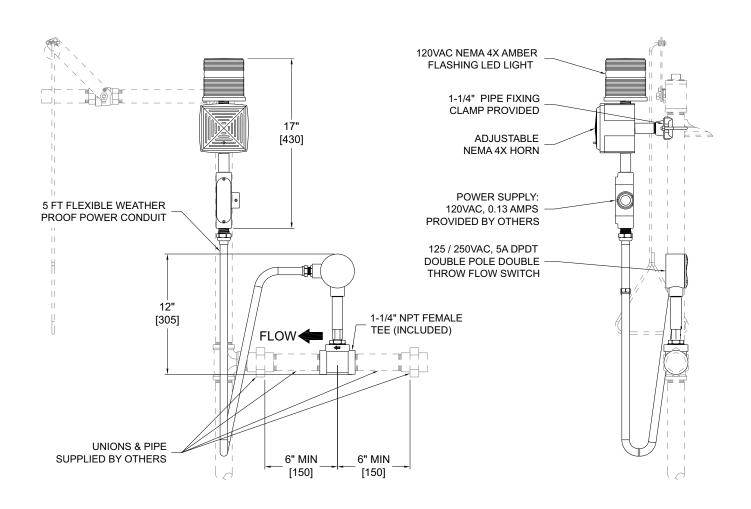

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- 2. FLOW SWITCH SHALL BE INSTALLED VERTICALLY WITH HORIZONTAL FLOW.
- 3. DIRECTION OF WATER FLOW MUST BE IN SAME DIRECTION AS SHOWN ON FLOW SWITCH.
- 4. HORN INCLUDES AN EXTERNAL ADJUSTMENT SCREW AND MAY BE ADJUSTED FROM 73 dB TO 103 dB AT 10 FEET.

▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

\$0000-AL2 Date: 08/30/17

Acorn Safety warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Acorn's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Acorn is notified in writing within one year from date of shipment, F.O.B. Industry, California.

UMMARY L FOR URING	Model Number & Options	Quantity	ACORO
lg ₹Ē	Company		G SAFETY
CTION SI PPROVA NUFACT	Contact	Title	800-591-9372
SELEC & A MAI	Signature (Approval for Manufacturing)	Date	or 626-855-4804 www.acorneng.com