




POLYURETHANE DIPPED



GL401

Nylon | Polyurethane

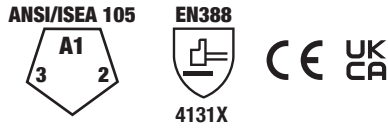

ANSI/ISEA 105 – CUT A1 | ABRASION 3 | PUNCTURE 2
 EN388 – ABRASION 4 | CUT 1 | TEAR 3 | PUNCTURE 1 | CUT TDM-100 X

Polyurethane coating on the palm and fingers for good grip and precision handling // 13 gauge nylon liner is strong yet lightweight // Glove design offers excellent touch sensitivity and low particulate shed // Knit cuff creates a snug fit to keep out debris // Hangtag option for retail display // Packaging option for vending machines available

Suggested Applications

Construction // Electronics // General Purpose // Parts Assembly // Quality Control and Inspection

Glove Breakdown

Type: Dipped Glove
Material: Polyurethane
Outer Liner: 13 Gauge Nylon
Cuff: Nylon + Latex Elastic

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov
 This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Packaging

	Inner Polybag	Outer Polybag	Case
GL401	–	12 Pair	120 Pair
GL401HT	–	12 Pair on Hangtags	120 Pair
GL401VP	1 Pair Rolled	12 Pair	120 Pair
Made in China			

Product markings may vary // Updated as of 04.23



Glove Sizing

GL401 XS – 3XL | GL401HT XS – 3XL | GL401VP S – XL

X-Small	Small	Medium	Large	X-Large	2X-Large	3X-Large
6	7	8	9	10	11	12

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

