




Metal guard system supplied as part of a comprehensive kit.

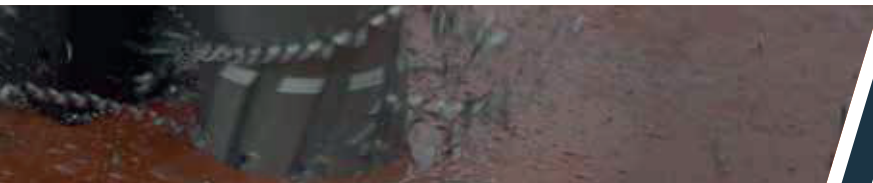

The MAX50T is a unit with exceptional characteristics, blending light weight portability with powerful capacity. All day broaching capability up to 50mm diameter is combined with a forward reverse, variable speed motor that will tap holes up to M20 diameter.

Each machine comes in a robust plastic site carrying case with foam inserts to protect the machine and accessories. Free accessory pack contains: removable internal coolant system, bottle of broaching lubricant, safety pack with gloves, specs, ear plugs, removable metal guard, safety chain, 4 hex keys.

Use with VersaDrive Morse Taper 2 Arbor to quickly convert for use with all VersaDrive Tooling. See Page 39.

LIGHTWEIGHT & POWERFUL ALL ROUNDER FOR BROACHING, DRILLING, REAMING, COUNTERSINKING & TAPPING.

Technical Specifications

CUTTER SIZE RANGE	12-50mm
MAX CUTTER LENGTH	110mm
TWIST DRILL RANGE	3-22mm
TAPPING RANGE	M3-M20
COUNTERSINKING	40mm
REAMING	18mm
LENGTH	320mm
WIDTH INC HANDLES	210mm
HEIGHT	385-550mm
STROKE	170mm
WEIGHT	14 Kg
MAGNET SIZE (L x W)	170x85mm
MAGNETIC FORCE	1850 Kg
MOTOR POWER	1375 W
SPEED/s (RPM)	1) 100-280 2) 185-530
ARBOR	Morse Taper 2
TAKES CHUCK	Yes
COOLANT SYSTEM	Integrated