


## Pleo-14.4-S LED Striplight

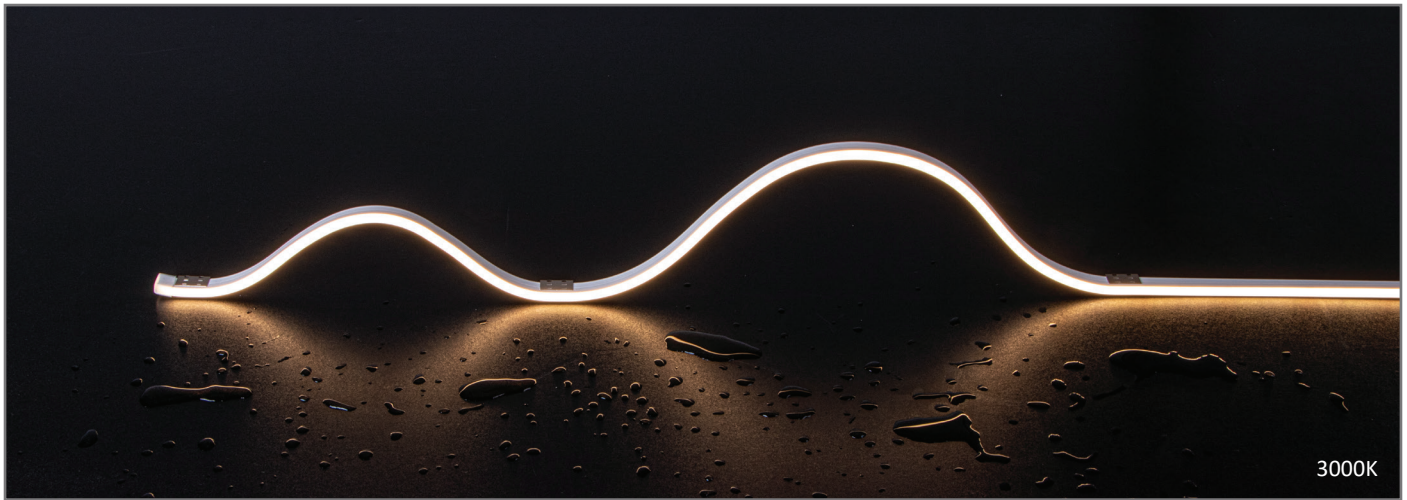

### Description

Create a vibrant living or working space with the latest Pleo Series Neon Flex lighting technology from Domus Lighting. The Pleo series is available in both a front facing and side facing view to suit both horizontal and vertical illumination applications in a low voltage and safe polyurethane enclosure complete with mounting clips for easy installation. Available in three colour temperatures with a high CRI90 colour rendering index and high weatherproof rating, this latest addition from Domus Lighting will be the perfect solution for your flexible lighting needs including illuminating ceiling and floor coves, windows, walls, signs and much much more.

### Specification Features

|                              |                               |
|------------------------------|-------------------------------|
| Colours:                     | 3 colours                     |
| Light Source:                | 2835 SMD LED                  |
| LED Type:                    | San'an                        |
| Colour Temperature:          | 3000K, 4000K & 5000K          |
| Lumen Output per metre:      | 320lm, 330lm, 346lm, 370lm    |
| CRI:                         | 90                            |
| Number of LED per metre:     | 140                           |
| Wattage per metre:           | 14.4W                         |
| Input Voltage:               | 24VDC                         |
| Beam angle:                  | 120°                          |
| Wiring:                      | Parallel                      |
| IP Rating:                   | IP66                          |
| Cutting Increments/Sections: | 50mm                          |
| Requires:                    | 24VDC constant voltage driver |
| Dimmable:                    | Yes*                          |
| IES files:                   | Yes**                         |

\* For dimming options please refer to the controller section for further details.

\*\* Available upon request.




4000K



5000K

### Diagrams / Additional

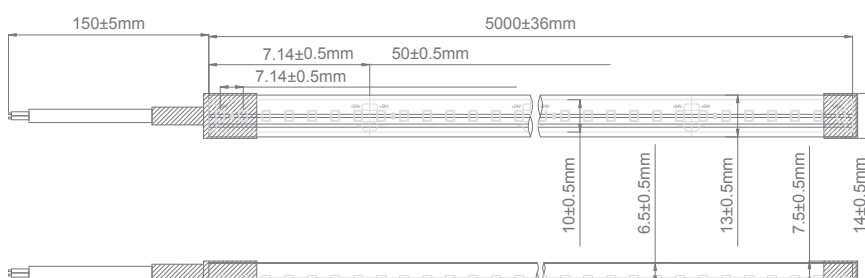

| Item No.    | Variant | Colour Temperature |
|-------------|---------|--------------------|
| Pleo-14.4-S | 20357   | 3000K              |
|             | 20358   | 4000K              |
|             | 20359   | 5000K              |