



Scan to explore
RDTL8 online

Resiled RDTL8

8W Recessed Adjustable Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
RDTL8	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)			B (Black)	

Order Code **RDTL84-WB-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/resiled-RDTL8

Physical Characteristics

Trim Colour	White Black
Tilt Angle	20°
Dimensions	Ø100 x 102 (H) mm
Spring Height	50 mm
Cutout	Circular 92 mm
Weight	220 g

Dimensions (mm)

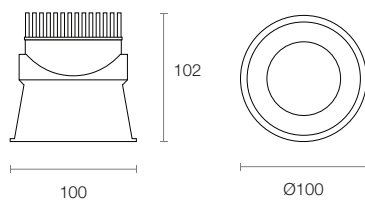

 Cutout Ø92 mm

Product Features

- Recessed adjustable LED downlight, manufactured with an aluminium body and powder coat finish
- Deep recessed trim design provides excellent glare control, improving visual comfort
- Covering 92 mm cutout size, an ideal replacement for existing downlights
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics

Based on RDTL84-WB-W-LT

LED Power	8.5W
LED Type	COB
Lumen Output	1050 lm
Luminous Flux	891 lm
Efficacy	82.5 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	10.8W Typical
Driver Model	Trend 150208-250 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 250mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge

General Characteristics

Category	Downlights
Family	Resiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	IC-4
Ingress Protection	IP20



Scan to explore
RDTL8 online

Resiled RDTL8

8W Recessed Adjustable Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
RDTL8	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	LT (Leading & Trailing Edge)
	4 (4000K)			B (Black)	

Order Code **RDTL84-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/resiled-RDTL8

Trim Colour



W
White Trim



B
Black Trim